



LED Tubular Lamp



LED T8 Global Pro Glass (UL Type B)

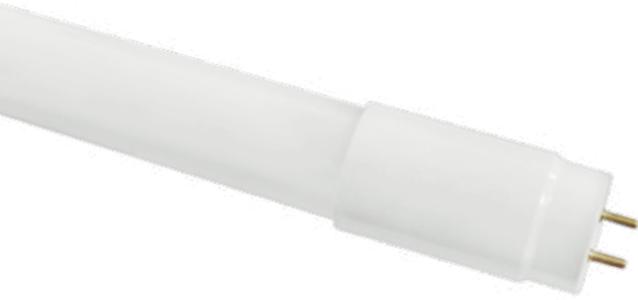

- Energy saving up to 43% compare to F32T8 system
- Perfect retrofit traditional lamps with higher system efficacy
- 280° beam angle allows fixture to maintain original light distribution by parabolic reflector
- Smooth operation even at low temperatures down to -20°C
- Ra90 available on request
- No mercury and hazardous substances
- Full glass body with safety approval



Model	Voltage	Wattage	Color	Color Temp	CRI (Ra)	Lumen	Beam Angle	Length MOL (in.)
LED F9T8/830/G/NA/24	110-277V	9W	Warm White	3000K	≥80	900 lm	280°	24
LED F9T8/835/G/NA/24	110-277V	9W	White	3500K	≥80	900 lm	280°	24
LED F9T8/840/G/NA/24	110-277V	9W	Neutral White	4000K	≥80	950 lm	280°	24
LED F9T8/850/G/NA/24	110-277V	9W	Cool White	5000K	≥80	1000 lm	280°	24
LED F10T8/830/G/NA/24	110-277V	10W	Warm White	3000K	≥80	1000 lm	280°	24
LED F10T8/835/G/NA/24	110-277V	10W	White	3500K	≥80	1000 lm	280°	24
LED F10T8/840/G/NA/24	110-277V	10W	Neutral White	4000K	≥80	1050 lm	280°	24
LED F10T8/850/G/NA/24	110-277V	10W	Cool White	5000K	≥80	1100 lm	280°	24
LED F14T8/830/G/NA/36	110-277V	14W	Warm White	3000K	≥80	1400 lm	280°	36
LED F14T8/835/G/NA/36	110-277V	14W	White	3500K	≥80	1400 lm	280°	36
LED F14T8/840/G/NA/36	110-277V	14W	Neutral White	4000K	≥80	1450 lm	280°	36
LED F14T8/850/G/NA/36	110-277V	14W	Cool White	5000K	≥80	1500 lm	280°	36
LED F18T8/830/G/NA/48	110-277V	18W	Warm White	3000K	≥80	1800 lm	280°	48
LED F18T8/835/G/NA/48	110-277V	18W	White	3500K	≥80	1800 lm	280°	48
LED F18T8/840/G/NA/48	110-277V	18W	Neutral White	4000K	≥80	1850 lm	280°	48
LED F18T8/850/G/NA/48	110-277V	18W	Cool White	5000K	≥80	1900 lm	280°	48
LED F20T8/830/G/NA/48	110-277V	20W	Warm White	3000K	≥80	2000 lm	280°	48
LED F20T8/835/G/NA/48	110-277V	20W	White	3500K	≥80	2000 lm	280°	48
LED F20T8/840/G/NA/48	110-277V	20W	Neutral White	4000K	≥80	2050 lm	280°	48
LED F20T8/850/G/NA/48	110-277V	20W	Cool White	5000K	≥80	2100 lm	280°	48
LED F22T8/830/G/NA/48	110-277V	22W	Warm White	3000K	≥80	2200 lm	280°	48
LED F22T8/835/G/NA/48	110-277V	22W	White	3500K	≥80	2200 lm	280°	48
LED F22T8/840/G/NA/48	110-277V	22W	Neutral White	4000K	≥80	2250 lm	280°	48
LED F22T8/850/G/NA/48	110-277V	22W	Cool White	5000K	≥80	2300 lm	280°	48
LED F24T8/830/G/NA/60	110-277V	24W	Warm White	3000K	≥80	2400 lm	280°	60
LED F24T8/835/G/NA/60	110-277V	24W	White	3500K	≥80	2400 lm	280°	60
LED F24T8/840/G/NA/60	110-277V	24W	Neutral White	4000K	≥80	2450 lm	280°	60
LED F24T8/850/G/NA/60	110-277V	24W	Cool White	5000K	≥80	2500 lm	280°	60