




# *Del* **TORO**




**CUSTOM LED, ARCHITECTURAL, HOSPITALITY, AND DECORATIVE LIGHTING CATALOG**

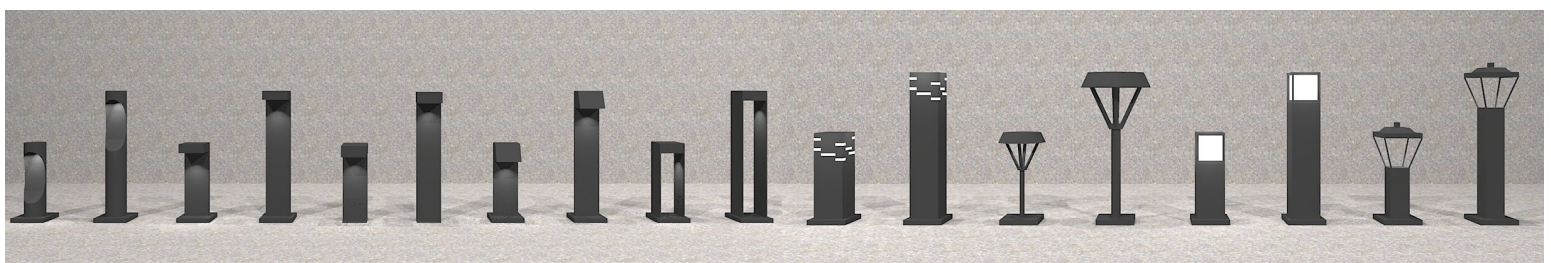




# LED & Production Information

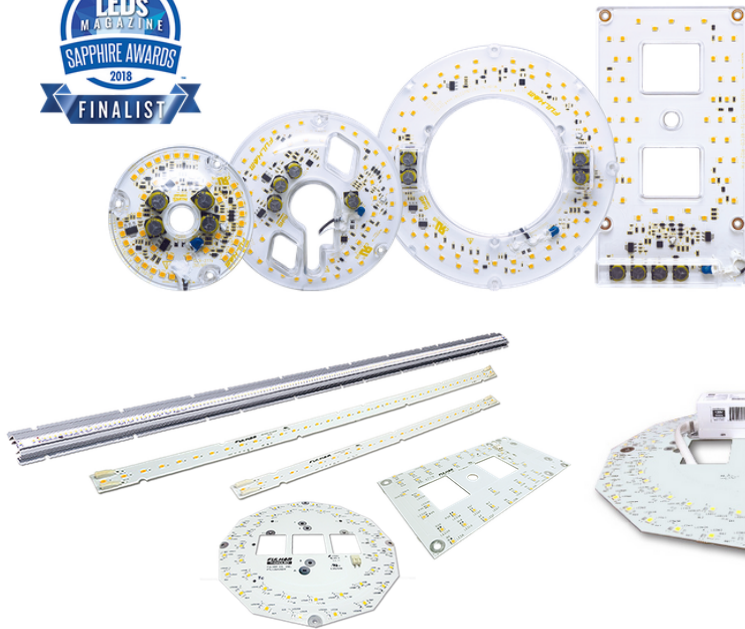

We proudly offer Fulham and Cree LED modules, retrofit kits, and custom configurations to fulfill all of your specification needs. High CRI, lumen output, and Energy star rated components are available throughout our entire catalog.



## Custom Laser Cut Design Panel



We fabricate all types of decorative fixtures from artwork to furniture. Our factory includes a metal fabrication shop, two large conveyor powder coating systems, and laser cutting. All products are fully customizable, with a large array of design, finish, and diffuser options. Del Toro can be your one stop shop for any and all your decorative fixture design

## Custom Drum Planter Design



## Ordering Information: Fixture Number + Dimensions + Lamping + Finish + Options or Modifications


Standard Specifications		Finishes		Diffusers		Diffusers	
<b>Material</b>	Brass, Steel, Aluminum	<b>PB</b>	Polished Brass	<b>WA</b>	White Acrylic	<b>LS</b>	Linen Shade
<b>Diffuser</b>	White Acrylic	<b>PC</b>	Polished Chrome	<b>WPC</b>	White Polycarbonate	<b>FS</b>	Felt Shade
<b>Driver</b>	Integrated LED	<b>PU</b>	Polished Copper	<b>FAA</b>	Faux Alabaster	<b>CCS</b>	Custom Color Shade
<b>Voltage</b>	120-277V	<b>VP</b>	Verdigris Patina	<b>SBL</b>	Sandblasted Acrylic	<b>WOG</b>	White Opal Glass
<b>Finish</b>	Powder Coat	<b>WB</b>	Weathered Brass	<b>CA</b>	Clear Acrylic	<b>CG</b>	Clear Glass
<b>Label</b>	UL Listed	<b>SB</b>	Satin Brass	<b>FA</b>	Frosted Acrylic	<b>SG</b>	Seeded Glass
		<b>SC</b>	Satin Chrome	<b>SA</b>	Stained Acrylic	<b>FG</b>	Frosted Glass
		<b>SU</b>	Satin Copper	<b>CCA</b>	Custom Color Acrylic	<b>TG</b>	Tinted Glass
		<b>CC</b>	Custom Color	<b>DBL</b>	Double Bowl	<b>AM</b>	Acoustic Material





# Decorative Housing & Double Dome Innovation Designs

## Chocolate Linen Laminate

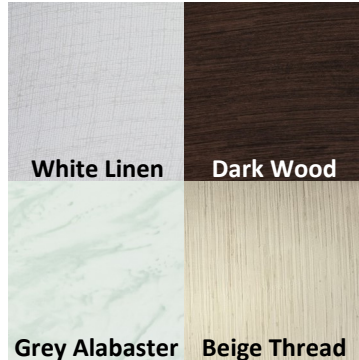


We proudly offer custom acrylic, polycarbonate, and acoustic material configurations to fulfill all of your decorative needs. Laminated acrylic and acoustic materials allow for a large range of designs without sacrificing structural integrity and luxurious appearance. Get the look of fabric with the strength and cleanliness of acrylic.



Acoustic material housing can be fabricated for decorative and lighting purposes. Contact us for viable design options and custom manufacturing capabilities.

Please Contact Us for Laminated and Acoustic Material Color Availability


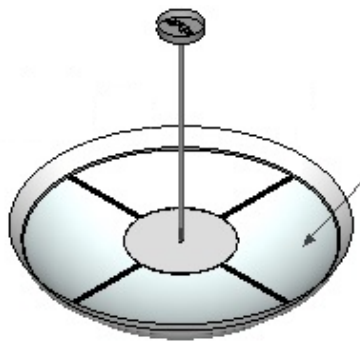


## Double Dome Diffuser Innovation


Our Double Dome construction is great for hard to reach, and minimal maintenance settings. The decorative acrylic dome comes with an interior clear dome that reduces shadows cast by dust and debris landing in the housing. Perfect for hospitality settings with high traffic and ceilings.

## Ordering Information: Fixture Number + Dimensions + Lamping + Finish + Options or Modifications

Standard Specifications		Finishes		Diffusers		Diffusers	
<b>Material</b>	Brass, Steel, Aluminum	<b>PB</b>	Polished Brass	<b>WA</b>	White Acrylic	<b>LS</b>	Linen Shade
<b>Diffuser</b>	White Acrylic	<b>PC</b>	Polished Chrome	<b>WPC</b>	White Polycarbonate	<b>FS</b>	Felt Shade
<b>Driver</b>	Integrated LED	<b>PU</b>	Polished Copper	<b>FAA</b>	Faux Alabaster	<b>CCS</b>	Custom Color Shade
<b>Voltage</b>	120-277V	<b>VP</b>	Verdigris Patina	<b>SBL</b>	Sandblasted Acrylic	<b>WOG</b>	White Opal Glass
<b>Finish</b>	Powder Coat	<b>WB</b>	Weathered Brass	<b>CA</b>	Clear Acrylic	<b>CG</b>	Clear Glass
<b>Label</b>	UL Listed	<b>SB</b>	Satin Brass	<b>FA</b>	Frosted Acrylic	<b>SG</b>	Seeded Glass
		<b>SC</b>	Satin Chrome	<b>SA</b>	Stained Acrylic	<b>FG</b>	Frosted Glass
		<b>SU</b>	Satin Copper	<b>CCA</b>	Custom Color Acrylic	<b>TG</b>	Tinted Glass
		<b>CC</b>	Custom Color	<b>DBL</b>	Double Bowl	<b>AM</b>	Acoustic Material



### 520P—Thin Tube Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
1.5"	14"	36"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
1.5"	24"	48"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
1.5"	36"	60"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 305P—Bar Trio Pendant

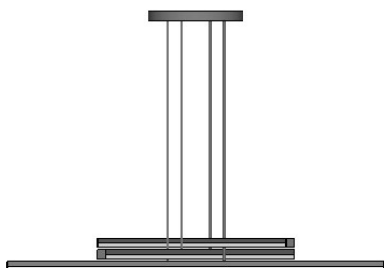


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	4"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 306P—Bar Quintet Pendant

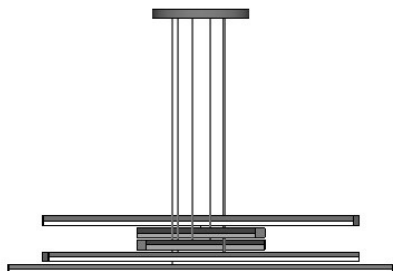

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
48"	9"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers


<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade







#### 000P—Round Blade Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 015P—Rounded Cross Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
30"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
36"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 030P—Hexagon Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	3"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	3"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
42"	3"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes


<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers


<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>AM</b>	Acoustic Material

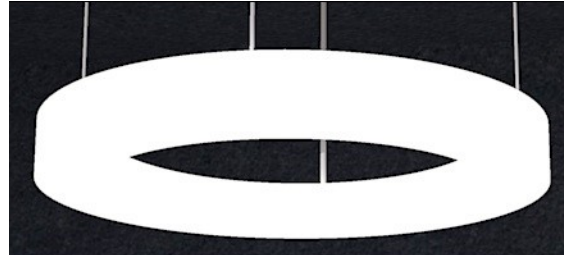

### 038P—Ring Suspension Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	2"	36"	Up to 2,500	Up to 50W	2700K-5000K	0-10V
36"	2"	36"	Up to 3,000	Up to 60W	2700K-5000K	0-10V
48"	2"	36"	Up to 5,000	Up to 100W	2700K-5000K	0-10V


#### Notes:

Stem/Canopy available in a variety of styles .

Ring quantity available in multiple configurations

**\*Fully Customizable\***

### 050P—Acrylic Ring Pendant

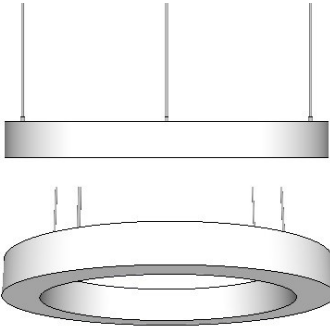


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
48"	5"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 530P—Cyclone Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	27"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	33"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	39"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color


#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl


#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>AM</b>	Acoustic Material





#### 155W—Blade Insert Wall Sconce



Width	Depth	Height	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	12"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
4"	4"	18"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
4"	4"	24"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV

#### Notes:

Mount available in a variety of styles .

**\*Fully Customizable\***

#### 630W—Strapped Wall Sconce




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	3.5"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4"	3.5"	18"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4"	3.5"	24"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Mount available in a variety of styles .

**\*Fully Customizable\***

#### 635W—Angled Infinity Wall Sconce



Width	Depth	Height	Lumen Output	Wattage	Color Temp	Dimming
4.5"	3"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4.5"	3"	18"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4.5"	3"	24"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Mount available in a variety of styles .

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>BG</b>	Beveled Glass





#### 500P—Cylinder Downlit Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	12"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
6"	18"	36"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
8"	24"	36"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 505W—Puck Wall Arm Mount




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	5"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
6"	4"	7"	Up to 3,360	Up to 30W	2700K-5000K	TRIAC or ELV
8"	4"	9"	Up to 5,080	Up to 46W	2700K-5000K	TRIAC or ELV

#### Notes:

Arm Mount available in a variety of styles .

**\*Fully Customizable\***

#### 515W—Framed Indirect Arm Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
4"	12"	5"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
6"	18"	7"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
8"	24"	9"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

#### Notes:

Arm Mount available in a variety of styles.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color



#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>BG</b>	Beveled Glass





### 205P—Framed Ring Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
12"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
18"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

#### Notes:

Lower wattage options available for energy efficiency projects.

**\*Fully Customizable\***

### 230P—Giant Shade Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	10"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
36"	16"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
44"	24"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC


#### Notes:

Lamping available in a variety of styles .

Fabric Shade Available in a variety of colors.

**\*Fully Customizable\***

### 208P—Star 6 Point Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
30"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

#### Notes:

Lower wattage options available for energy efficiency projects.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes




<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>AM</b>	Acoustic Material

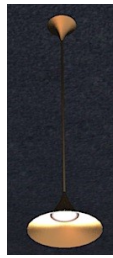

**560P—Horn Down-lit Pendant**



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
12"	12"	36"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
18"	18"	36"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

**Notes:**

Lamping available in a variety of styles .

**\*Fully Customizable\***

**715P—Rope Hung Globe Pendant**



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	10"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
36"	16"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
44"	24"	48"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb


**Notes:**

Lower wattage options available for energy efficiency projects.

Fabric or metal Shade Available in a variety of colors.

**\*Fully Customizable\***

**240P—Fan Shade Pendant**

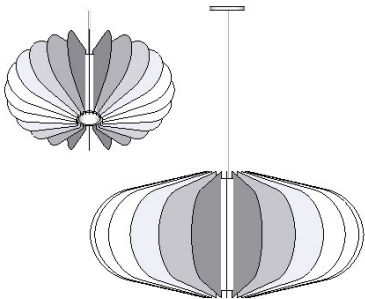

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
30"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

**Notes:**

Fabric, Acrylic, or Metal Shade Available in a variety of Styles.

**\*Fully Customizable\***

**Standard Specifications**

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

**Finishes**

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

**Diffusers**

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl


**Diffusers**

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>AM</b>	Acoustic Material





### 200P—Framed Box Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
12"	19"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb
16"	24"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb
20"	20"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb

#### Notes:

Lower wattage options available for energy efficiency projects.

Fabric or Metal Housing Available in a variety of styles.

**\*Fully Customizable\***

### 221P—Framed Column Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
10"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	28"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	36"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC


#### Notes:

Lamping available in a variety of styles .

Fabric or Metal Housing Available in a variety of styles.

**\*Fully Customizable\***

### 221W—Fancy Framed Arm Mount

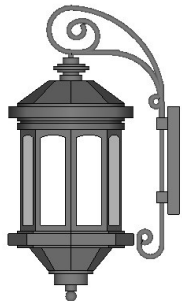

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
10"	14"	26"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	16"	30"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	20"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Fabric, Acrylic, or Metal Shade Available in a variety of Styles.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes


<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers


<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>BG</b>	Beveled Glass

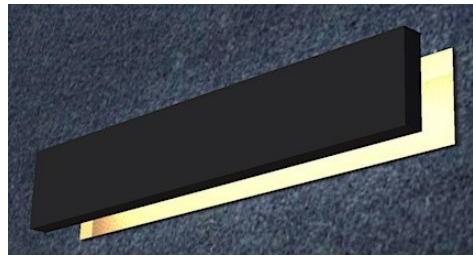

### 106P—Cascading Tile Pendant




Width	Depth	OAH	Lumens/Tile	Wattage/Tile	Color Temp	Dimming
4"	4"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
8"	4"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
16"	16"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 300P—Plank Pendant

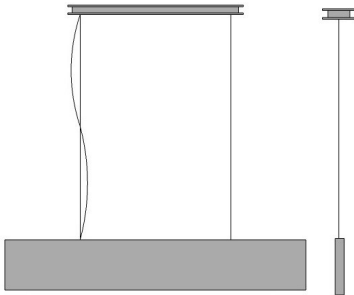


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	8"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 300W—Plank Wall Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	8"	4"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Wall Mount available in a variety of styles .

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes



<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>AM</b>	Acoustic Material
<b>DBL</b>	Double Bowl







#### 700P—Globe Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	18"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	24"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
30"	30"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 715W—Ceiling Mount

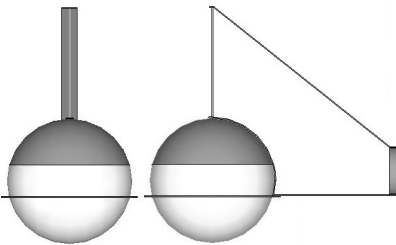


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
6"	12"	12"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
8"	16"	16"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
10"	20"	20"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

#### Notes:

Wall Mount available in a variety of styles .

**\*Fully Customizable\***

#### 412W—Wall or Ceiling Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
10"	10"	7.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
14"	14"	10"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
18"	18"	21"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Accent bars available in a variety of styles.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color


#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl


#### Diffusers

<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass



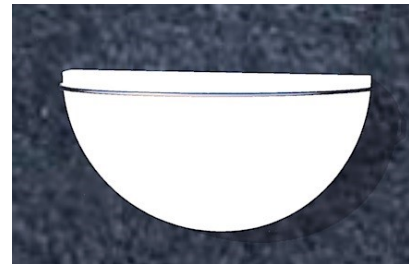

**400P—Bowl Pendant**




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	10"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

**Notes:**

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

**400C—Ceiling Mount**

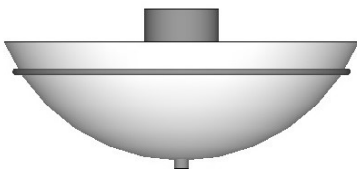

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	24"	8"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	30"	9"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	36"	10"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

**Notes:**

Standoff available in a variety of styles .

**\*Fully Customizable\***

**400W—Wall Mount**



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
12.5"	6"	4.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
12.5"	6"	6.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
16.5"	8"	8.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

**Notes:**

Top Lens also available.

**\*Fully Customizable\***

**Standard Specifications**

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

**Finishes**

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

**Diffusers**

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl


**Diffusers**

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>AM</b>	Acoustic Material





#### 810P—Framed Cone Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
24"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 810C—Ceiling Mount

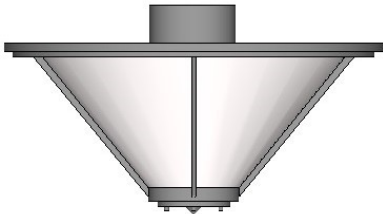


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	12"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
24"	9"	12"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	12"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Standoff available in a variety of styles .

**\*Fully Customizable\***

#### 810W—Wall Mount

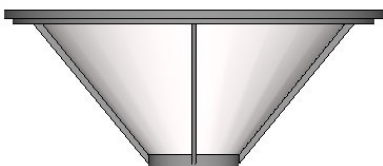

Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	10.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	9"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
30"	9"	15"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Top Lens also available.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color



#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl


#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>AM</b>	Acoustic Material



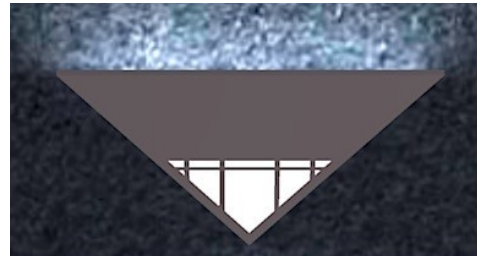

### 910P—Framed Pyramid Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	6"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
25"	7.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 910C—Ceiling Mount




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	6"	9"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
25"	7.5"	10.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	12"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Standoff available in a variety of styles .

**\*Fully Customizable\***

### 910W—Wall Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
12"	6"	4"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
18"	8"	5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	12"	6"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Top Lens also available.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes


<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>AM</b>	Acoustic Material



### 510P—Acrylic Cylinder Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	24"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

### 550W—Shield Wall Sconce




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
10"	12"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	14"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
14"	16"	5"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Top & Bottom Lens also available.

**\*Fully Customizable\***

### 500W—Half Cylinder Wall Sconce



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
7"	16"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
7"	20"	5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
9"	24"	5"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Top & Bottom Lens also available.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed


#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color


#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>AM</b>	Acoustic Material
<b>DBL</b>	Double Bowl





#### 860P—Vapor Glass Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
10.5"	10"	24"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
10.5"	10"	36"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
10.5"	10"	48"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem/Canopy available in a variety of styles .

**\*Fully Customizable\***

#### 750C—Shade Surface Mount




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
8"	6"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Diffusers/Mounts available in a variety of styles.

**\*Fully Customizable\***

#### 016P—TriArm Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	3.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	3.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
46"	3.5"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Stem and Cable options also available.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color


#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>AM</b>	Acoustic Material





### 220C—Hexagon Flush Mount




Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	16"	4"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Multiple Lens options also available.

**\*Fully Customizable\***

### 905C—Pyramid Flush Mount

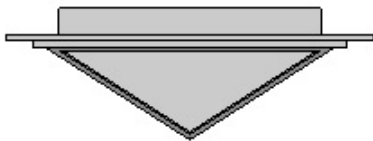


Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	18"	6"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Multiple Lens options also available.

**\*Fully Customizable\***

### 211C—Accent Box Flush Mount



Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	18"	6"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

#### Notes:

Multiple Lens options also available.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes


<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers

<b>LS</b>	Linen Shade
<b>FS</b>	Felt Shade
<b>CCS</b>	Custom Color Shade
<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>AM</b>	Acoustic Material



#### 605L—Window Bar Bollard




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
6"	6"	42"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
8"	8"	48"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

#### Notes:

Mounting available in a variety of styles.

**\*Fully Customizable\***

#### 111L—Hammer Pathway




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	8"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	10"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	12"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Mounting available in a variety of styles.

**\*Fully Customizable\***

#### 610L—Infinity Pathway



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	18"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	8"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	8"	30"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

#### Notes:

Mounting available in a variety of styles.

**\*Fully Customizable\***

#### Standard Specifications

<b>Material</b>	Brass, Steel, Aluminum
<b>Diffuser</b>	White Acrylic
<b>Driver</b>	Integrated LED
<b>Voltage</b>	120-277V
<b>Finish</b>	Powder Coat
<b>Label</b>	UL Listed

#### Finishes

<b>PB</b>	Polished Brass
<b>PC</b>	Polished Chrome
<b>PU</b>	Polished Copper
<b>VP</b>	Verdigris Patina
<b>WB</b>	Weathered Brass
<b>SB</b>	Satin Brass
<b>SC</b>	Satin Chrome
<b>SU</b>	Satin Copper
<b>CC</b>	Custom Color

#### Diffusers

<b>WA</b>	White Acrylic
<b>WPC</b>	White Polycarbonate
<b>FAA</b>	Faux Alabaster
<b>SBL</b>	Sandblasted Acrylic
<b>CA</b>	Clear Acrylic
<b>FA</b>	Frosted Acrylic
<b>SA</b>	Stained Acrylic
<b>CCA</b>	Custom Color Acrylic
<b>DBL</b>	Double Bowl

#### Diffusers


<b>WOG</b>	White Opal Glass
<b>CG</b>	Clear Glass
<b>SG</b>	Seeded Glass
<b>FG</b>	Frosted Glass
<b>TG</b>	Tinted Glass
<b>BG</b>	Beveled Glass






# LED Sample Diagram Layouts

## Rounded Cross Pendants LED Layout

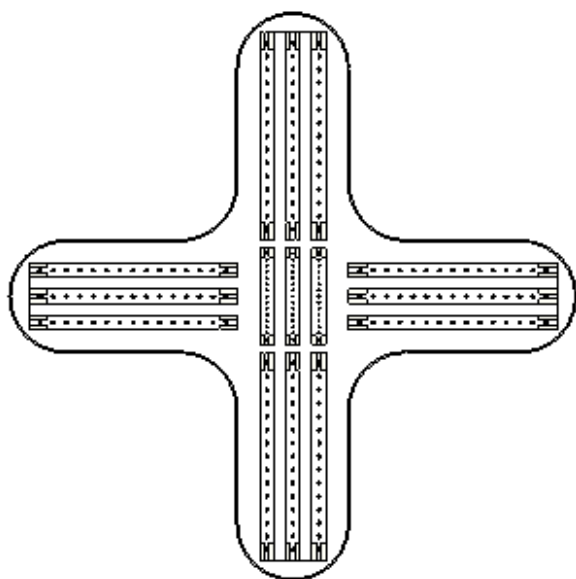

## We take pride in quality craftsmanship.

Focusing on light leakage prevention and hot spot reduction is a large part of manufacturing the best fixtures possible. Our goal is to create picturesque designs for every project.

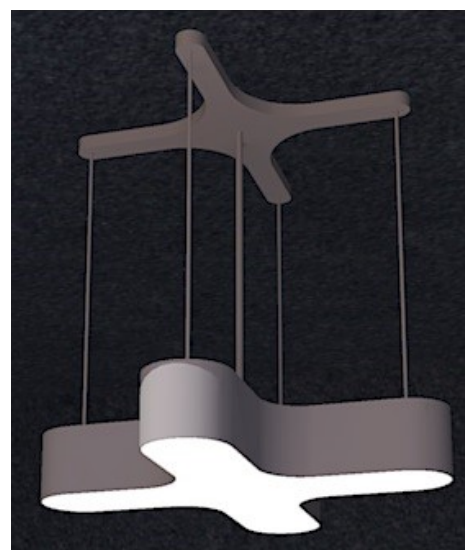

Please contact us with any questions about custom LED layout and design.

We have a large variety of LED package configurations available.

Kit#	Lumen Output	Wattage	Dimming
LEDAC1	1,065	10W	TRIAC/ELV
LEDAC2	1,680	15W	TRIAC/ELV
LEDAC3	1,724	15W	TRIAC/ELV
LEDAC4	2,540	23W	TRIAC/ELV
LEDAC5	3,685	34W	TRIAC/ELV
LEDRD7	1,450	13W	0-10V or TRIAC
LEDRD9	2,900	25W	0-10V or TRIAC
LEDRD10	8,700	65W	0-10V or DALI
LEDHRD	1,450	13W	0-10V or TRIAC
LEDREC	1,450	13W	0-10V or TRIAC


Package#	Lumen Output	Wattage	Dimming
LED1	1,230	8.4W	0-10V or TRIAC
LED2	2,460	16.8W	0-10V or TRIAC
LED3	3,225	21.3W	0-10V
LED4	4,920	33.6W	0-10V
LED6	7,380	50.4W	0-10V
LED8	9,840	67.2W	0-10V
LED10	13,520	89W	0-10V
LED12	14,760	100.8W	0-10V
LED22	34,800	224.7W	0-10V
LED44	35,840	217.4W	0-10V





## LED Sample Diagram Layouts

Ring Pendants LED Layout

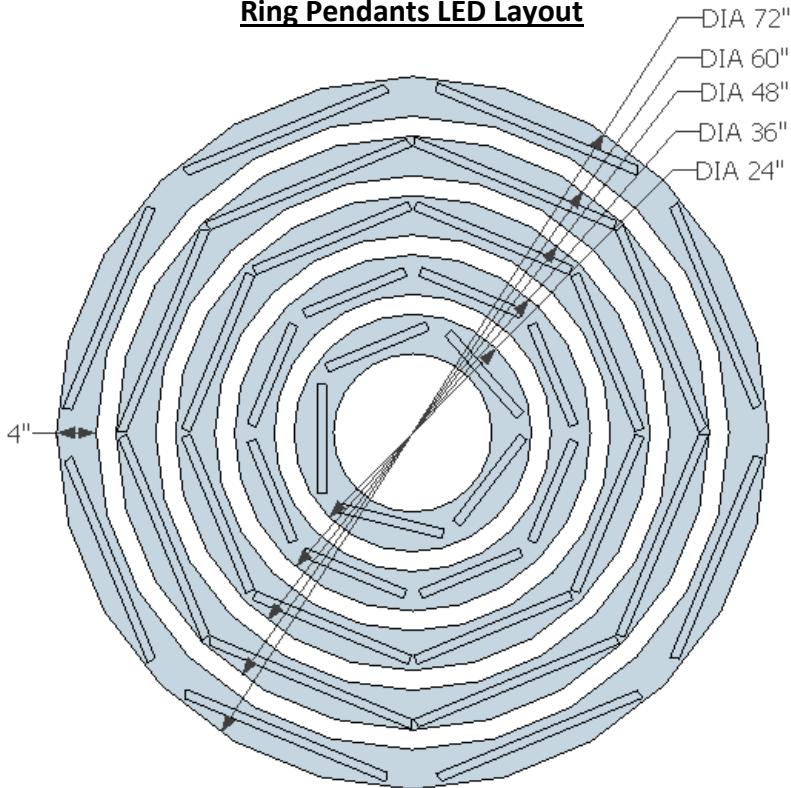


We take pride in quality craftsmanship.

Focusing on light leakage prevention and hot spot reduction is a large part of manufacturing the best fixtures possible. Our goal is to create picturesque designs for every project.



Please contact us with any questions about custom LED layout and design.

We have a large variety of LED configurations available.

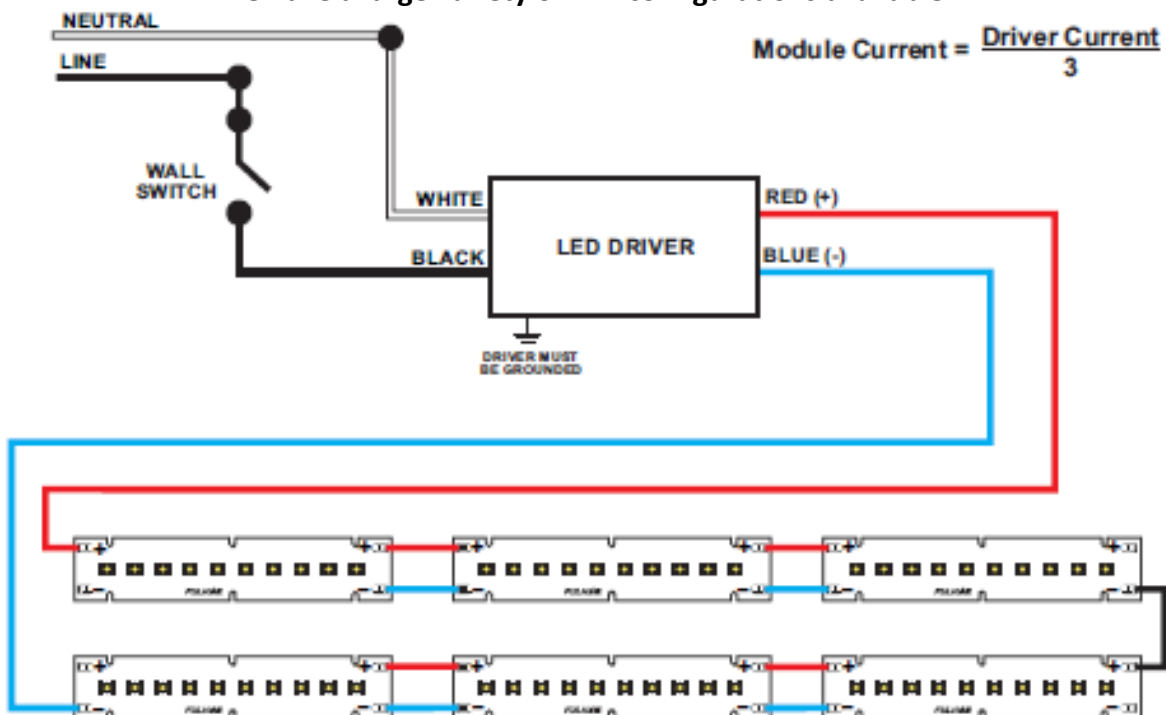



# Terms & Conditions of Sale

**TERMS OF SALE:** 30 days net, F.O.B. Del Toro Lighting Alhambra California Lamps are not included, unless otherwise noted. Minimum orders of \$100. All delinquent accounts will be charged 1.5 percent per month, 18 percent per year.

**ORDERS:** All purchase orders are subject to acknowledgment and acceptance by Del Toro Lighting. We will rely on customers' purchase orders being complete and accurate in every detail, authorized and endorsed. This original authorization shall then be forwarded to Del Toro Lighting for our records. All orders must be placed on, or confirmed by the customer's order form, including all details to which the order is subject by customer's request. However, any statements or printing on the customer's orders are accepted subject to our published terms and conditions unless we agree to a specific deviation in writing from Del Toro Lighting. All orders for special or custom-made equipment are not subject to cancellation once received by Del Toro Lighting. Upon the acceptance of any order, we will not be responsible for conforming to any plans and specifications unless they accompany their original order and are accepted as such. All orders taken by the sales representative shall be subject to acceptance by Del Toro Lighting. Specifications either contained in Del Toro's catalog, promotional literature or special application drawings are subject to change without notice or liability to Del Toro Lighting. Del Toro Lighting reserves the right at all times to reject any order, whether because of the unsatisfactory credit rating of the customer or for any reason whatsoever.

**LIABILITY:** Shipment date noted on our acknowledgment, if any, is Del Toro Lighting's best approximation of probable shipment date, and shall not be deemed to represent a fixed or guaranteed shipment date. Del Toro Lighting will not be held liable for late delivery and or inability to perform thereunder caused by any contingency beyond its control, including, without limitation, strikes, riots, wars, accidents, fires, floods, disasters, inability to obtain materials essential to the manufacture of the products covered hereby, or governmental or other limitation or restrictions on material, labor, manufacturing, delivery or shipping.

**RETURNS:** All merchandise returned without our written consent will not be accepted. All returned goods are subject to prior approval and must be accompanied by a returned goods authorization number. (RGA) obtained only through the local manufacturer's representative and issued by Del Toro Lighting. Return requests must be made within 60 days of the date of invoice and returned within 30 days of an issuance of an RGA. Only an estimate of the credit can be given upon the requesting of a return. All returned merchandise would be subject to inspection to arrive at a credit value. Special, modified, or discontinued fixtures will not be accepted for a return.

**CANCELLATIONS OF ORDERS:** All cancellations must be made in writing. Released standard product orders cancelled within four weeks of acknowledged shipment date carry up to a fifty percent cancellation charge. No custom or modifications orders may be cancelled after release of order.

**WARRANTIES:** Del Toro Lighting warrants that the products manufactured by it shall be free from defects in material and workmanship for one (1) year from the date of shipment. On components furnished by Del Toro Lighting, but manufactured by others, a written warranty of the manufacturer, if any, will be assigned to the buyer. Del Toro Lighting does not adopt, and does not warrant, or represent, any such component parts or the enforceability of such third party type warranties. Del Toro Lighting's sole obligation under this warranty shall be, at its option, to repair and replace its defective product. There are no other expressed warranties, including any warranty of merchantability or fitness for purpose. Del Toro Lighting shall not be liable for consequential damages or costs for removal and reinstallation of its products. Buyer shall pay for all shipping charges to and from Del Toro Lighting's plant in Alhambra, California for the return and repair and replacement of the product. This warranty shall not apply to defects or damage caused by shipping, improper installation, improper use or abuse of the product.

**AUXILIARY EQUIPMENT:** Ballasts or transformers, furnished as components with our products carry the warranties of the manufacturer of that equipment. Del Toro Lighting's warranty does not extend to such components. Defective ballasts or transformers under warranty are to be delivered by the user to the manufacturer's designated service distributor for replacement in accordance with their standard terms.

The liability of Del Toro Lighting or any sales representative or distributor on all claims of any kind for any loss or damage arising out of or resulting from or concerning any aspect of this limited warranty, or from the products or services furnished, shall not exceed the price of the specific product which gives rise to the claims.

**NETTERMS:** NET 30 days from date of invoice.

**FREIGHT:** Shipping is FOB our plant. No minimum order charge. Full freight is allowed on orders over \$1,500.00 if invoice paid 30 days.

**DROP SHIP:** ADD \$10.00 for UPS or \$45.00 for truck drop ship. Charges are not deductible. Call before delivery for truck is \$45.00 and charges are not deductible.

**RETURNS:** No returns are allowed without written authorization. Restocking charge is 25%.

**PRICES:** Prices and specifications are subject to change without written notice.

**WARRANTY:** Del Toro Lighting warrants to the purchaser for resale only that its products are free from defects in material and workmanship. Del Toro Lighting obligation is expressly limited to repair or replacement at its option without charge at the company's factory within a period of one year from the date of shipment. Del Toro Lighting is not responsible for any installation charges or chargeback's for installation.



# Custom Lighting, Furniture, & Decorative Fixtures



Coast to Coast Metal Finishing DBA Del Toro Lighting has been providing high quality decorative fixtures for over 40 years.

Lighting, furniture, and decorative metal fixtures are all manufactured in Southern California. Feel free to contact us for any of your manufacturing needs.