



ENGINEERED TO PERFORM. BUILT TO LAST.

Reliable lift systems for independent repair shops, car dealerships, bodyshops, home enthusiasts, and heavy-duty truck facilities.



I-10

LIGHT DUTY TWO POST LIFT

10,000 lbs. Capacity

FEATURES:

- Symmetrical column design
- Spot-Rite™ 3-stage front arm design
 - spot vehicles asymmetrically or symmetrically
- Top mounted Direct-Pull lifting technology
- Cylinder rod concealed inside carriage
- Adjustable width options
- Single point lock release
- Powder coated finish
- Includes adapter storage bracket
- ALI Certified




FWD I10N400MBL

INCLUDES LOW-PROFILE THREADED ADAPTERS AND (4 each) ADAPTER EXTENSIONS AT 3.5" and 5"



Spot-Rite™ 3-Stage Front Arm Design

accommodates vehicle spotting both symmetrically and asymmetrically. Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

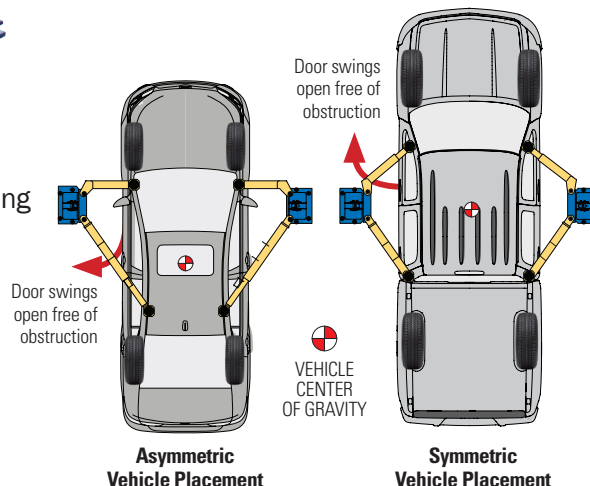

996 Industrial Drive
Madison, IN 47250

Phone: 800.423.1722
Fax: 812.273.7329



www.forwardlift.com



Lit# Forward i10 CUTSHEET.2021.06 ©2021 Vehicle Service Group™ All rights reserved.

Unless otherwise indicated, Forward Lift, Vehicle Service Group™, Dover and all other trademarks are property of Dover Corporation and its affiliates. Printed in the U.S.A.

SPECIFICATIONS I10N400MBL/RD*

Capacity	10,000 lbs. (4535kg)
Maximum rise	76 - 1/4" (1937mm) w/5" extension
Overall Height	143" (3632mm)
Overall Width	131" or optional 137" (3327mm/4380mm)
Drive through clearance	99" (2515mm) or optional 105" (2667mm)
Overhead switch height	137-5/8" (3496mm)
Front reach (Min/Max)	23" / 44-3/8" (584mm/1127mm)
Rear reach (Min/Max)	36" / 58" (914mm/1473mm)
Min/Max adapter height	3-3/4" (95mm) w/o adapter extension 8-3/4" (222mm) w/ 5" adapter extension
Width inside column	109" or optional 115" (2769mm/2921mm)
Voltage/ Amps	208V/230V, 17 amps
Motor/Phase	1ph/2HP/60Hz
Ceiling height required	144" (3658mm)

*Lifts available in blue and red
Specifications subject to change without notice or liability.