



Features

- 40W / 72W LED Panel
- Frosted PC diffuser provide uniform distribution
- Comfort glare-free light
- Color Rendering Index: ≥ 80
- Dimmable as option

Materials / Finish

- Body: Sheet steel housing with white finish
- Reflector: Frosted aluminium
- Diffuser: Frosted PC


Installation / Mounting

- Quick installation with mounting bracket
- Suitable for recessed mount
- Integral gear unit allows quick and easy installation


Standards

- Designed and manufactured to comply with international standard EN60598
- Class II Electrical
- IP 20
- UL
- * DLC certified


Dimming Options :



ND5021

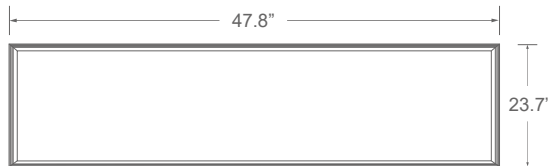

ND5022 / ND5023



ND5020



Model	Wattage	Color Temp	Beam Angle	CRI (Ra)	Lumen
ND5020-40W/830	40W	3000K	150°	≥ 80	3400 lm
ND5020-40W/840	40W	4000K	150°	≥ 80	3500 lm
ND5020-40W/850	40W	5000K	150°	≥ 80	3600 lm
* ND5021-40W/830	40W	3000K	150°	≥ 80	3400 lm
* ND5021-40W/840	40W	4000K	150°	≥ 80	3500 lm
* ND5021-40W/850	40W	5000K	150°	≥ 80	3600 lm
ND5022-40W/830	40W	3000K	150°	≥ 80	3400 lm
ND5022-40W/840	40W	4000K	150°	≥ 80	3500 lm
ND5022-40W/850	40W	5000K	150°	≥ 80	3600 lm
* ND5023-72W/830	72W	3000K	150°	≥ 80	6200 lm
* ND5023-72W/840	72W	4000K	150°	≥ 80	6300 lm
* ND5023-72W/850	72W	5000K	150°	≥ 80	6400 lm