


Infrared Thermometers

Stationary




measuring
•
monitoring
•
analyzing

TIR-S / TIR-F

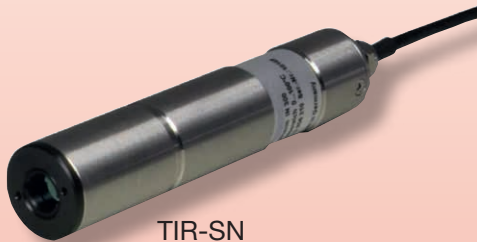

TIR-SN

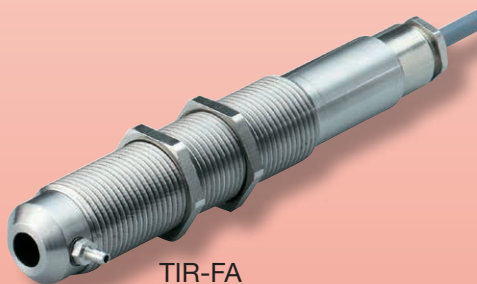

TIR-FA



TIR-FS

- Measuring Ranges From:
-20...300 °C to 1100...2500 °C
(-4...572 °F to 2012...4532 °F)
- Accuracy:
0.8% of Reading +1 °C... 1.5% of
Temperature Range
- Output: 4-20 mA, Thermoelectric Voltage
Type J, K 10 mV/°C
- Adjustable Emissivity
- Non-contact Temperature Measurement
- Easy to Operate



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECH REPUBLIC, EGYPT, FRANCE, GERMANY, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, UNITED KINGDOM, USA, VIETNAM

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205
☎ Main Office:
1.800.998.1020
1.412.788.4890
✉ info@koboldusa.com
www.koboldusa.com

Description

The TIR-FA is a stationary infrared sensor for non-contact temperature measurement of non-metallic surfaces and painted, coated, or anodized metals. The small housing enables installation in compact production machines and the solid and rugged design guarantees reliability even in rough industrial environments. With the built-in air purge, the lens can be protected from dust and moisture contamination. These features allow it to be adapted to various measuring tasks. It is an analog measuring device that provides 3 different outputs.

Special Features


- Built-in Air Purge Unit to Keep the Lens Clean in Dusty Environments
- Easy Installation and Connection
- Stainless Steel Housing with PG 11 Thread for Easy Mounting
- Very Small Housing Dimensions, Suited for Use in Confined Spaces
- Up to 70 °C (158 °F) Operating Temperature without Cooling

Typical Applications

- Plastics
- Glass
- Liquids
- Textile
- Wood
- Food
- Asphalt
- Varnish
- Painted Metals
- Rubber
- Ceramic
- Coated Metals
- Paint
- Paper
- Anodized Metals

Optics

The optics are fixed to a distance of 50 mm. At this distance, it achieves the smallest spot size in relation to the measuring distance. The spot size will be enlarged in any other distance (shorter or longer). Please note that the measuring object must be at least as big as the spot size.

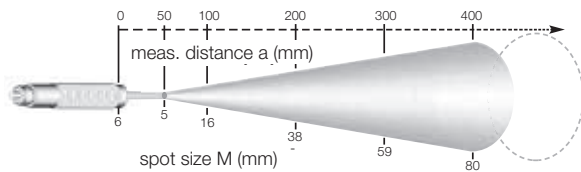


Technical Details

- Power Supply:** 18...30 V_{DC}
- Output:** 10 mV/°C or thermocouple model J or K
- Load:** Min. 50 kΩ
- Emissivity ε:** 95% (fixed)
- Exposure Time t₉₀:** 300 ms
- Uncertainty:** 1.5% of temperature range or 2.5 °C*
- Repeatability:** 1% of reading or 1 °C*
- Noise (NETD, σ =1):** <0.2 °C
- Ambient Temp.:** 0...70 °C (32...158 °F)
- Storage Temp.:** -20...70 °C (-4...158 °F)
- Relative Humidity:** No condensing conditions
- Housing:** Stainless steel
- Weight:** 150 g (0.33 lb.)
- Mounting Position:** Any
- Connection Cable:** 1 m (3.3 feet)
- Air Purge Unit:** For connecting hose with 2 mm inner diameter
- Protection:** IP65 (DIN 40 050)
- CE Label:** According to EU directives about electromagnetic immunity

* The larger value is valid

Dimensions (mm)

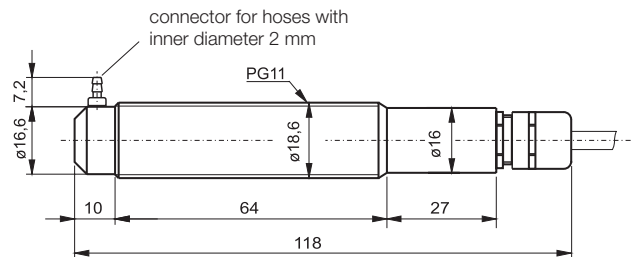

Order Details (Example: TIR-FA V12)


Measuring Range	Output		
	10 mV/°C	Model J	Model K
0...120 °C (32...248 °F)	TIR-FA V12	TIR-FA J12	TIR-FA K12
0...300 °C (32...572 °F)	TIR-FA V30	TIR-FA J30	TIR-FA K30
100...500 °C (212...932 °F)	TIR-FA V50	TIR-FA J50	TIR-FA K50

Accessories for Stationary Infrared Measuring Instruments (TIR-FA)


Model	Description
TIR-ZA100	Mounting Support, Fixed
TIR-ZA150	90° Mirror
TIR-ZA200	Mounting Support, Adjustable
TIR-ZA900	Cooling Housing

Dimensions Accessories (mm)

TIR-ZA100


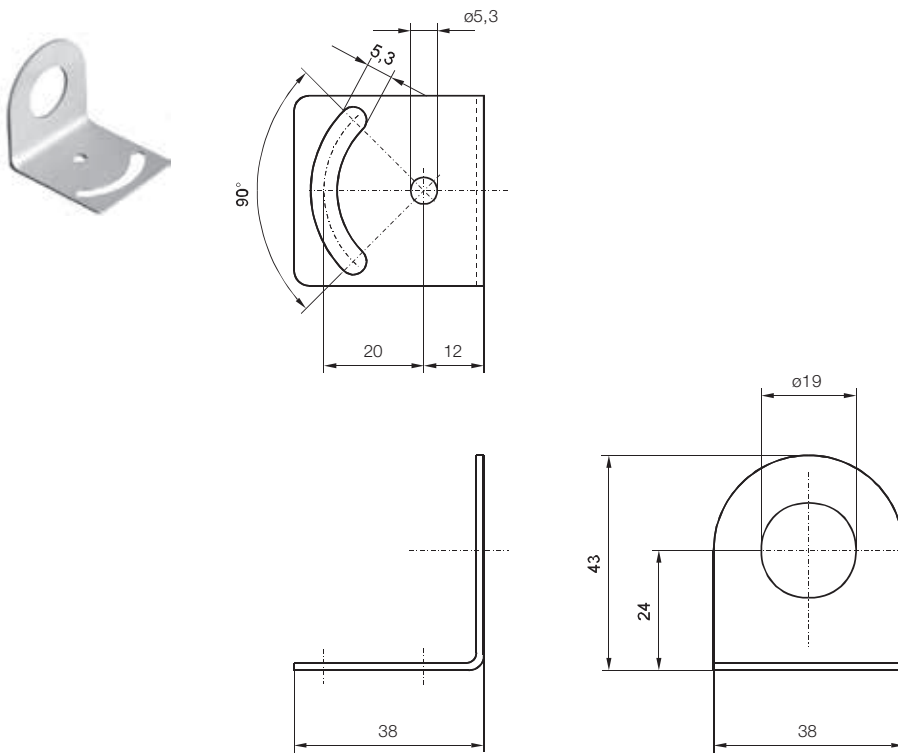


TIR-ZA150

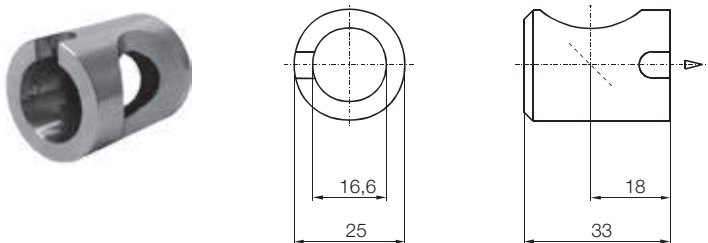


Dimensions Accessories (mm)


TIR-ZA200

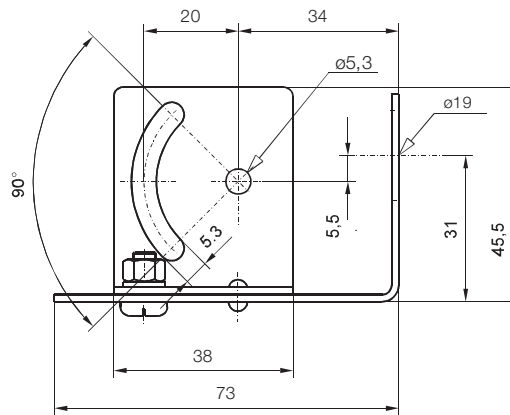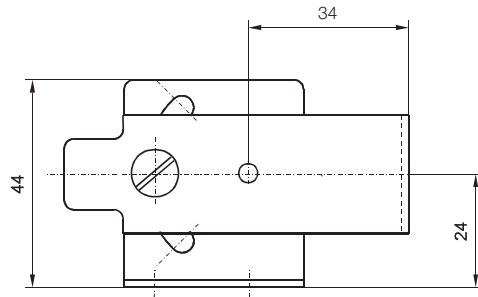

TIR-ZA950

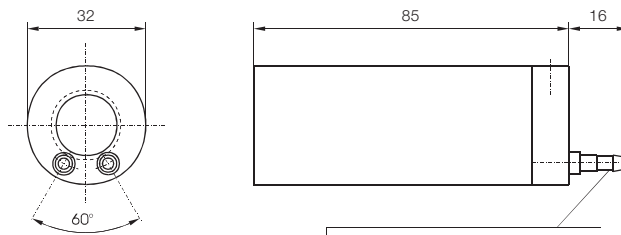

for 4 mm inner diameter hoses, PP, PU

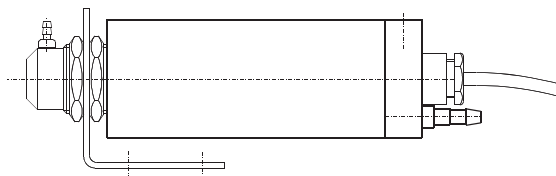

Description

The TIR-SN is a stationary pyrometer for non-contact temperature measurement of non-metallic surfaces and painted, coated, or anodized metals. The very small housing enables integration into compact production machines. The 2-wire technique enables very easy electrical connection. The solid and rugged design guarantees high operational safety even in rough industrial environments.




Special Features

- Very Small Housing Dimensions for Easy Installation, Suitable for Use in Confined Spaces
- 2-wire Technique for Current Supply and Temperature Measurement at the Same Time
- Stainless Steel Housing
- Easy Electrical and Mechanical Installation
- Suitable for the Food Industry
- Ambient Temperature up to 70 °C (158 °F) without Cooling

Typical Applications

- Plastics
- Rubber
- Paper
- Ceramics
- Food
- Fluids
- Painted Parts
- Asphalt
- Wood
- Glass
- Coated Metals


Optics

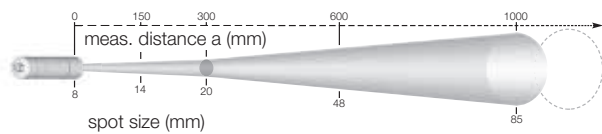

Technical Details

- Spectral Range:** 8...14 μm
- Optics:** Ge lens
- Output:** 4...20 mA, load independent current, temperature linear
- Max Load:** 500 Ω bei 24 V power supply
- Emissivity ϵ :** 0.4...1; adjustable
- Response Time t_{90} :** 300 ms
- Uncertainty:** 1,5% of measuring range/°C ($\epsilon = 1$, TU = 23 °C)
- Repeatability:** 1% of measuring range
- Temp. Dependence:** 0...60 °C: 0.03% of measuring range per °C (23 °C)
- Distance Ratio:** 15:1
- Power Supply:** 24 V_{DC} \pm 25% stabilized, ripple <50 mV
- Ambient Temp.:** 0...70 °C (32...158 °F)
- Storage Temp.:** -20...70 °C (-4...158 °F)
- Housing:** Stainless steel
- Protection:** IP65 (DIN 40050)
- Weight:** 215 g (0.48 lb.)
- Connection Cable:** 2 m (6.6 feet) length, fixed
- CE Label:** According to EU directives about electromagnetic immunity

Dimensions (mm)

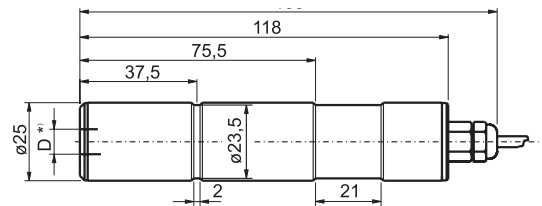

Order Details (Example: TIR-SN 410G)

Model	Measuring Range	Optics	Infrared Detector	Applications
TIR-SN410..	0...100 °C (32...212 °F)	..G = Optic 300 mm (1:15) (Standard)	Thermopile Spectral Range: 8-14 μm	Plastics, Rubber, Paper, Ceramics, Food, Liquids, Painted Parts, Asphalt, Wood, Glass, Coated Metals, No Bright Metal
TIR-SN420..	0...200 °C (32...392 °F)			
TIR-SN430..	-20...300 °C (-4...572 °F)			
TIR-SN450..	0...500 °C (32...932 °F)			

Description

The TIR-FS is a stationary pyrometer for non-contact temperature measurement of metallic surfaces, graphite, ceramics, etc. The very small housing dimensions enable integration into compact production machines. The 2-wire technique ensures very easy electrical connection. The solid and rugged design guarantees reliability, even in rough industrial environments. They are equipped with a connector for electrical installation and this offers the option to use connection cables up to 30 m. For optimal match, 3 different focusable optics with small spot sizes are available.

Special Features

- Very Small Housing Dimensions for Easy Installation, Suited for Use in Confined Spaces
- 2-wire Technique for Current Supply and Temperature Measurement at the Same Time
- Internal Digital Signal Processing for High Accuracy
- High Quality Optics for Detection of Small Measuring Objects
- Built-in LED Targeting Light for Easy Alignment to the Measuring Object

Typical Applications

- Preheating
- Annealing
- Tempering
- Welding
- Forging
- Hardening
- Sintering
- Melting
- Soldering
- Brazing
- Rolling

Technical Details

Spectral Ranges:	TIR-FS 0.8...1.1 μm
Detector:	TIR-FS Si photo diode
Output:	4...20 mA, load independent current, linear temperature output
Max Load:	500 Ω bei 24 V power supply, max. 200 Ω at 18 V max. 800 Ω at 30 V
Emissivity ϵ:	0.2 ... 1; adjustable
Response Time t_{90}:	10 ms
Meas. Uncertainty:	Up to 1500 °C: 0.8% of reading +1 °C above 1500 °C: 1% of reading +1 °C ($\epsilon=1$, $T_{\text{umg.}}=23$ °C)
Repeatability:	0.3% of reading ($\epsilon=1$, $T_{\text{umg.}}=23$ °C)
Power Supply:	24 V _{DC} \pm 25% stabilized, ripple <50 mV 5...30 V _{DC} for LED targeting light (I \leq 30 mA)
Sighting:	LED targeting light
Ambient Temp.:	0...70 °C (32...158 °F)
Storage Temp.:	-20...70 °C (-4...158 °F)
Relative Humidity:	No condensing conditions
Housing:	Stainless steel
Protection:	IP 65 (DIN 40 050)
Mounting Position:	Any
Weight:	275 g (0.61 lb.)
Connection Cable:	2 m - 30 m (6.6 - 98.4 feet) length, connection via connector
CE Label:	According to EU directives about electromagnetic immunity


Optics

The pyrometers are equipped with one of the following optics. These optics are fixed to a certain distance, where at these distances each optic achieves its smallest spot size in relation to the measuring distance. The spot size will change in any other distance (shorter or longer). Please note that the measuring object must be at least as big as the spot size.


The following table shows the size of the spots (spot size M in mm) at a given measuring distance a. Values between the stated data can be calculated by interpolation. The spot size for measuring distance 0 is equivalent to the aperture diameter D of the optics, this value is used e.g. to calculate measuring distances in intermediate distances.

Model	a: M*	a (mm)	M (mm)	a1 (mm)	M1 (mm)	a2 (mm)	M2 (mm)	D (mm)
TIR-FS	140 : 1	250	1.8	600	11.6	1000	23	5.2
	250 : 1		1		9.7		20	
	150 : 1	600	4	1000	10.1	2000	26	
	300 : 1		2		6.8		20	
	155 : 1	1400	9	2000	15.1	3000	25	
	310 : 1		4.5		8.7		16	

* a: M; distance ratio (90% intensity), M: spot size, a: measuring distance, D: aperture (effective lens diameter)

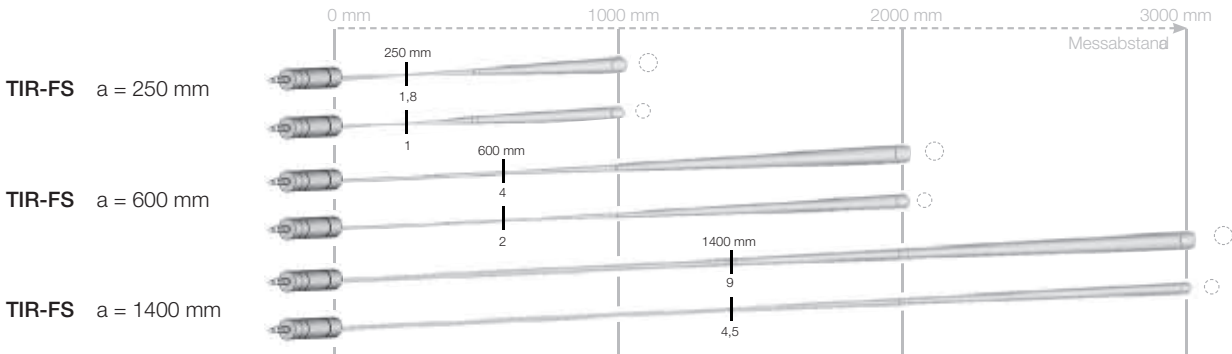

Details

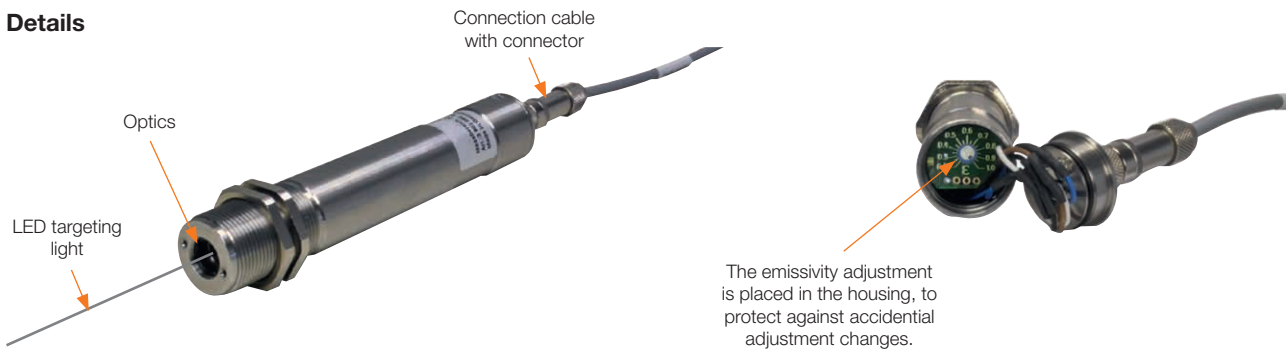


Order Details (Example: TIR-FS4T8 H)

Model	Measuring Range	Optics	Infrared Detector	Applications
TIR-FS4T8..	650 ...1800°C (1202...3272 °F)	..H = Optic 250 mm	Si-photodiode Spectral Range: 0.8...1.1 μm	Preheating, Annealing, Tempering, Welding, Forging, Hardening, Sintering, Melting, Soldering, Brazing, Rolling
TIR-FS4Z3..	800 ...2300°C (1472...4172 °F)	..E = Optic 600 mm		
TIR-FS4Z5..	1100 ...2500°C (2012...4532 °F)	..K = Optic 1400 mm		

Accessories for Stationary Infrared Measuring Instruments (TIR-SN/ -FS)




Model	Description	TIR-SN	TIR-FS
TIR-ZS100	Adjustable Mounting for Rough Environments. Material: Stainless Steel	x	x
TIR-ZS200	Installation and Alignment Support	x	x
TIR-ZS300	Installation Tube	x	x
TIR-ZS400	Stainless Steel Vent Nozzle to Prevent Dust Depositing on Optics	x	x
TIR-ZS500	Bracket for Flange System	x	x
TIR-ZS600	Tube Support with Vent Nozzle and Flange	x	x
TIR-ZS700	Bracket with Silica Glass Pane for Flange System	x	x
TIR-ZS800	Ceramic Tube 600 mm Closed for Flange System, Max. 1600 °C (2912 °F)	x	x
TIR-ZS900	Cooling Housing with Integrated Vent Nozzle for Cooling the Infrared Thermometer and Preventing Dust Deposits on Optics. For Connection to Cooling Water Circuit and Compressed Air. Material: Stainless Steel	x	-
TIR-ZS910		-	x
TIR-ZF610	Connection Cable TIR-FS, 2 m (6.6 feet)	-	x
TIR-ZF620	Connection Cable TIR-FS, 5 m (16.4 feet)	-	x
TIR-ZF630	Connection Cable TIR-FS, 10 m (32.8 feet)	-	x
TIR-ZF640	Connection Cable TIR-FS, 15 m (49.2 feet)	-	x
TIR-ZF650	Connection Cable TIR-FS, 20 m (65.6 feet)	-	x
TIR-ZF660	Connection Cable TIR-FS, 25 m (82 feet)	-	x
TIR-ZF670	Connection Cable TIR-FS, 30 m (98.4 feet)	-	x

Dimensions (mm)


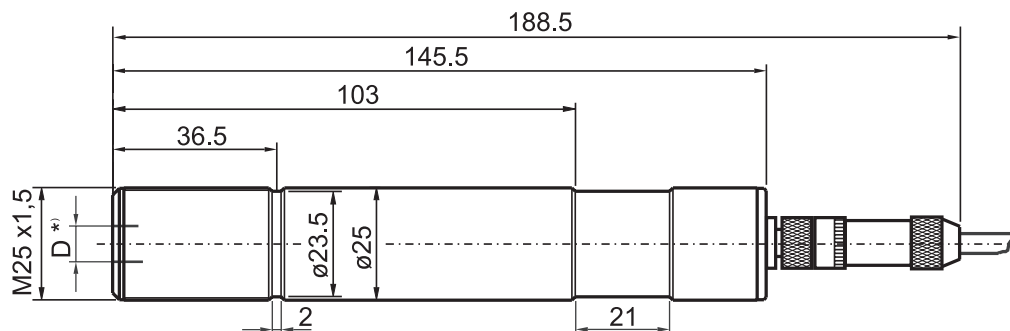


Dimensions Accessories (mm)

TIR-ZS100

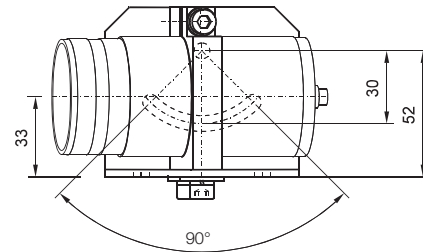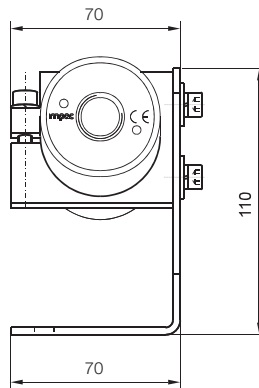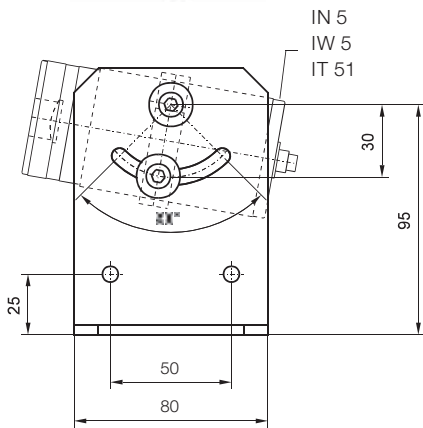


TIR-ZS200

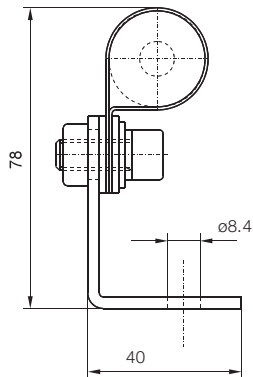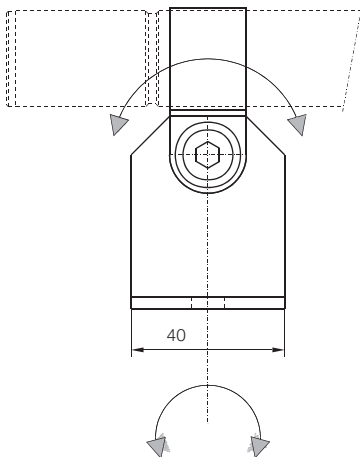


Dimensions Accessories (mm)

TIR-ZS300

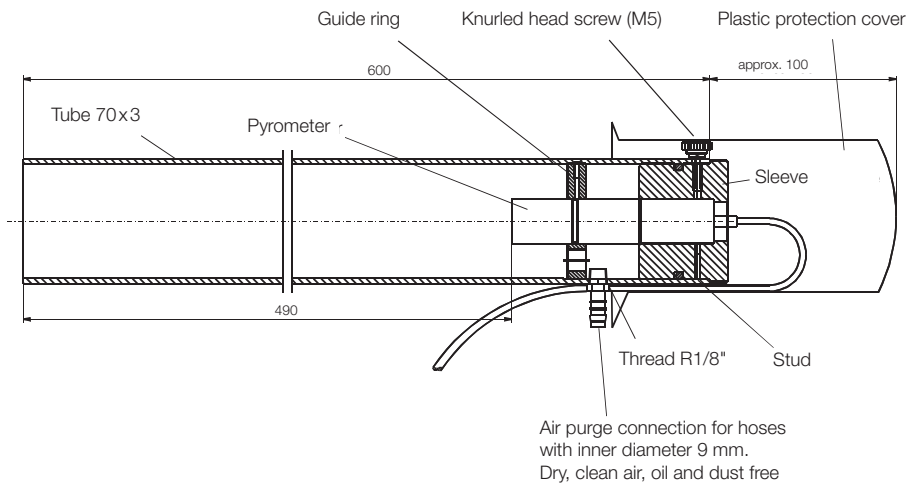


TIR-ZS400

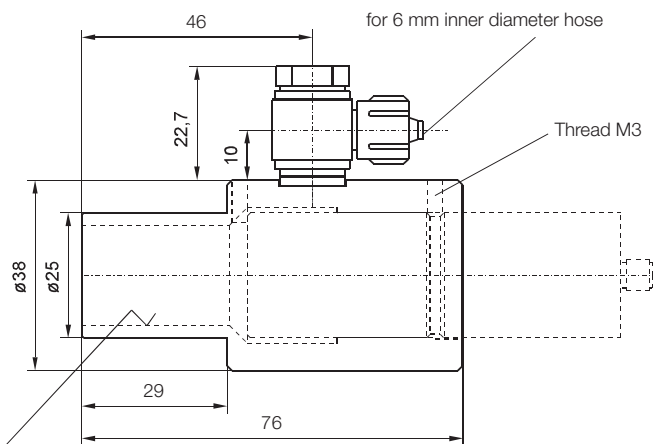


Thread to decrease the reflection

Dimensions Accessories (mm)

TIR-ZS600/800/900

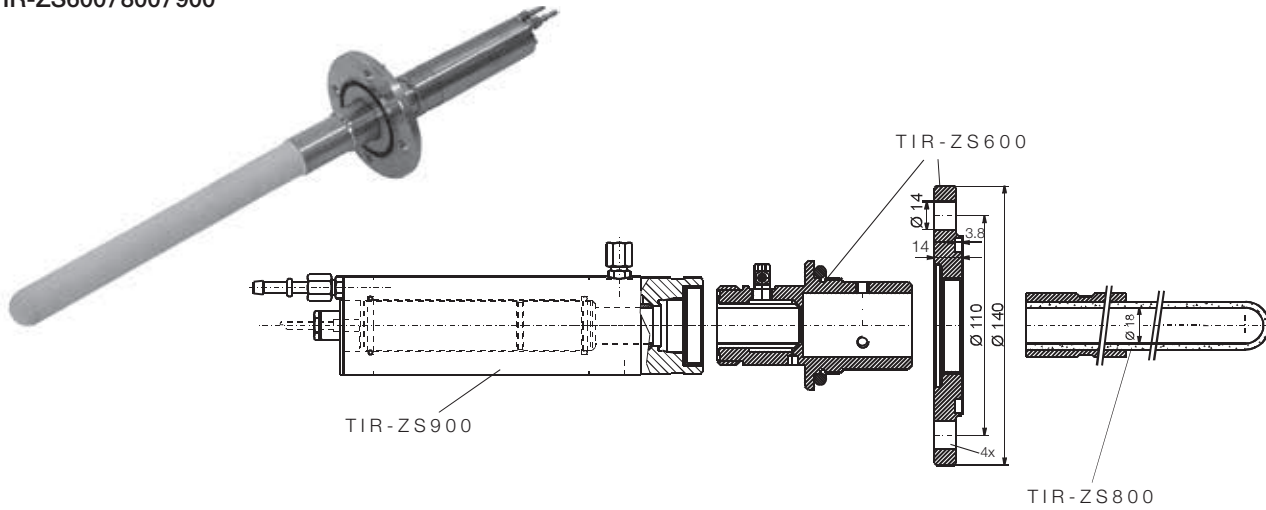


TIR-ZS900

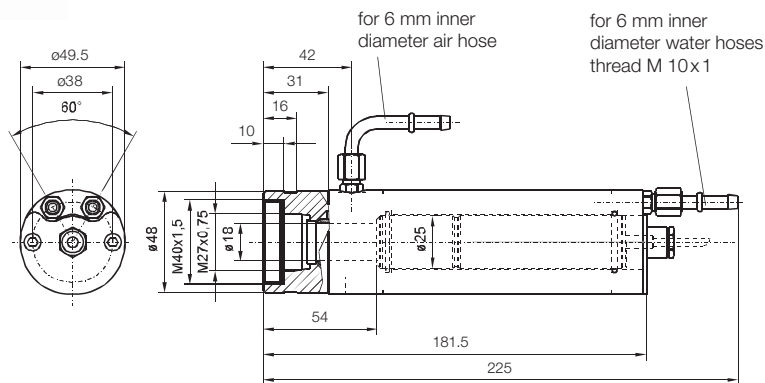

Dimensions Accessories (mm)

TIR-ZS910

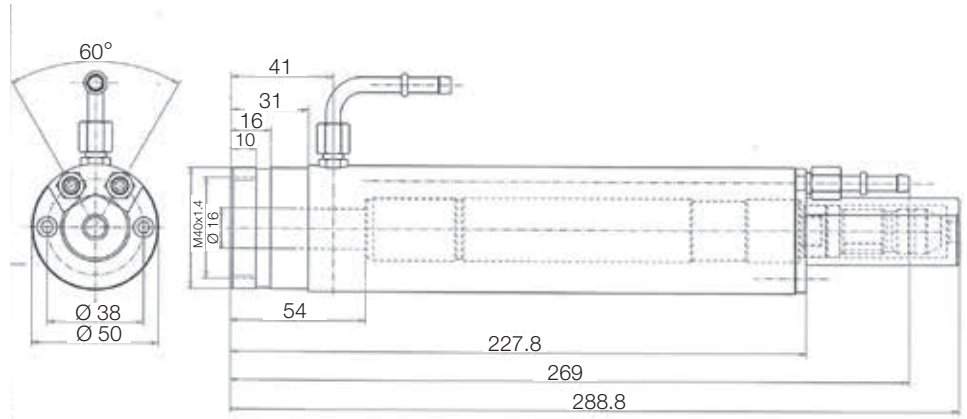

TIR-ZS500/600/700/800

