



# Foam Products


## The Silencer™ CORPORATION

# Silencer QuickLay

Universal Aerosol Adhesive  
"Eco Friendly"

Foam Products Corp. Silencer QuickLay is a water-based aerosol adhesive recommended for installations of luxury vinyl tile, planks, sheets, VCT, Silencer LVT underlayment, carpet cushion, carpet tiles, and cove base repairs over porous and non-porous substrates. It is particularly convenient since it can be used in occupied buildings and greatly reduces the handling and application requirements associated with conventional adhesives. Silencer QuickLay demonstrates highly aggressive grab and shear strength, and has outstanding water and plasticizer resistance.

### ADVANTAGES:

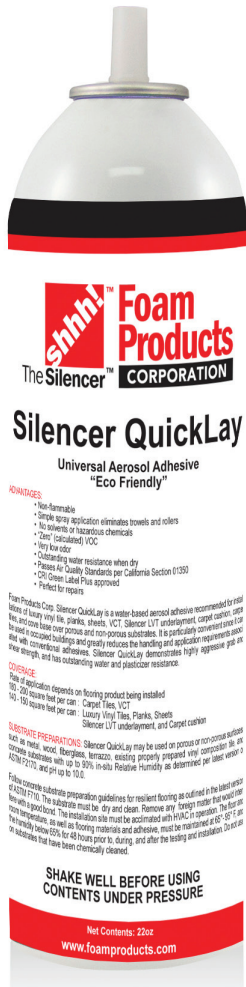

- New point and press delivery tip
- Significantly reduced overspray with the new tip system
- Keeps can, hands, and fingers clean
- Accurate, precise spray pattern...good for all size jobs
- Makes cut in areas simple and clean
- Keeps installer standing upright
- Non-flammable
- "Zero" (calculated) VOC
- Very low odor
- No solvents or hazardous chemicals
- Outstanding water resistance when dry
- Passes Air Quality Standards per California Section 03150
- CRI Green Label Plus approved

#### ADVANTAGES:

- Non-Flammable
- Simple spray application eliminates towels and rollers
- No solvents or hazardous chemicals
- "Zero" (calculated) VOC
- Very low odor
- Outstanding water resistance when dry
- Passes Air Quality Standards per California Section 03150
- CRI Green Label Plus approved
- P-1 rated for repairs

Foam Products Corp. Silencer QuickLay is a water-based aerosol adhesive recommended for installation of luxury vinyl tile, planks, sheets, VCT, Silencer LVT underlayment, carpet cushion, carpet tiles, and cove base repairs over porous and non-porous substrates. It is particularly convenient since it can be used in occupied buildings and greatly reduces the handling and application requirements associated with conventional adhesives. Silencer QuickLay demonstrates highly aggressive grab and shear strength, and has outstanding water and plasticizer resistance.

#### COVERAGE:

Rate of application depends on flooring product being installed  
100-200 square feet per can: Carpet Tiles, VCT  
150-200 square feet per can: Luxury Vinyl Tiles, Planks, Sheets  
Silencer LVT underlayment, and Carpet cushion

**SUBSTRATE PREPARATIONS:** Silencer QuickLay may be used on porous or non-porous substrates such as wood, fiberglass, terrazzo, existing properly prepared vinyl composition tile, etc. according to ASTM D7028 and pH up to 10.0.

Follow concrete substrate preparation guidelines for resilient flooring as outlined in the latest version of ASTM F770. This substrate must be dry and clean. Remove any foreign matter that would interfere with application. This installation site must be acclimated with HVAC in operation. The floor and room temperatures, as well as flooring materials and adhesive, must be maintained at 65°-85°F and the humidity must be 30% for 48 hours prior to, during, and after the heating and installation. Use only on substrates that have been chemically cleaned.

SHAKE WELL BEFORE USING  
CONTENTS UNDER PRESSURE

Net Contents: 22oz  
www.foamproducts.com

Foam Products Corp.  
350 Beamer Road Calhoun, GA 30701  
Telephone: 800-526-3626  
www.foamproducts.com