

LED Canopy



LED Canopy UC101E-102E



Features

- 35W / 70W LED Canopy
- High efficacy >115lm/W
- Color Rendering Index ≥ 70
- Uniform light output
- Trapezoid radiating fin structure

Materials / Finish





- Body: Die-casting aluminium housing with anti-corrosive, thermostable finish
- Diffuser: PC
- Chips: Lumileds 3030

Installation / Mounting

- Quick Installation with user friendly mounting bracket
- Stainless steel safety cable for double security

Standards

- Class II Electrical
- IP65
- IK09
- UL, FCC, DLC

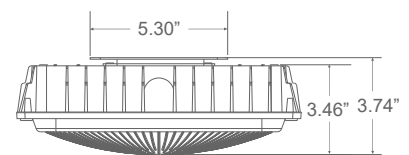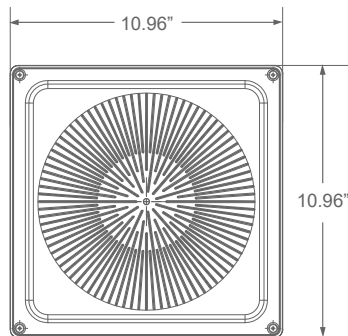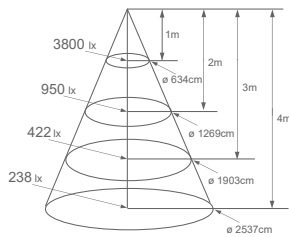

Model	Wattage	Color Temp	Beam Angle	CRI (Ra)	Lumen
UC101E-35W/730	35W	3000K	145°	≥ 70	3800 lm
UC101E-35W/740	35W	4000K	145°	≥ 70	4000 lm
UC101E-35W/750	35W	5000K	145°	≥ 70	4200 lm
UC102E-70W/730	70W	3000K	145°	≥ 70	7800 lm
UC102E-70W/740	70W	4000K	145°	≥ 70	8000 lm
UC102E-70W/750	70W	5000K	145°	≥ 70	8200 lm