



# EnGenius Cloud Managed Security Access Point

Optimal Performance, Enterprise Security & Cloud Management

ECW220S

## Product Highlights

EnGenius ECW220S Cloud Managed Wi-Fi 6 2x2 security access point features a 24/7 intelligent wireless security system while providing maximum Wi-Fi performance. The security AP also provides zero-wait DFS to avoid connection disruption, built-in RF spectrum analysis to identify the most efficient channels, and sensors to detect nearby Bluetooth devices.

## Features & Benefits

- Wi-Fi 6 technology for high-performance Wi-Fi in high-density, multi-device environments
- 2x2 antennas to support up to 1,200 Mbps in 5 GHz & 574 Mbps in 2.4 GHz
- 1 GbE throughput and 802.3af support for flexible installation over 100 meters (328 feet)
- Wireless intrusion detection system (WIDS) for threat detection
- Wireless intrusion protection system (WIPS) for attack remediation
- Zero-wait DFS to avoid client disruption when radar is detected on DFS channels
- Dedicated scanning radios for 24/7 wireless security monitoring
- RF spectrum analysis for identifying clean channels and ensuring all SSIDs are legitimate
- Bluetooth 5 low energy for BLE device detection and location-based extended advertising

## Standards

IEEE 802.11b/g/n on 2.4 GHz

IEEE 802.11ax on 5 GHz

(Backward compatible with 802.11b/g/n/ac)

2.4 GHz Bluetooth 5 Low Energy (BLE) Radio

## Antenna

2 x 2.4 GHz: 4dBi

2 x 5 GHz: 5dBi



## Scanning Radio

1 x 2.4 GHz

1 x 5 GHz

Integrated Omni-Directional Antenna

BLE: 6 dBi

## Physical Interface

1 x 10/100/1000 BASE-T, RJ-45 Ethernet Port

1 x DC Jack

1 x Reset Button

## LED Indicators

1 x Power

1 x LAN

1 x 2.4 GHz

1 x 5 GHz

1x Scanning Radio

1x Bluetooth 5 Low Energy

## Power Source

Power-over-Ethernet: 802.3af Input

12VDC /1.5A

## Maximum Power Consumption

12.8W

## Wireless & Radio Specifications Operating Frequency

Dual-Radio Concurrent 2.4 GHz & 5 GHz

Operation Modes

Managed mode: AP and Mesh

Frequency Radio

2.4 GHz: 2400 MHz ~ 2482 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz, 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5850 MHz

Transmit Power

Up to 22 dBm on 2.4 GHz

Up to 22 dBm on 5 GHz

(Maximum power is limited by regulatory domain)

Tx Beamforming (TxBF)

Increasing signal reliability and transmitting distance.

Radio Chains/Spatial Stream

2x2:2

SU-MIMO

Two (2) spatial streams Single User SU-MIMO for up to 574 Mbps wireless data rate with HE40 bandwidth to a 2x2 wireless client device under the 2.4GHz radio. Two (2) spatial stream Single User SU-MIMO for up to 867 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.

MU-MIMO

Two (2) spatial streams MU-MIMO up to 1,200 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.

Two (2) spatial streams MU-MIMO up to 574 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

Supported Data Rates (Mbps):

802.11ax:

2.4 GHz: 9 to 287 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MSC11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

Supported Radio Technologies

802.11ax: Orthogonal Frequency Division Multiple Access(OFDMA)

802.11ac/a/g/n: Orthogonal Frequency Division Multiple (OFDM)

802.11b: Direct-sequence spread-spectrum (DSSS)

Channelization

802.11ax supports high efficiency (HE) –HE 20/40/80 MHz

802.11ac supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11n supports high throughput (HT) –HT 20/40 MHz

802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

Dynamic Frequency Selection (DFS) Certified

Supported Modulation

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

Management Multiple BSSID

8 SSIDs on both 2.4GHz and 5GHz bands

VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

Spanning Tree

Supports 802.1d Spanning Tree Protocol

QoS (Quality of Service)

Compliant With IEEE 802.11e Standard

WMM

SNMP

v1, v2c, v3

MIB

I/II, Private MIB

Wireless Security

WPA3 Enterprise

WPA3-PSK (SAE)

WPA3/WPA2-PSK Mixed

WPA2 Enterprise (AES)

WPA2 AES-PSK

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

Wireless Monitoring

WIPS/WIDS Dedicated Dual-Band Radios

Rogue AP & Device Detection

RF Spectrum Analysis

Zero-Wait DFS

Environment & Physical

Temperature Range

Operating: 32°F~104°F (0 °C~40 °C)

Storage: -40 °F~176 °F (-40 °C~80 °C)

Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

Dimensions & Weight

Weight: 0.86 lbs. (392 g)

Length: 6.30" (160 mm)

Width: 6.30" (160 mm)

Height: 1.31" (33.2 mm)

Package Contents





- 1 – ECW220S Cloud Managed Indoor Access Point
- 1 – Ceiling Mount Base (9/16" Trail)
- 1 – Ceiling Mount Base (15/16" Trail)
- 1 – Ceiling and Wall Mount Screw Kit
- 1 – Quick Installation Guide

Warranty


2 Year

Certifications

- CE
- FCC
- IC

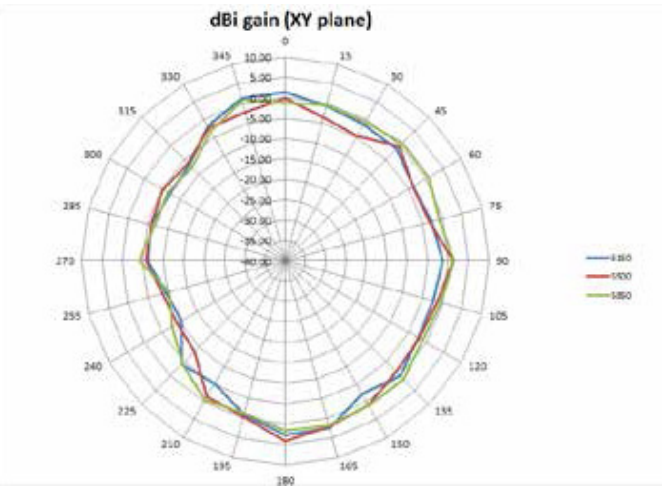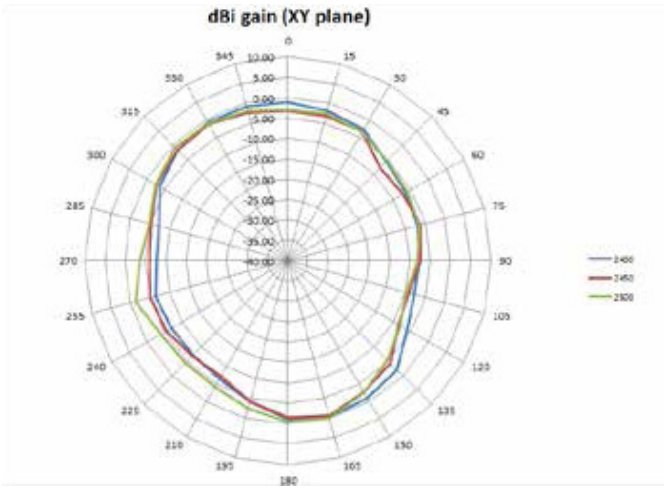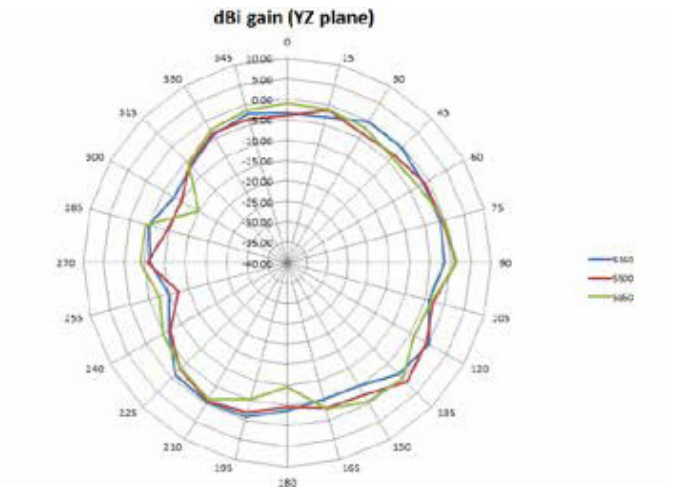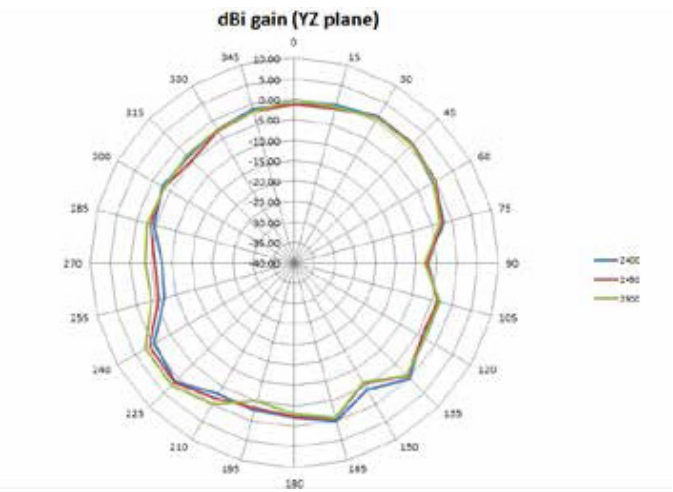

## ECW220S Security Access Point

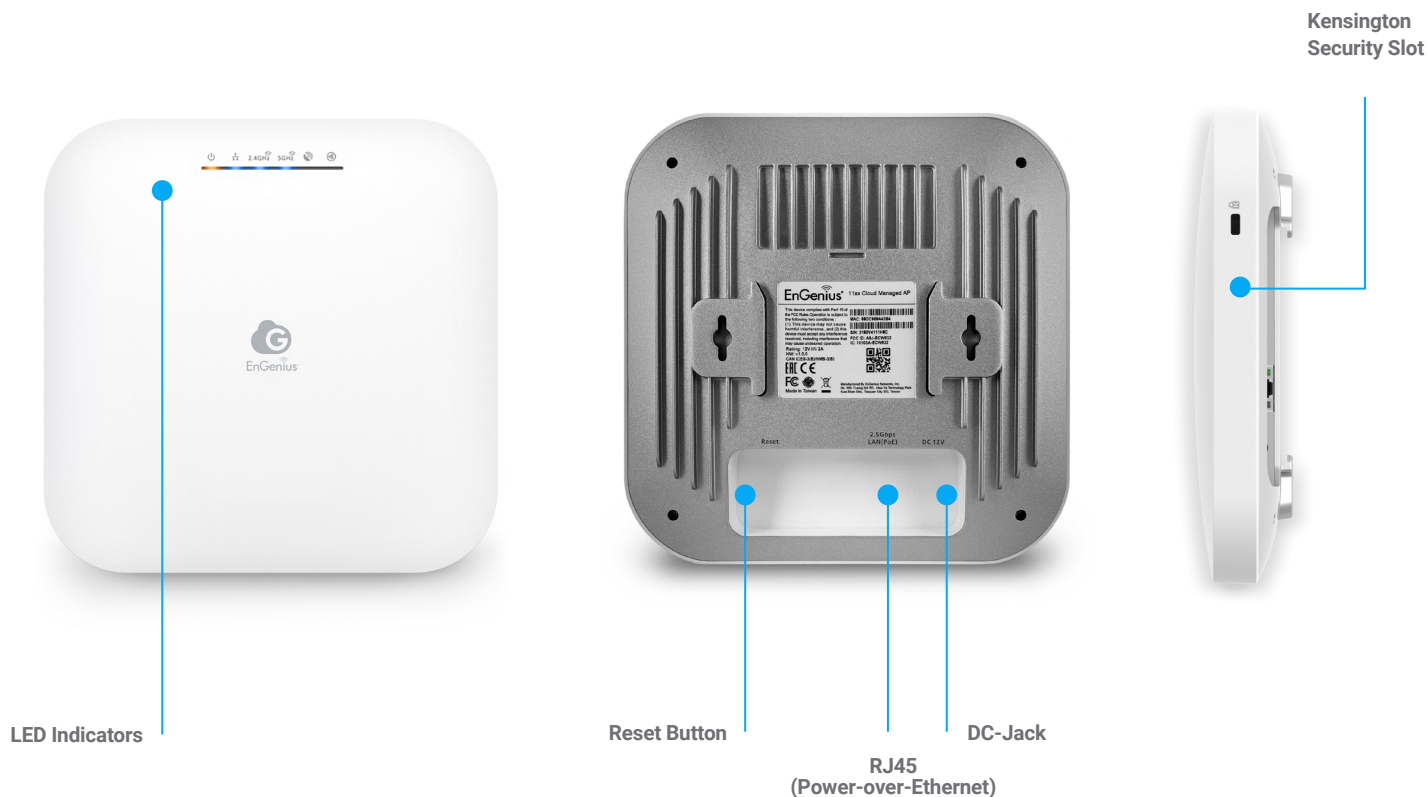

## Plug & Play with Zero Configuration

# Scan & Go



EnGenius Technologies | 1580 Scenic Ave. Costa Mesa, CA 92626

Email: [partners@engeniustech.com](mailto:partners@engeniustech.com) | Website: [engeniustech.com](http://engeniustech.com)

Version: 1.00 11/2021

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2021 EnGenius Technologies, Inc. All rights reserved. Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on distance between devices or traffic and bandwidth load in the network.