

LED Floodlight



LED Wall Pack UF101E-104E



Features

- 30W / 60W / 90W / 120W LED Full or Half Cut-off Wall Pack
- High efficacy >110lm/W
- Color Rendering Index >= 70
- Uniform light output

Materials / Finish

- Body: Die-casting aluminium housing with anti-corrosive, thermostable finish
- Chips: Lumileds / Samsung

Installation / Mounting

- Quick Installation with user friendly mounting bracket




Standards

- Class II Electrical
- IP65
- UL, FCC, DLC

Accessories (Optional)



Full cut off version is available on request

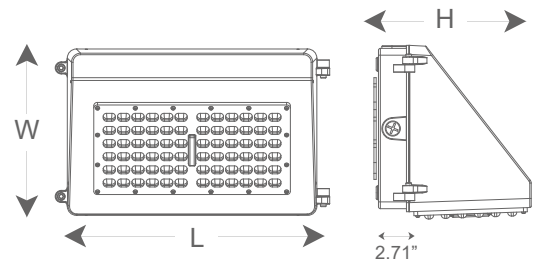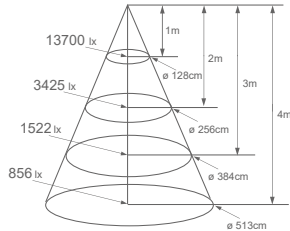

	(L)	(W)	(H)
30W	14.27"	8.66"	8.19"
60W	14.27"	8.66"	8.19"
90W	14.27"	8.66"	8.19"
120W	14.27"	8.66"	8.19"



Model	Voltage	Wattage	Color Temp	Beam Angle	CRI (Ra)	Lumen
UF101E-30W/740	90-305V	30W	4000K	125 x 46°	≥70	3350 lm
UF101E-30W/750	90-305V	30W	5000K	125 x 46°	≥70	3400 lm
UF101E-30W/760	90-305V	30W	6000K	125 x 46°	≥70	3500 lm
UF102E-60W/740	90-305V	60W	4000K	125 x 46°	≥70	6800 lm
UF102E-60W/750	90-305V	60W	5000K	125 x 46°	≥70	6950 lm
UF102E-60W/760	90-305V	60W	6000K	125 x 46°	≥70	7200 lm
UF103E-90W/740	90-305V	90W	4000K	125 x 46°	≥70	9850 lm
UF103E-90W/750	90-305V	90W	5000K	125 x 46°	≥70	10050 lm
UF103E-90W/760	90-305V	90W	6000K	125 x 46°	≥70	10250 lm
UF104E-120W/740	90-305V	120W	4000K	125 x 46°	≥70	13400 lm
UF104E-120W/750	90-305V	120W	5000K	125 x 46°	≥70	13650 lm
UF104E-120W/760	90-305V	120W	6000K	125 x 46°	≥70	13700 lm