

Pressure Transmitter with Ceramic Sensing Element



measuring
•
monitoring
•
analyzing

SEN-86/87



- Measuring Ranges: -30" Hg...0 to 0...10000 PSIG
- Max. Media Temperature: 250 °F
- DIN Accuracy Class: 0.5
- Materials: Stainless Steel, Ceramic, and NBR
- Connection Options: 1/4" NPT or 1/2" NPT
- OEM Targeted Product
- Shown with Optional Loop-Powered In-line Display Model AUF



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECH REPUBLIC, EGYPT, FRANCE, GERMANY, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, UNITED KINGDOM, USA, VIETNAM

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205
Main Office:
1.800.998.1020
1.412.788.4890
info@koboldusa.com
www.koboldusa.com



Pressure Sensor with Ceramic Sensor Element Model SEN-86/87

Description


The KOBOLD SEN-86/87 series pressure transmitters are cost-effective and contain a rugged ceramic sensing element. The SEN-86/87 series offers good accuracy, a compact reliable design and is well suited for OEM applications. The wetted materials are compatible with many different medias and the sensing technology can handle a variety of mechanical loads. These are widely used in the following applications: plant engineering, environmental engineering, machine building, and cooling circuits.

Technical Data

Technology:	Internal Diaphragm
Pressure Type:	Gauge Pressure
Housing:	303 Stainless Steel
Connection:	1/4" or 1/2" NPT, 304 Stainless Steel
Sensor Element:	Piezo-resistive Ceramic (Al ₂ O ₃)
Measuring Principle:	Thick Film Technology (DMS)
O-Ring:	NBR (Others upon Request)
Max. Temperature:	
Storage:	-22 ... 212 °F
Media:	-4 ... 250 °F
Ambient:	-22 ... 212 °F
Pressure Limitation:	< 870 PSIG: 2 x Range > 870 PSIG: 1.5 x Range
Accuracy Class:	0.5
Repeatability:	≤ ± 0.15 % of FS
Characteristic Deviation:	≤ ± 0.3 % of FS
Stability (Per Year):	≤ ± 0.2 % of FS (Under Reference Conditions)
Electrical Connection:	Plug According to DIN 43 650 A, Plug M12x1, Cable Connection

Auxiliary Power:	15 ... 32 V _{DC}
Output:	4 - 20 mA (2-wire), 0 - 10 V _{DC}
Load (Ω):	≤ (U _B - 15V) / 0.02 A (for 4 - 20 mA)
Response Time:	≤ 1 ms (within 10 - 90 % of f/s)
Compensated Range:	-13 ... 185 °F
Temperature Drift:	Zero Point: ≤ ± 0.02 % FS/K Span: ≤ ± 0.01 % FS/K
Protection:	IP 65


Dimensions

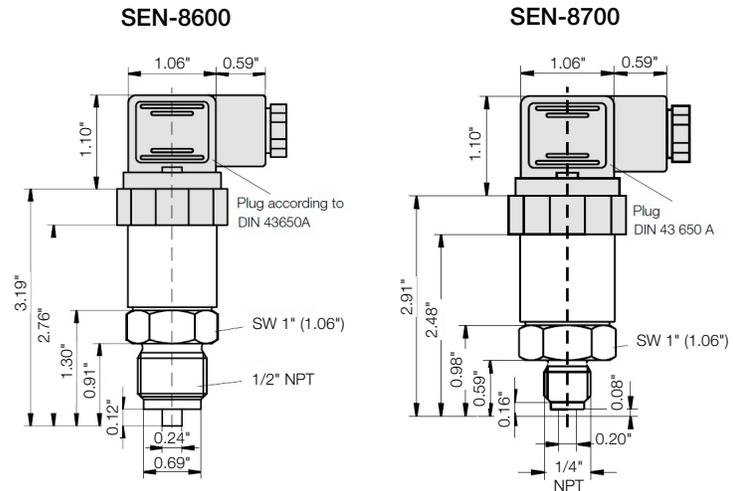

Order Details (Example: SEN-8600N4 0 P025)

Process Connection	Model Number	Output Signal	Measuring Range
1/2" NPT	SEN-8600N4..	..0.. = 4 - 20 mA, 2-Wire	..H315 = -30...0 in Hg
			..P025 = 0...15 PSIG
			..P045 = 0...30 PSIG
			..P055 = 0...50 PSIG
			..P060 = 0...60 PSIG
			..P065 = 0...100 PSIG
			..P075 = 0...150 PSIG
			..P085 = 0...200 PSIG
			..P090 = 0...300 PSIG
			..P095 = 0...400 PSIG
1/4" NPT	SEN-8700N2..	..2.. = 0 - 10 V	..P100 = 0...500 PSIG
			..P105 = 0...600 PSIG
			..P115 = 0...1000 PSIG
			..P125 = 0...1450 PSIG
			..P130 = 0...2000 PSIG
			..P135 = 0...2300 PSIG
			..P140 = 0...3000 PSIG
			..P145 = 0...3600 PSIG
			..P150 = 0...5000 PSIG
			..P155 = 0...5800 PSIG
			..P160 = 0...7500 PSIG
			..P165 = 0...10000 PSIG

AUF Display Option

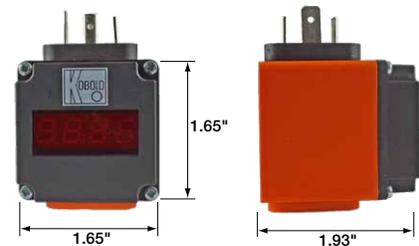

Order Details

Model	Description
AUF-1000	Standard Plug-on Display, 4 - 20 mA, 2-wire
AUF-1001	Plug-on Display with Open Collector, 4 - 20 mA, 2-wire

See model AUF product datasheet for further technical details