

**TORO** Count on it.

**T4240**  
High Output 5-Unit Mower




**High Output**  
**Superb Performance**

The T4240 is a high output mower able to compete with tractor drawn gangmowers in large open areas, yet has the versatility to be used in confined spaces as either a triple, or a five unit machine. Excellent all round visibility from the seating position allows cutting up to obstacles and helps ensure a safer operation.

## T4240

- Kubota® 35.3 kW (47.3 hp) diesel engine
- 346 cm (136") width of cut
- 4WD transmission system
- Various cutting unit configurations
- Heavy duty construction

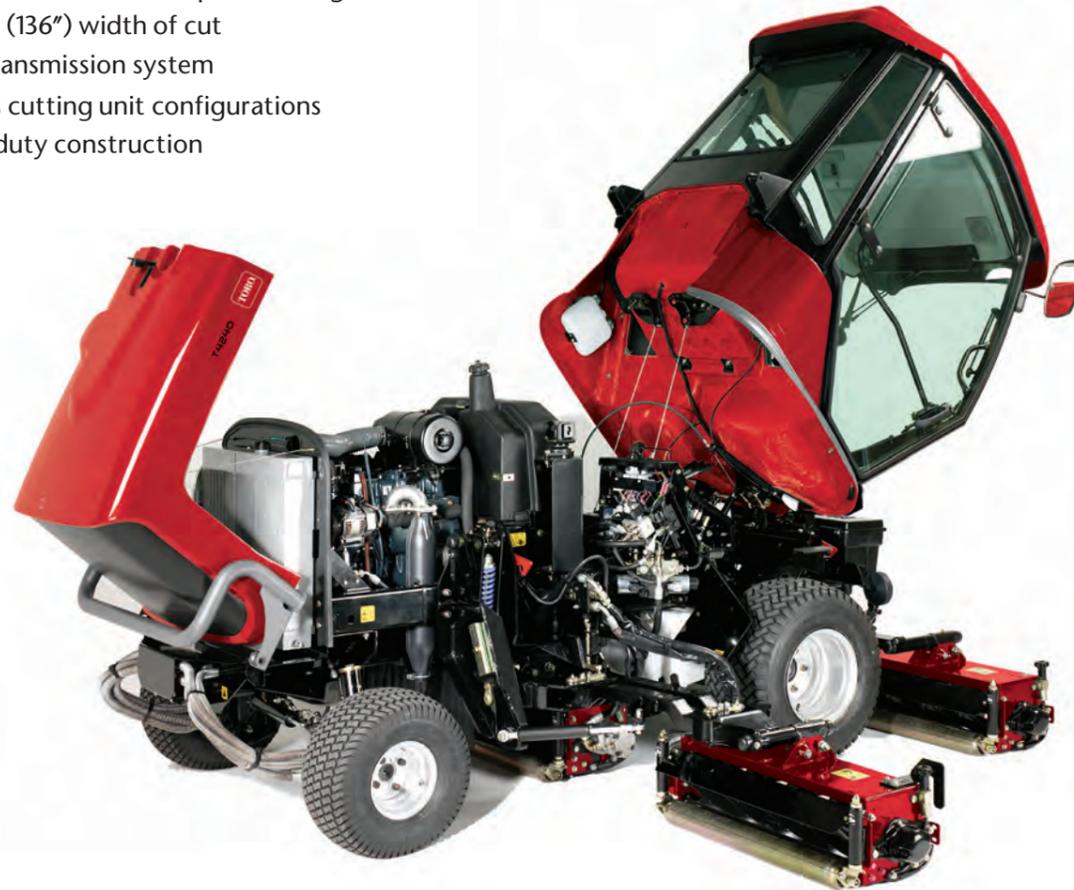

## Full Weather ROPS Cab

The option of a fully glazed all weather ROPS certified Cab, gives maximum visibility and a safe comfortable working environment. Air conditioning and heater systems are available, giving the operator added comfort in all weathers. The cab can be tilted forwards to gain access for easy servicing.



Large toolbox for storage.



High specification tyres for climbing kerbs.



Accessible centre unit for easy adjustment.



Heavy duty commercial cutting units.

## Transmission System

The T4240 transmission system allows the machine to deliver excellent high torque performance on slopes. To help reduce travelling time between sites, the machine has a maximum transport speed of 22 km/h (14 mph).




## Breakback System

The two outer cutting units incorporate a breakback system, which minimises damage if contact is made with obstructions. When not in use the outer units fold neatly back behind the front wheels and away from the operator's line of sight.



## Rear Axle

The strong rear axle assembly incorporates a steering shockload protection system. This feature is particularly beneficial when climbing kerbs or working in rough terrain. It also protects the rear axle components against potential damage.

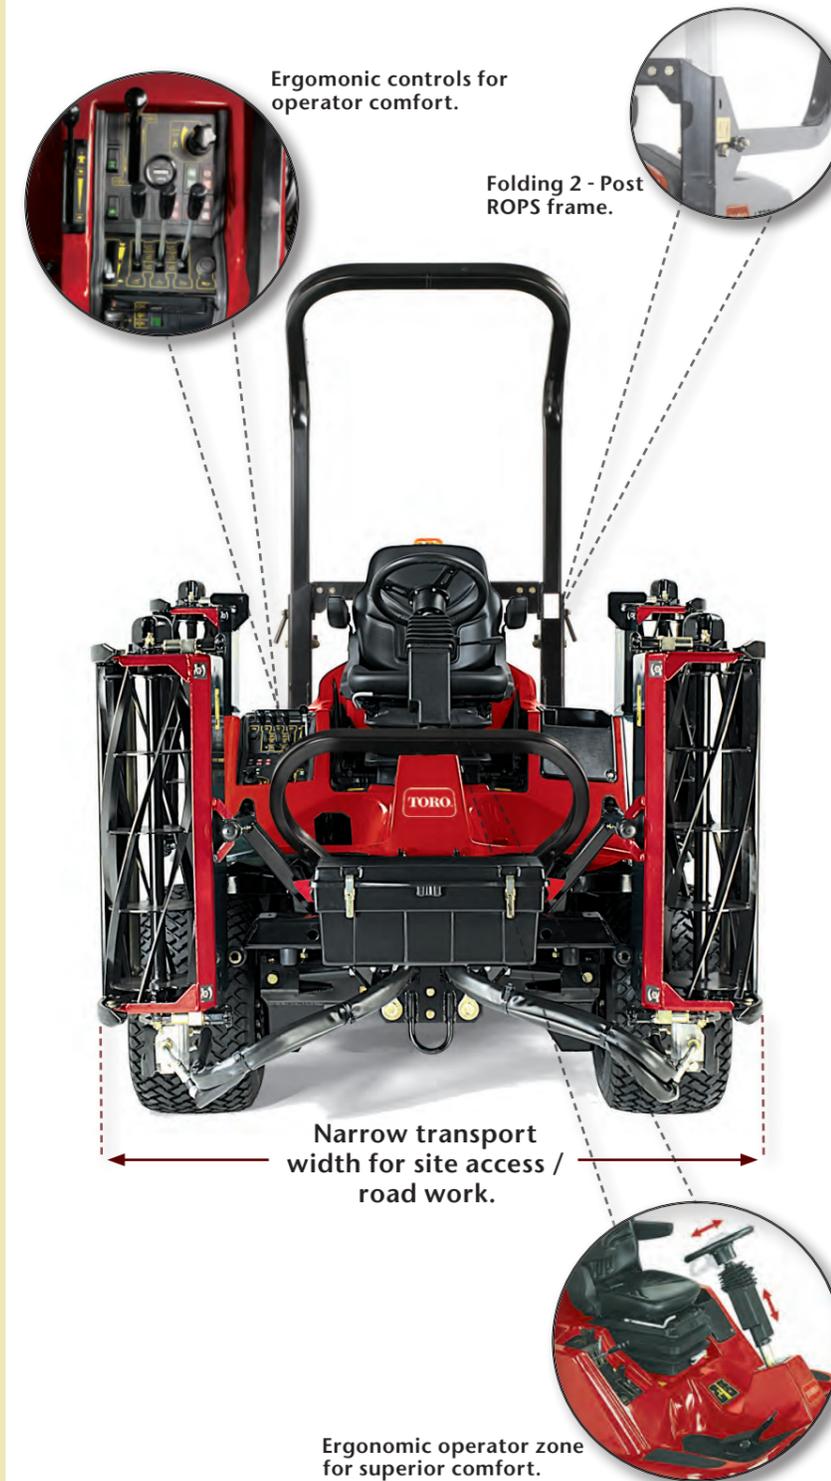

## Drive System

The T4240 has two switchable modes to suit the different traction requirements for grass and road surfaces. Road mode enables a smooth 4 wheel-drive operation that minimises tyre wear. Work mode provides superior 4 wheel-drive traction on loose or soft surfaces and also enables the use of the hydraulic differential lock for enhanced traction in extreme conditions.

# Specifications - T4240 High Output 5-Unit Mower

| SPECIFICATIONS           | T4240   |
|--------------------------|---|
| ENGINE                   | Kubota® V2203, 4-cylinder indirect injection, electric start  |
| RATING                   | 35.3 kW (47.3 hp) @ 2800 rpm net  |
| FUEL                     | Diesel  |
| COOLING                  | Water cooled  |
| TRANSMISSION             | Closed loop hydrostatic   |
| DRIVE SYSTEM             | Automatic 4WD with foot operated diff lock  |
| GROUND PRESSURE          | 0.7 - 1.41 kg/cm (10 - 20 psi) Depending on turf conditions   |
| STEERING                 | Hydrostatic rear wheel steering with shockload protection   |
| BRAKES                   | Hydrostatic service brakes using oil immersed disc brakes   |
| FUEL SYSTEM              | 70 Litres (15.4 UK Gallons)   |
| HYDRAULIC CAPACITY       | 77 Litres (17 UK Gallons). Diagnostic hydraulic test ports. 10 micron filtration  |
| TYRES: FRONT             | 26 x 12.00 - 12, 4 ply Turf pattern   |
| TYRES: REAR              | 20 x 10.00 - 8, 4 ply Turf pattern  |
| GROUND SPEED: TRANSPORT  | 22 km/h (0 - 14 mph) Forward; 11 km/h (0 - 7 mph) Reverse   |
| GROUND SPEED: MOWING     | 13 km/h (0 - 8 mph) Forward; 6.5 km/h (0 - 4 mph) Reverse   |
| CONTROLS                 | Cutting unit lift configuration switch - Hand throttle - Key ignition switch - Cutting unit drive switch (On - Off - Reverse / Backlap) - Parking brake (Single hand operated lever) - Foot operated forward / reverse pedal - Foot operated differential lock - Hand operated weight transfer adjustment - Hand operated button horn - Adjustable steering wheel/column - 3 hand operated levers for independent lift to each cutting unit |
| SEAT (STANDARD)          | High back with adjustable angle, arm rests, adjustable suspension to suit weight of operator. Height adjustment - 60 mm, Fore / aft adjustment - 150 mm   |
| ROPS*                    | Folding 2 Post ROPS Frame (designed and tested to EU directive 79/622/EEC)  |
| OPTIONS                  | Standard full weather ROPS cab - Heater blower / Aircon with heater blower for ROPS cab - Cab tilt kit - Fabric seat upgrade kit - Deluxe seat (vinyl / fabric) - Full European lighting kit - Flashing beacon - Front roller with Smooth or Grooved rollers for floating configuration   |
| OPERATOR SAFETY          | Cutting unit drive disengages when operator leaves seat. Engine starts only when forward / reverse pedal is in neutral, the parking brake is applied and the cutting units are disengaged.  |
| WARNING LIGHT INDICATORS | Hydraulic oil temperature - Engine pre-heat - Engine coolant temperature - Battery charge - Hydraulic return filter blockage - Engine oil pressure - Hydraulic transmission filter blockage   |
| INTERLOCK LIGHTS         | Cutterdrive switch off - Parking brake engaged - Transmission in neutral  |
| GAUGES                   | Fuel tank level indicator - Hydraulic oil tank sight glass - Digital hourmeter  |
| CUTTING UNITS            |   |
| TYPE                     | MK3 fully interchangeable cutting unit - 762 mm (30") width   |
| CONFIGURATION            | MK3 200 mm (8") Fixed and Floating or MK3 250 mm (10") Fixed  |
| CUTTING CYLINDER         | 4, 6, 8 or 10 blade 200 mm (8") diameter or 4, 6 or 8 blade 250 mm (10") diameter   |
| CLIP FREQUENCY           | 4 blade: 23 cuts/m (21 cuts/yd) at 11 km/h (7 mph)<br>6 blade: 34 cuts/m (31 cuts/yd) at 11 km/h (7 mph)<br>8 blade: 46 cuts/m (42 cuts/yd) at 11 km/h (7 mph)  |
| CYLINDER DRIVE           | Direct drive hydraulic motor  |
| CUTTING UNIT LIFT        | Fully independent hydraulic lift  |
| CYLINDER TO BEDKNIFE     | Handwheel adjustment  |
| CYLINDER SPEED           | 1050 rpm approx.  |
| HEIGHT OF CUT            | Spanner adjustment 12 - 80mm (1/2" - 3 1/8")  |
| REAR ROLLERS             | Smooth 76 mm (3") diameter  |
| WEIGHT**                 | 1870 kg (4123 lbs)  |
| TURNING CIRCLE           | 1920 mm (75 1/2")   |
| WARRANTY                 | Two-year limited  |
| CERTIFICATION            | CE Certified  |

\* Approved folding 2 post ROPS frame is fitted as standard, unless otherwise specified with a ROPS cab.

\*\*All weights include: 2 post ROPS, 8 inch 6 blade cutterheads and with a full tank of fuel. It excludes the operator and any other options.


## PROFESSIONAL SERVICES

### Training

Technical Service and Operator Courses are available. Contact our After Sales Team for more details on the number below.

### Genuine Parts

Keep the productivity and performance of your equipment at its peak by using genuine replacement parts. Find and identify your replacement parts online at [www.hayter.co.uk](http://www.hayter.co.uk)

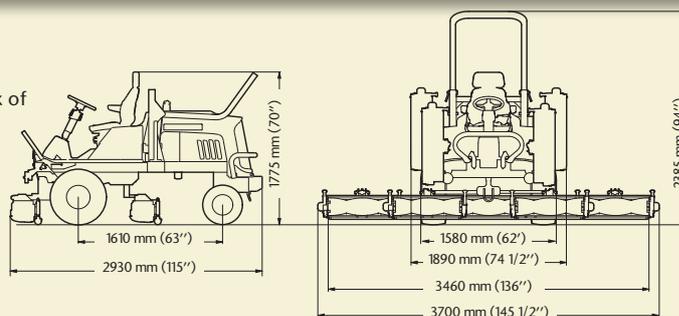

For more information or to arrange a demonstration contact:

**Hayter Limited**  
Spellbrook, Bishop's Stortford, Hertfordshire.  
England CM23 4BU  
Tel: +44 (0) 1279 723444  
Fax: +44 (0) 1279 600338  
email: [sales@hayter.co.uk](mailto:sales@hayter.co.uk)  
[www.hayter.co.uk](http://www.hayter.co.uk)

Products depicted in this brochure are for demonstration purposes only. Actual products offered for sale may vary.

©2010 The Toro Company  
8111 Lyndale Ave. S.  
Bloomington, MN 55420-1196  
GB Part No. 200-4620 B.  
[www.toro.com](http://www.toro.com)



**Count on it.**