

Digital Pressure Transmitter



measuring
•
monitoring
•
analyzing

PDA



PDA-25
PDA-35

PDA-15

- Measuring Range: -30...0" Hg to 0...5800 PSI or -1...0 bar to 0...400 bar
- Max. Temperature: 176 °F
- Accuracy: $\pm 0.5\%$ of Full Scale ($\pm 1.0\%$ of Full Scale for Ranges ≤ 30 PSI)
- Housing / Fitting Material: Stainless Steel
- Connection: $\frac{1}{4}$ " NPT, $\frac{1}{2}$ " NPT, G $\frac{1}{4}$, or G $\frac{1}{2}$



KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECH REPUBLIC, EGYPT, FRANCE, GERMANY, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, UNITED KINGDOM, USA, VIETNAM

KOBOLD Instruments, Inc.
1801 Parkway View Drive
Pittsburgh, PA 15205
Main Office:
1.800.998.1020
1.412.788.4890
info@koboldusa.com
www.koboldusa.com




Digital Pressure Transmitter Model PDA

Description

The KOBOLD pressure sensor, model PDA, is a cost effective electronic pressure transmitter with digital indication of actual pressure. An analog output of 0(4)-20 mA is available for remote transmission of the measured value. A switch output is also available. A piezoresistive sensor is used and the PDA offers high switching accuracy. Long term stability, repeatability, and a compact, rugged design makes the PDA an ideal sensor for use in many OEM applications. Common applications include: compressor monitoring, installations in the machinery industry, and pumps.

Dimensions (mm)

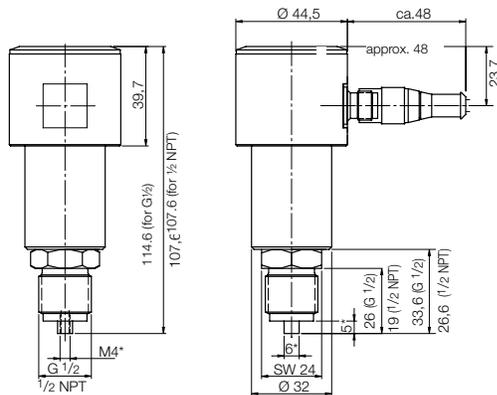

*No Nipple on NPT Thread
(1/4" male connection available as option)

Technical Details

Housing:	303 Stainless Steel
Process Connection:	1/4" or 1/2" NPT 316 L Stainless Steel Option G 1/4 or G 1/2 Male (Others on Request)
Gasket:	FKM (Option: EPDM)
Sensor Element:	Piezoresistive Ceramic Cell
Indication:	3-digit LED, Height 7 mm
Resolution:	Max. 0.2 PSI (Depending on Measuring Range and Measured Value)
Max. Media Temp.:	-4 ... 176 °F
Max. Ambient Temp.:	-4 ... 176 °F
Max. Over Pressure:	Up to 870 PSI: 3x From 1450 PSI: 2x the Range 5800 PSI: 1.5x the Range
Supply Voltage:	24 V _{DC} ± 20 %
Power Consumption:	Approx. 100 mA (without Switching Output)
Electrical Connection:	M12x1 Plug
Standard Settings:	Programmable via 3 Buttons (Switching Point, Hysteresis, 0-20 mA or 4-20 mA, Start Point / End Point (Current), Filter, Zero (Tare), Security Code)
Over/Under Range:	On LED Display
Load:	Max. 500 Ω
Switching Option:	1x PNP or NPN Semiconductor, Max. 300 mA, Short-circuit Proof
Contact:	N/O or N/C, Programmable
Output Indicator:	1 LED
ON/OFF-switch. Delay:	0.5 ... 99.5 s (Separately Adjustable)
Response Time:	0.5 s
Accuracy:	± 0.5 % of f. s. (± 1.0 % of f. s. for Measuring Range: ≤ 30 PSI)
Protection:	IP 65

Order Details (Example: PDA-15 3 N2 P065)

Model	Output	Electrical Connection	Process Connection	Measuring Range (barG)	Measuring Range (PSIG)
PDA-	..15.. = Standard 0(4)-20 mA	..3.. = Plug M12x1	..N2.. = 1/4" NPT	..C315 = -1...0 ..B025 = 0...1 ..B035 = 0...1.6 ..B045 = 0...2.5 ..B055 = 0...4 ..B065 = 0...6 ..B075 = 0...10 ..B085 = 0...16 ..A095 = 0...25 ..A105 = 0...40 ..A115 = 0...60 ..A125 = 0...100 ..A135 = 0...160 ..A145 = 0...250 ..A155 = 0...400	..H315 = -30...0 in. Hg ..P025 = 0...15 ..P045 = 0...30 ..P055 = 0...50 ..P065 = 0...100 ..P075 = 0...150 ..P085 = 0...200 ..P095 = 0...350 ..P105 = 0...600 ..P115 = 0...1000 ..P125 = 0...1450 ..P135 = 0...2300 ..P145 = 0...3600 ..P155 = 0...5800 ..E = Custom*
	..25.. = 0(4)-20 mA, PNP Switch Output		..N4.. = 1/2" NPT	..R2.. = G 1/4	
	..35.. = 0(4)-20 mA, NPN Switch Output		..R4.. = G 1/2		

Accessory: Mating Electrical Cable

*Please specify custom range as a note on your order

Description	Item #
M12 Micro-DC, 4-pin 6 foot Cable	807.037
M12 Micro-DC, 4-pin 16 foot Cable	807.037/5M