





Del TORO



CUSTOM LED, ARCHITECTURAL, HOSPITALITY, AND DECORATIVE LIGHTING CATALOG

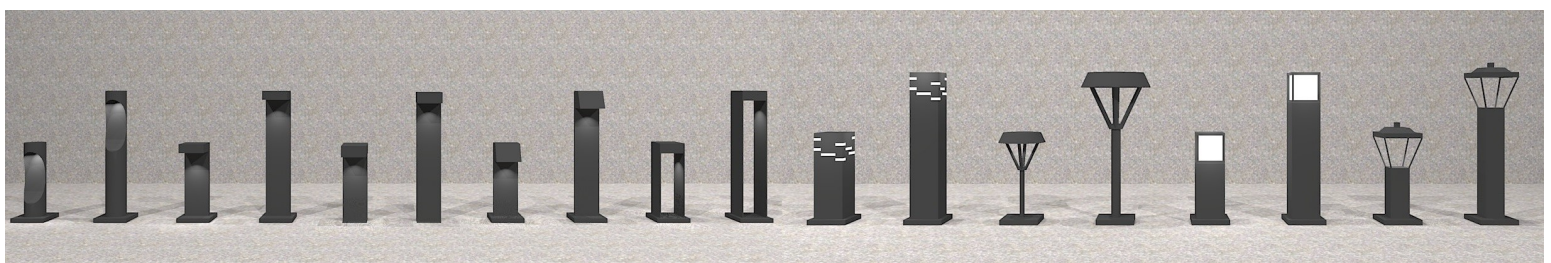


LED & Production Information

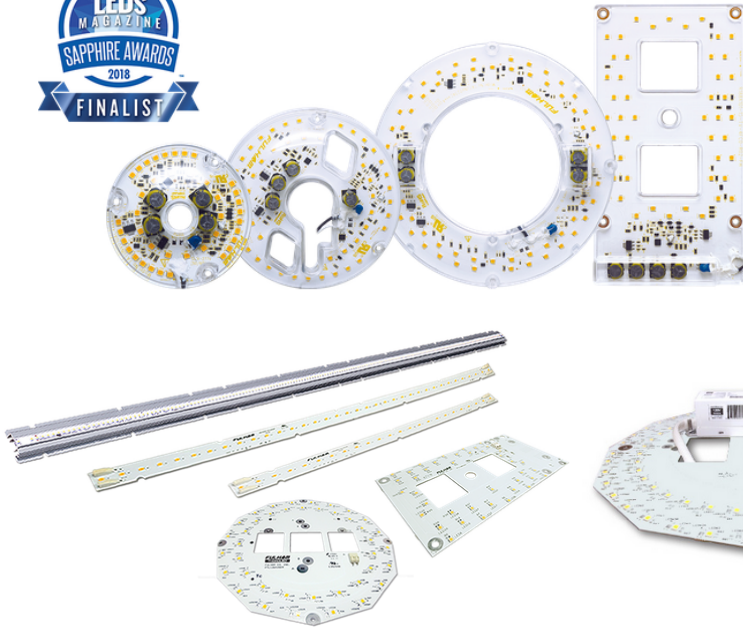

We proudly offer Fulham and Cree LED modules, retrofit kits, and custom configurations to fulfill all of your specification needs. High CRI, lumen output, and Energy star rated components are available throughout our entire catalog.



Custom Laser Cut Design Panel

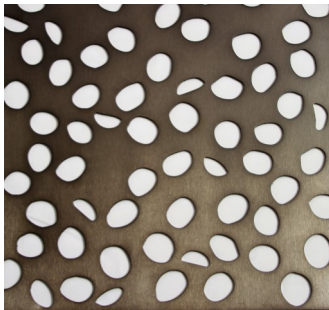

We fabricate all types of decorative fixtures from artwork to furniture. Our factory includes a metal fabrication shop, two large conveyor powder coating systems, and laser cutting. All products are fully customizable, with a large array of design, finish, and diffuser options. Del Toro can be your one stop shop for any and all your decorative fixture design

Custom Drum Planter Design



Ordering Information: Fixture Number + Dimensions + Lamping + Finish + Options or Modifications


Standard Specifications		Finishes		Diffusers		Diffusers	
Material	Brass, Steel, Aluminum	PB	Polished Brass	WA	White Acrylic	LS	Linen Shade
Diffuser	White Acrylic	PC	Polished Chrome	WPC	White Polycarbonate	FS	Felt Shade
Driver	Integrated LED	PU	Polished Copper	FAA	Faux Alabaster	CCS	Custom Color Shade
Voltage	120-277V	VP	Verdigris Patina	SBL	Sandblasted Acrylic	WOG	White Opal Glass
Finish	Powder Coat	WB	Weathered Brass	CA	Clear Acrylic	CG	Clear Glass
Label	UL Listed	SB	Satin Brass	FA	Frosted Acrylic	SG	Seeded Glass
		SC	Satin Chrome	SA	Stained Acrylic	FG	Frosted Glass
		SU	Satin Copper	CCA	Custom Color Acrylic	TG	Tinted Glass
		CC	Custom Color	DBL	Double Bowl	AM	Acoustic Material





Decorative Housing & Double Dome Innovation Designs

Chocolate Linen Laminate

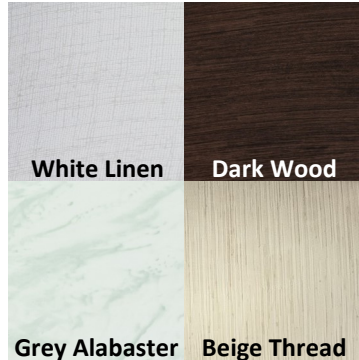


We proudly offer custom acrylic, polycarbonate, and acoustic material configurations to fulfill all of your decorative needs. Laminated acrylic and acoustic materials allow for a large range of designs without sacrificing structural integrity and luxurious appearance. Get the look of fabric with the strength and cleanliness of acrylic.



Acoustic material housing can be fabricated for decorative and lighting purposes. Contact us for viable design options and custom manufacturing capabilities.

Please Contact Us for Laminated and Acoustic Material Color Availability


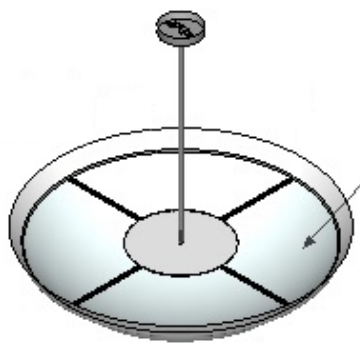


Double Dome Diffuser Innovation


Our Double Dome construction is great for hard to reach, and minimal maintenance settings. The decorative acrylic dome comes with an interior clear dome that reduces shadows cast by dust and debris landing in the housing. Perfect for hospitality settings with high traffic and ceilings.

Ordering Information: Fixture Number + Dimensions + Lamping + Finish + Options or Modifications

Standard Specifications		Finishes		Diffusers		Diffusers	
Material	Brass, Steel, Aluminum	PB	Polished Brass	WA	White Acrylic	LS	Linen Shade
Diffuser	White Acrylic	PC	Polished Chrome	WPC	White Polycarbonate	FS	Felt Shade
Driver	Integrated LED	PU	Polished Copper	FAA	Faux Alabaster	CCS	Custom Color Shade
Voltage	120-277V	VP	Verdigris Patina	SBL	Sandblasted Acrylic	WOG	White Opal Glass
Finish	Powder Coat	WB	Weathered Brass	CA	Clear Acrylic	CG	Clear Glass
Label	UL Listed	SB	Satin Brass	FA	Frosted Acrylic	SG	Seeded Glass
		SC	Satin Chrome	SA	Stained Acrylic	FG	Frosted Glass
		SU	Satin Copper	CCA	Custom Color Acrylic	TG	Tinted Glass
		CC	Custom Color	DBL	Double Bowl	AM	Acoustic Material

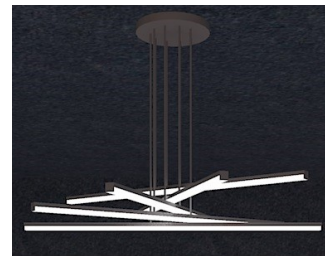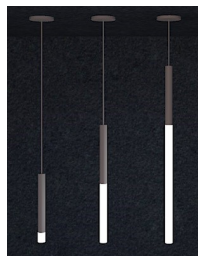

520P—Thin Tube Pendant

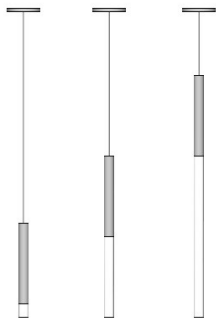


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
1.5"	14"	36"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
1.5"	24"	48"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
1.5"	36"	60"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

305P—Bar Trio Pendant

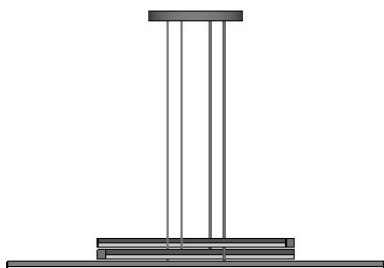


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	4"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

306P—Bar Quintet Pendant

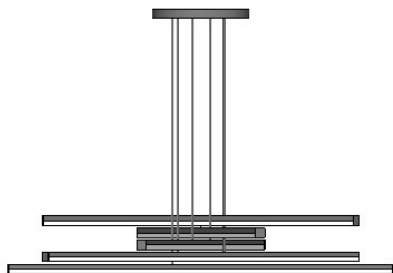

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
48"	9"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color


Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl


Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade



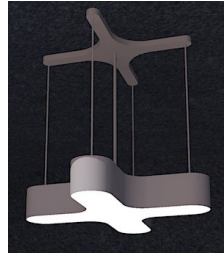

000P—Round Blade Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	4"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

015P—Rounded Cross Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
30"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
36"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

030P—Hexagon Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	3"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	3"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
42"	3"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers


WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
AM	Acoustic Material

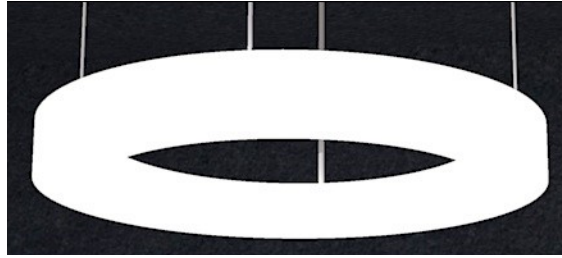

038P—Ring Suspension Pendant

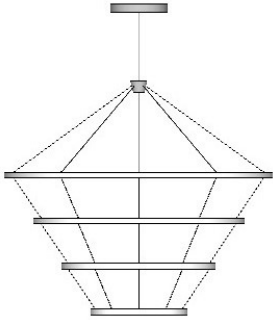

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	2"	36"	Up to 2,500	Up to 50W	2700K-5000K	0-10V
36"	2"	36"	Up to 3,000	Up to 60W	2700K-5000K	0-10V
48"	2"	36"	Up to 5,000	Up to 100W	2700K-5000K	0-10V


Notes:

Stem/Canopy available in a variety of styles .

Ring quantity available in multiple configurations

Fully Customizable

050P—Acrylic Ring Pendant

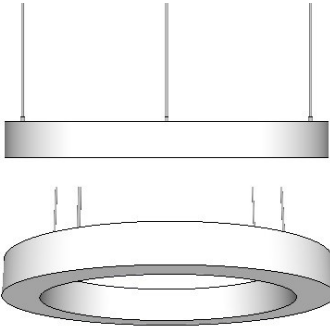


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	5"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC
48"	5"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

530P—Cyclone Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	27"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	33"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	39"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers


WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
AM	Acoustic Material



155W—Blade Insert Wall Sconce




Width	Depth	Height	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	12"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
4"	4"	18"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
4"	4"	24"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV

Notes:

Mount available in a variety of styles .

Fully Customizable

630W—Strapped Wall Sconce




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	3.5"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4"	3.5"	18"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4"	3.5"	24"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Mount available in a variety of styles .

Fully Customizable

635W—Angled Infinity Wall Sconce



Width	Depth	Height	Lumen Output	Wattage	Color Temp	Dimming
4.5"	3"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4.5"	3"	18"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
4.5"	3"	24"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Mount available in a variety of styles .

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers


WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
BG	Beveled Glass

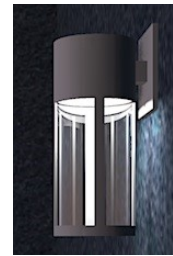

500P—Cylinder Downlit Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	12"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
6"	18"	36"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
8"	24"	36"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

505W—Puck Wall Arm Mount




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	5"	Up to 2,130	Up to 20W	2700K-5000K	TRIAC or ELV
6"	4"	7"	Up to 3,360	Up to 30W	2700K-5000K	TRIAC or ELV
8"	4"	9"	Up to 5,080	Up to 46W	2700K-5000K	TRIAC or ELV

Notes:

Arm Mount available in a variety of styles .

Fully Customizable

515W—Framed Indirect Arm Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
4"	12"	5"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
6"	18"	7"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
8"	24"	9"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

Notes:

Arm Mount available in a variety of styles.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color



Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
BG	Beveled Glass





205P—Framed Ring Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
12"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
18"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	3"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

Notes:

Lower wattage options available for energy efficiency projects.

Fully Customizable

230P—Giant Shade Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	10"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
36"	16"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
44"	24"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC


Notes:

Lamping available in a variety of styles .

Fabric Shade Available in a variety of colors.

Fully Customizable

208P—Star 6 Point Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
30"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

Notes:

Lower wattage options available for energy efficiency projects.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes




PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
AM	Acoustic Material

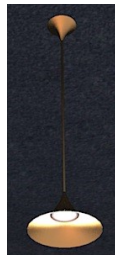

560P—Horn Down-lit Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
12"	12"	36"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
18"	18"	36"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

Notes:

Lamping available in a variety of styles .

Fully Customizable

715P—Rope Hung Globe Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	10"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
36"	16"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
44"	24"	48"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb


Notes:

Lower wattage options available for energy efficiency projects.

Fabric or metal Shade Available in a variety of colors.

Fully Customizable

240P—Fan Shade Pendant

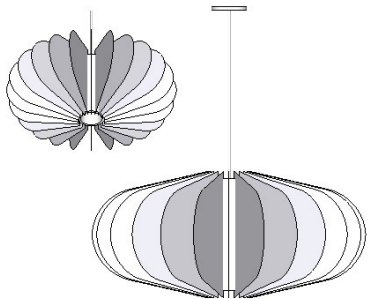

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
24"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb
30"	6"	36"	TBD Bulb	Max 60W	2700K-5000K	TBD Bulb

Notes:

Fabric, Acrylic, or Metal Shade Available in a variety of Styles.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl


Diffusers

LS	Linen Shade
FS	Felt Shade
AM	Acoustic Material





200P—Framed Box Pendant



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
12"	19"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb
16"	24"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb
20"	20"	36"	TBD Bulb	Max 60W Each	2700K-5000K	TBD Bulb

Notes:

Lower wattage options available for energy efficiency projects.

Fabric or Metal Housing Available in a variety of styles.

Fully Customizable

221P—Framed Column Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
10"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	28"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	36"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC


Notes:

Lamping available in a variety of styles.

Fabric or Metal Housing Available in a variety of styles.

Fully Customizable

221W—Fancy Framed Arm Mount

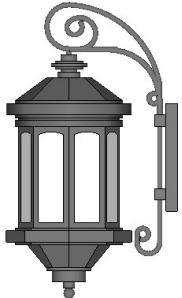

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
10"	14"	26"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	16"	30"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	20"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Fabric, Acrylic, or Metal Shade Available in a variety of Styles.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers


WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
BG	Beveled Glass

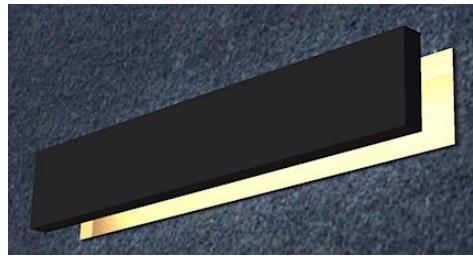

106P—Cascading Tile Pendant

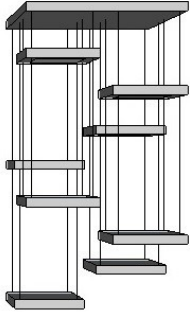


Width	Depth	OAH	Lumens/Tile	Wattage/Tile	Color Temp	Dimming
4"	4"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
8"	4"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
16"	16"	36"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

300P—Plank Pendant

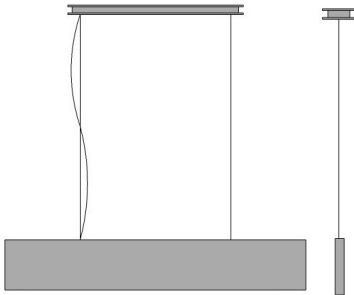


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	8"	48"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

300W—Plank Wall Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
48"	8"	4"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Wall Mount available in a variety of styles .

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed



Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color


Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
AM	Acoustic Material
DBL	Double Bowl



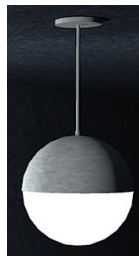

700P—Globe Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
18"	18"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	24"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
30"	30"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

715W—Ceiling Mount

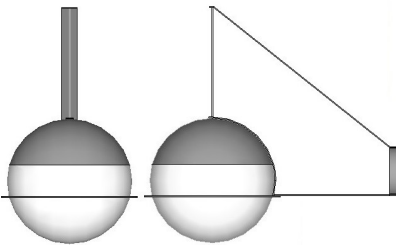


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
6"	12"	12"	Up to 1,065	Up to 10W	2700K-5000K	TRIAC or ELV
8"	16"	16"	Up to 1,680	Up to 15W	2700K-5000K	TRIAC or ELV
10"	20"	20"	Up to 2,540	Up to 23W	2700K-5000K	TRIAC or ELV

Notes:

Wall Mount available in a variety of styles .

Fully Customizable

412W—Wall or Ceiling Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
10"	10"	7.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
14"	14"	10"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
18"	18"	21"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Accent bars available in a variety of styles.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color


Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl


Diffusers

WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass



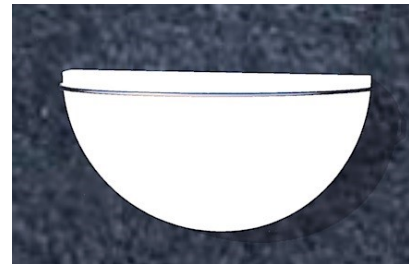

400P—Bowl Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	10"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

400C—Ceiling Mount

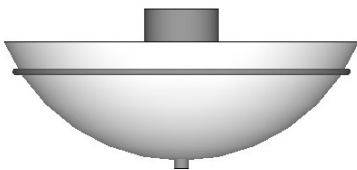

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	24"	8"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	30"	9"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	36"	10"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Standoff available in a variety of styles .

Fully Customizable

400W—Wall Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
12.5"	6"	4.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
12.5"	6"	6.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
16.5"	8"	8.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Top Lens also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl


Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
AM	Acoustic Material





810P—Framed Cone Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
24"	9"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

810C—Ceiling Mount

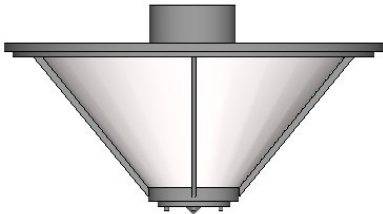


Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	12"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
24"	9"	12"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	12"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Standoff available in a variety of styles .

Fully Customizable

810W—Wall Mount

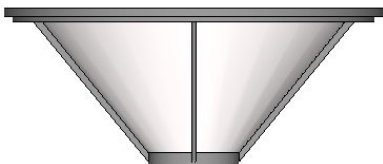

Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
21"	9"	10.5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	9"	12"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
30"	9"	15"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Top Lens also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes



PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers


WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
AM	Acoustic Material

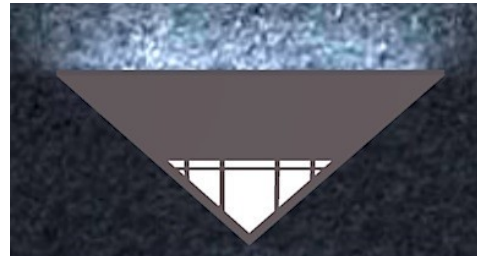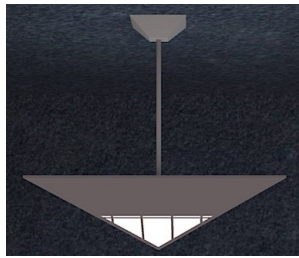

910P—Framed Pyramid Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	6"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
25"	7.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

910C—Ceiling Mount




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
20"	6"	9"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
25"	7.5"	10.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
30"	9"	12"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Standoff available in a variety of styles .

Fully Customizable

910W—Wall Mount



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
12"	6"	4"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
18"	8"	5"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
24"	12"	6"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Top Lens also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
AM	Acoustic Material



510P—Acrylic Cylinder Pendant




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	24"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	24"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

550W—Shield Wall Sconce




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
10"	12"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	14"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
14"	16"	5"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Top & Bottom Lens also available.

Fully Customizable

500W—Half Cylinder Wall Sconce



Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
7"	16"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
7"	20"	5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
9"	24"	5"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Top & Bottom Lens also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed


Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color


Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
AM	Acoustic Material
DBL	Double Bowl



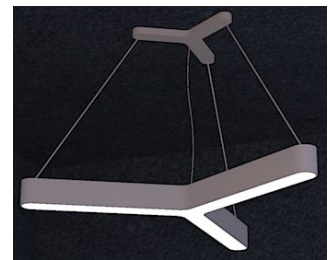

860P—Vapor Glass Pendant

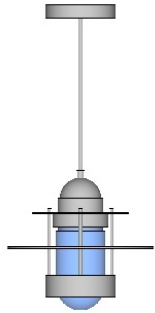

Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
10.5"	10"	24"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
10.5"	10"	36"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC
10.5"	10"	48"	Up to 2,460	Up to 16.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem/Canopy available in a variety of styles .

Fully Customizable

750C—Shade Surface Mount




Width	Height	Depth	Lumen Output	Wattage	Color Temp	Dimming
8"	6"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	8"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	9"	36"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Diffusers/Mounts available in a variety of styles.

Fully Customizable

016P—TriArm Pendant



Width	Height	OAH	Lumen Output	Wattage	Color Temp	Dimming
24"	3.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
36"	3.5"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
46"	3.5"	48"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Stem and Cable options also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes


PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
AM	Acoustic Material



220C—Hexagon Flush Mount




Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
16"	16"	4"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Multiple Lens options also available.

Fully Customizable

905C—Pyramid Flush Mount

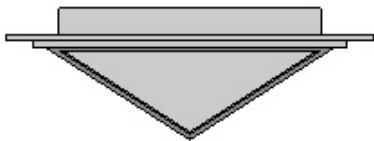


Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	18"	6"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Multiple Lens options also available.

Fully Customizable

211C—Accent Box Flush Mount



Width	Length	Height	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
12"	12"	4.5"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
18"	18"	6"	Up to 14,760	Up to 100.8W	2700K-5000K	0-10V or TRIAC

Notes:

Multiple Lens options also available.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color


Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers

LS	Linen Shade
FS	Felt Shade
CCS	Custom Color Shade
WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
AM	Acoustic Material





605L—Window Bar Bollard




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	4"	36"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
6"	6"	42"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC
8"	8"	48"	Up to 4,920	Up to 33.6W	2700K-5000K	0-10V or TRIAC

Notes:

Mounting available in a variety of styles.

Fully Customizable

111L—Hammer Pathway




Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
4"	8"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	10"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
6"	12"	36"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Mounting available in a variety of styles.

Fully Customizable

610L—Infinity Pathway



Width	Depth	OAH	Lumen Output	Wattage	Color Temp	Dimming
8"	8"	18"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	8"	24"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC
8"	8"	30"	Up to 7,380	Up to 50.4W	2700K-5000K	0-10V or TRIAC

Notes:

Mounting available in a variety of styles.

Fully Customizable

Standard Specifications

Material	Brass, Steel, Aluminum
Diffuser	White Acrylic
Driver	Integrated LED
Voltage	120-277V
Finish	Powder Coat
Label	UL Listed

Finishes

PB	Polished Brass
PC	Polished Chrome
PU	Polished Copper
VP	Verdigris Patina
WB	Weathered Brass
SB	Satin Brass
SC	Satin Chrome
SU	Satin Copper
CC	Custom Color

Diffusers

WA	White Acrylic
WPC	White Polycarbonate
FAA	Faux Alabaster
SBL	Sandblasted Acrylic
CA	Clear Acrylic
FA	Frosted Acrylic
SA	Stained Acrylic
CCA	Custom Color Acrylic
DBL	Double Bowl

Diffusers


WOG	White Opal Glass
CG	Clear Glass
SG	Seeded Glass
FG	Frosted Glass
TG	Tinted Glass
BG	Beveled Glass





LED Sample Diagram Layouts

Rounded Cross Pendants LED Layout

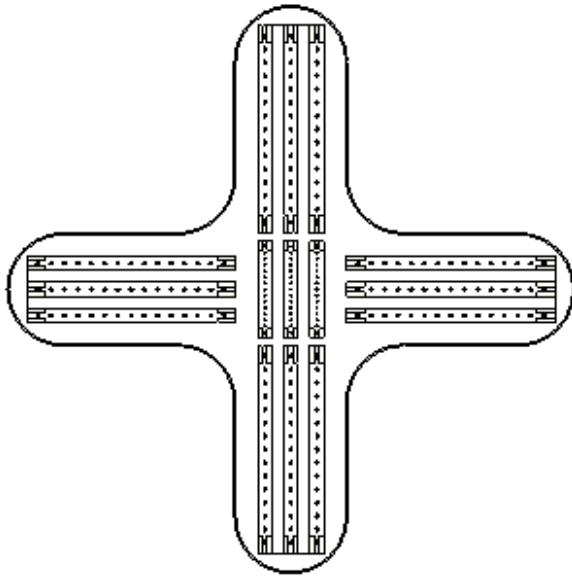

We take pride in quality craftsmanship.

Focusing on light leakage prevention and hot spot reduction is a large part of manufacturing the best fixtures possible. Our goal is to create picturesque designs for every project.



Please contact us with any questions about custom LED layout and design.


We have a large variety of LED package configurations available.

Kit#	Lumen Output	Wattage	Dimming
LEDAC1	1,065	10W	TRIAC/ELV
LEDAC2	1,680	15W	TRIAC/ELV
LEDAC3	1,724	15W	TRIAC/ELV
LEDAC4	2,540	23W	TRIAC/ELV
LEDAC5	3,685	34W	TRIAC/ELV
LEDRD7	1,450	13W	0-10V or TRIAC
LEDRD9	2,900	25W	0-10V or TRIAC
LEDRD10	8,700	65W	0-10V or DALI
LEDHRD	1,450	13W	0-10V or TRIAC
LEDREC	1,450	13W	0-10V or TRIAC

Package#	Lumen Output	Wattage	Dimming
LED1	1,230	8.4W	0-10V or TRIAC
LED2	2,460	16.8W	0-10V or TRIAC
LED3	3,225	21.3W	0-10V
LED4	4,920	33.6W	0-10V
LED6	7,380	50.4W	0-10V
LED8	9,840	67.2W	0-10V
LED10	13,520	89W	0-10V
LED12	14,760	100.8W	0-10V
LED22	34,800	224.7W	0-10V
LED44	35,840	217.4W	0-10V

LED Sample Diagram Layouts

Ring Pendants LED Layout

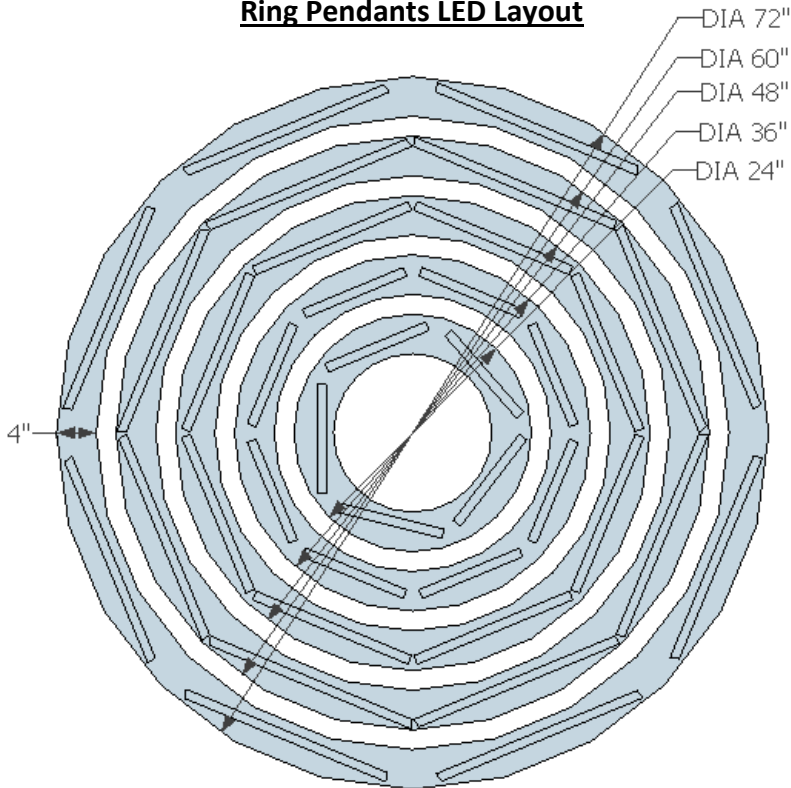


We take pride in quality craftsmanship.

Focusing on light leakage prevention and hot spot reduction is a large part of manufacturing the best fixtures possible. Our goal is to create picturesque designs for every project.



Please contact us with any questions about custom LED layout and design.

We have a large variety of LED configurations available.

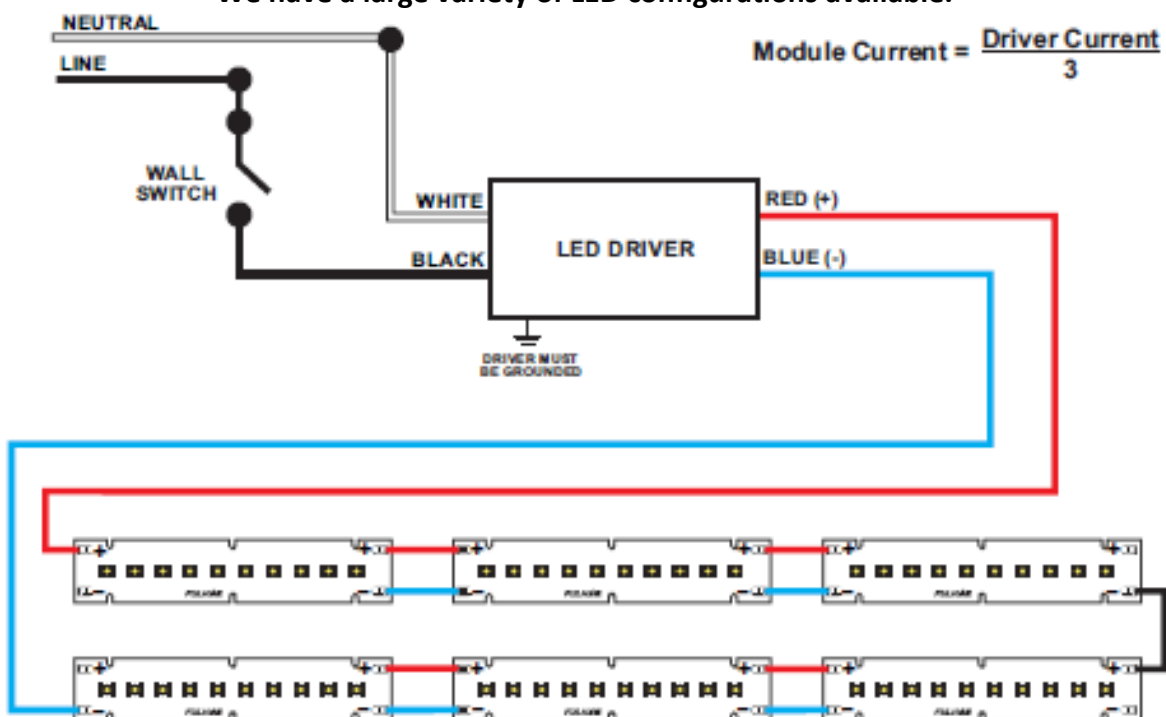



Terms & Conditions of Sale

TERMS OF SALE: 30 days net, F.O.B. Del Toro Lighting Alhambra California Lamps are not included, unless otherwise noted. Minimum orders of \$100. All delinquent accounts will be charged 1.5 percent per month, 18 percent per year.

ORDERS: All purchase orders are subject to acknowledgment and acceptance by Del Toro Lighting. We will rely on customers' purchase orders being complete and accurate in every detail, authorized and endorsed. This original authorization shall then be forwarded to Del Toro Lighting for our records. All orders must be placed on, or confirmed by the customer's order form, including all details to which the order is subject by customer's request. However, any statements or printing on the customer's orders are accepted subject to our published terms and conditions unless we agree to a specific deviation in writing from Del Toro Lighting. All orders for special or custom-made equipment are not subject to cancellation once received by Del Toro Lighting. Upon the acceptance of any order, we will not be responsible for conforming to any plans and specifications unless they accompany their original order and are accepted as such. All orders taken by the sales representative shall be subject to acceptance by Del Toro Lighting. Specifications either contained in Del Toro's catalog, promotional literature or special application drawings are subject to change without notice or liability to Del Toro Lighting. Del Toro Lighting reserves the right at all times to reject any order, whether because of the unsatisfactory credit rating of the customer or for any reason whatsoever.

LIABILITY: Shipment date noted on our acknowledgment, if any, is Del Toro Lighting's best approximation of probable shipment date, and shall not be deemed to represent a fixed or guaranteed shipment date. Del Toro Lighting will not be held liable for late delivery and or inability to perform thereunder caused by any contingency beyond its control, including, without limitation, strikes, riots, wars, accidents, fires floods disasters, inability to obtain materials essential to the manufacture of the products covered hereby, or governmental or other limitation or restrictions on material, labor manufacturing, delivery or shipping.

FREIGHT TERMS: Del Toro lighting will pay freight costs for merchandise shipped within the Continental United States on orders of \$2,500 or more, with exception of California, wherein Del Toro Lighting will cover shipping costs on orders of \$1,500 or more. Although we will comply with special carrier requests whenever practical, we reserve the right to make the final decision with regard to all shipments. Del Toro Lighting's responsibility ceases upon acceptance of merchandise by carrier. All claims for loss or damage in transit must be made by consignee against carrier, but we will render every aid and assistance in the presentation and enforcement of such claims without waiver of our rights to have compliance with terms for payments of our invoices. Del Toro Lighting will not pay for drop shipments outside distributor's sales area or territory, or for air freight.

RETURNS: All merchandise returned without our written consent will not be accepted. All returned goods are subject to prior approval and must be accompanied by a returned goods authorization number. (RGA) obtained only through the local manufacturer's representative and issued by Del Toro Lighting. Return requests must be made within 60 days of the date of invoice and returned within 30 days of an issuance of an RGA. Only an estimate of the credit can be given upon the requesting of a return. All returned merchandise would be subject to inspection to arrive at a credit value. Special, modified, or discontinued fixtures will not be accepted for a return.

CANCELATIONS OF ORDERS: All cancellations must be made in writing. Released standard product orders cancelled within four weeks of acknowledged shipment date carry up to a fifty percent cancellation charge. No custom or modifications orders may be cancelled after release of order.

WARRANTIES: Del Toro lighting warrants that the products manufactured by it shall be free from defects in material and workmanship for one (1) year from the date of shipment. On components furnished by Del Toro Lighting, but manufactured by others, a written warranty of the manufacturer, if any, will be assigned to the buyer. Del Toro Lighting does not adopt, and does not warrant, or represent, any such component parts or the enforceability of such third party type warranties. Del Toro Lighting's sole obligation under this warranty shall be, at its option, to repair and replace its defective product. There are no other expressed warranties, including any warranty of merchantability or fitness for purpose. Del Toro Lighting shall not be liable for consequential damages or costs for removal and reinstallation of its products. Buyer shall pay for all shipping charges to and from Del Toro Lighting's plant in Alhambra, California for the return and repair and replacement of the product. This warranty shall not apply to defects or damage caused by shipping, improper installation, improper use or abuse of the product.

AUXILIARY EQUIPMENT: Ballasts or transformers, furnished as components with our products carry the warranties of the manufacturer of that equipment. Del Toro Lighting's warranty does not extend to such components. Defective ballasts or transformers under warranty are to be delivered by the user to the manufacturer's designated service distributor for replacement in accordance with their standard terms.

The liability of Del Toro Lighting or any sales representative or distributor on all claims of any kind for any loss or damage arising out of or resulting from or concerning any aspect of this limited warranty, or from the products or services furnished, shall not exceed the price of the specific product which gives rise to the claims.

NETTERMS: NET 30 days from date of invoice.

FREIGHT: Shipping is FOB our plant. No minimum order charge. Full freight is allowed on orders over **\$1,500.00** if invoice paid **30** days.

DROP SHIP: ADD **\$10.00** for UPS or **\$45.00** for truck drop ship. Charges are not deductible. Call before delivery for truck is **\$45.00** and charges are not deductible.

RETURNS: No returns are allowed without written authorization. Restocking charge is **25%**.

PRICES: Prices and specifications are subject to change without written notice.

WARRANTY: Del Toro Lighting warrants to the purchaser for resale only that its products are free from defects in material and workmanship. Del Toro Lighting obligation is expressly limited to repair or replacement at its option without charge at the company's factory within a period of one year from the date of shipment. Del Toro Lighting is not responsible for any installation charges or chargeback's for installation.

Custom Lighting, Furniture, & Decorative Fixtures



Coast to Coast Metal Finishing DBA Del Toro Lighting has been providing high quality decorative fixtures for over 40 years.

Lighting, furniture, and decorative metal fixtures are all manufactured in Southern California. Feel free to contact us for any of your manufacturing needs.