


“THE BRIDGE”

The adjustable access platform that goes over and above.

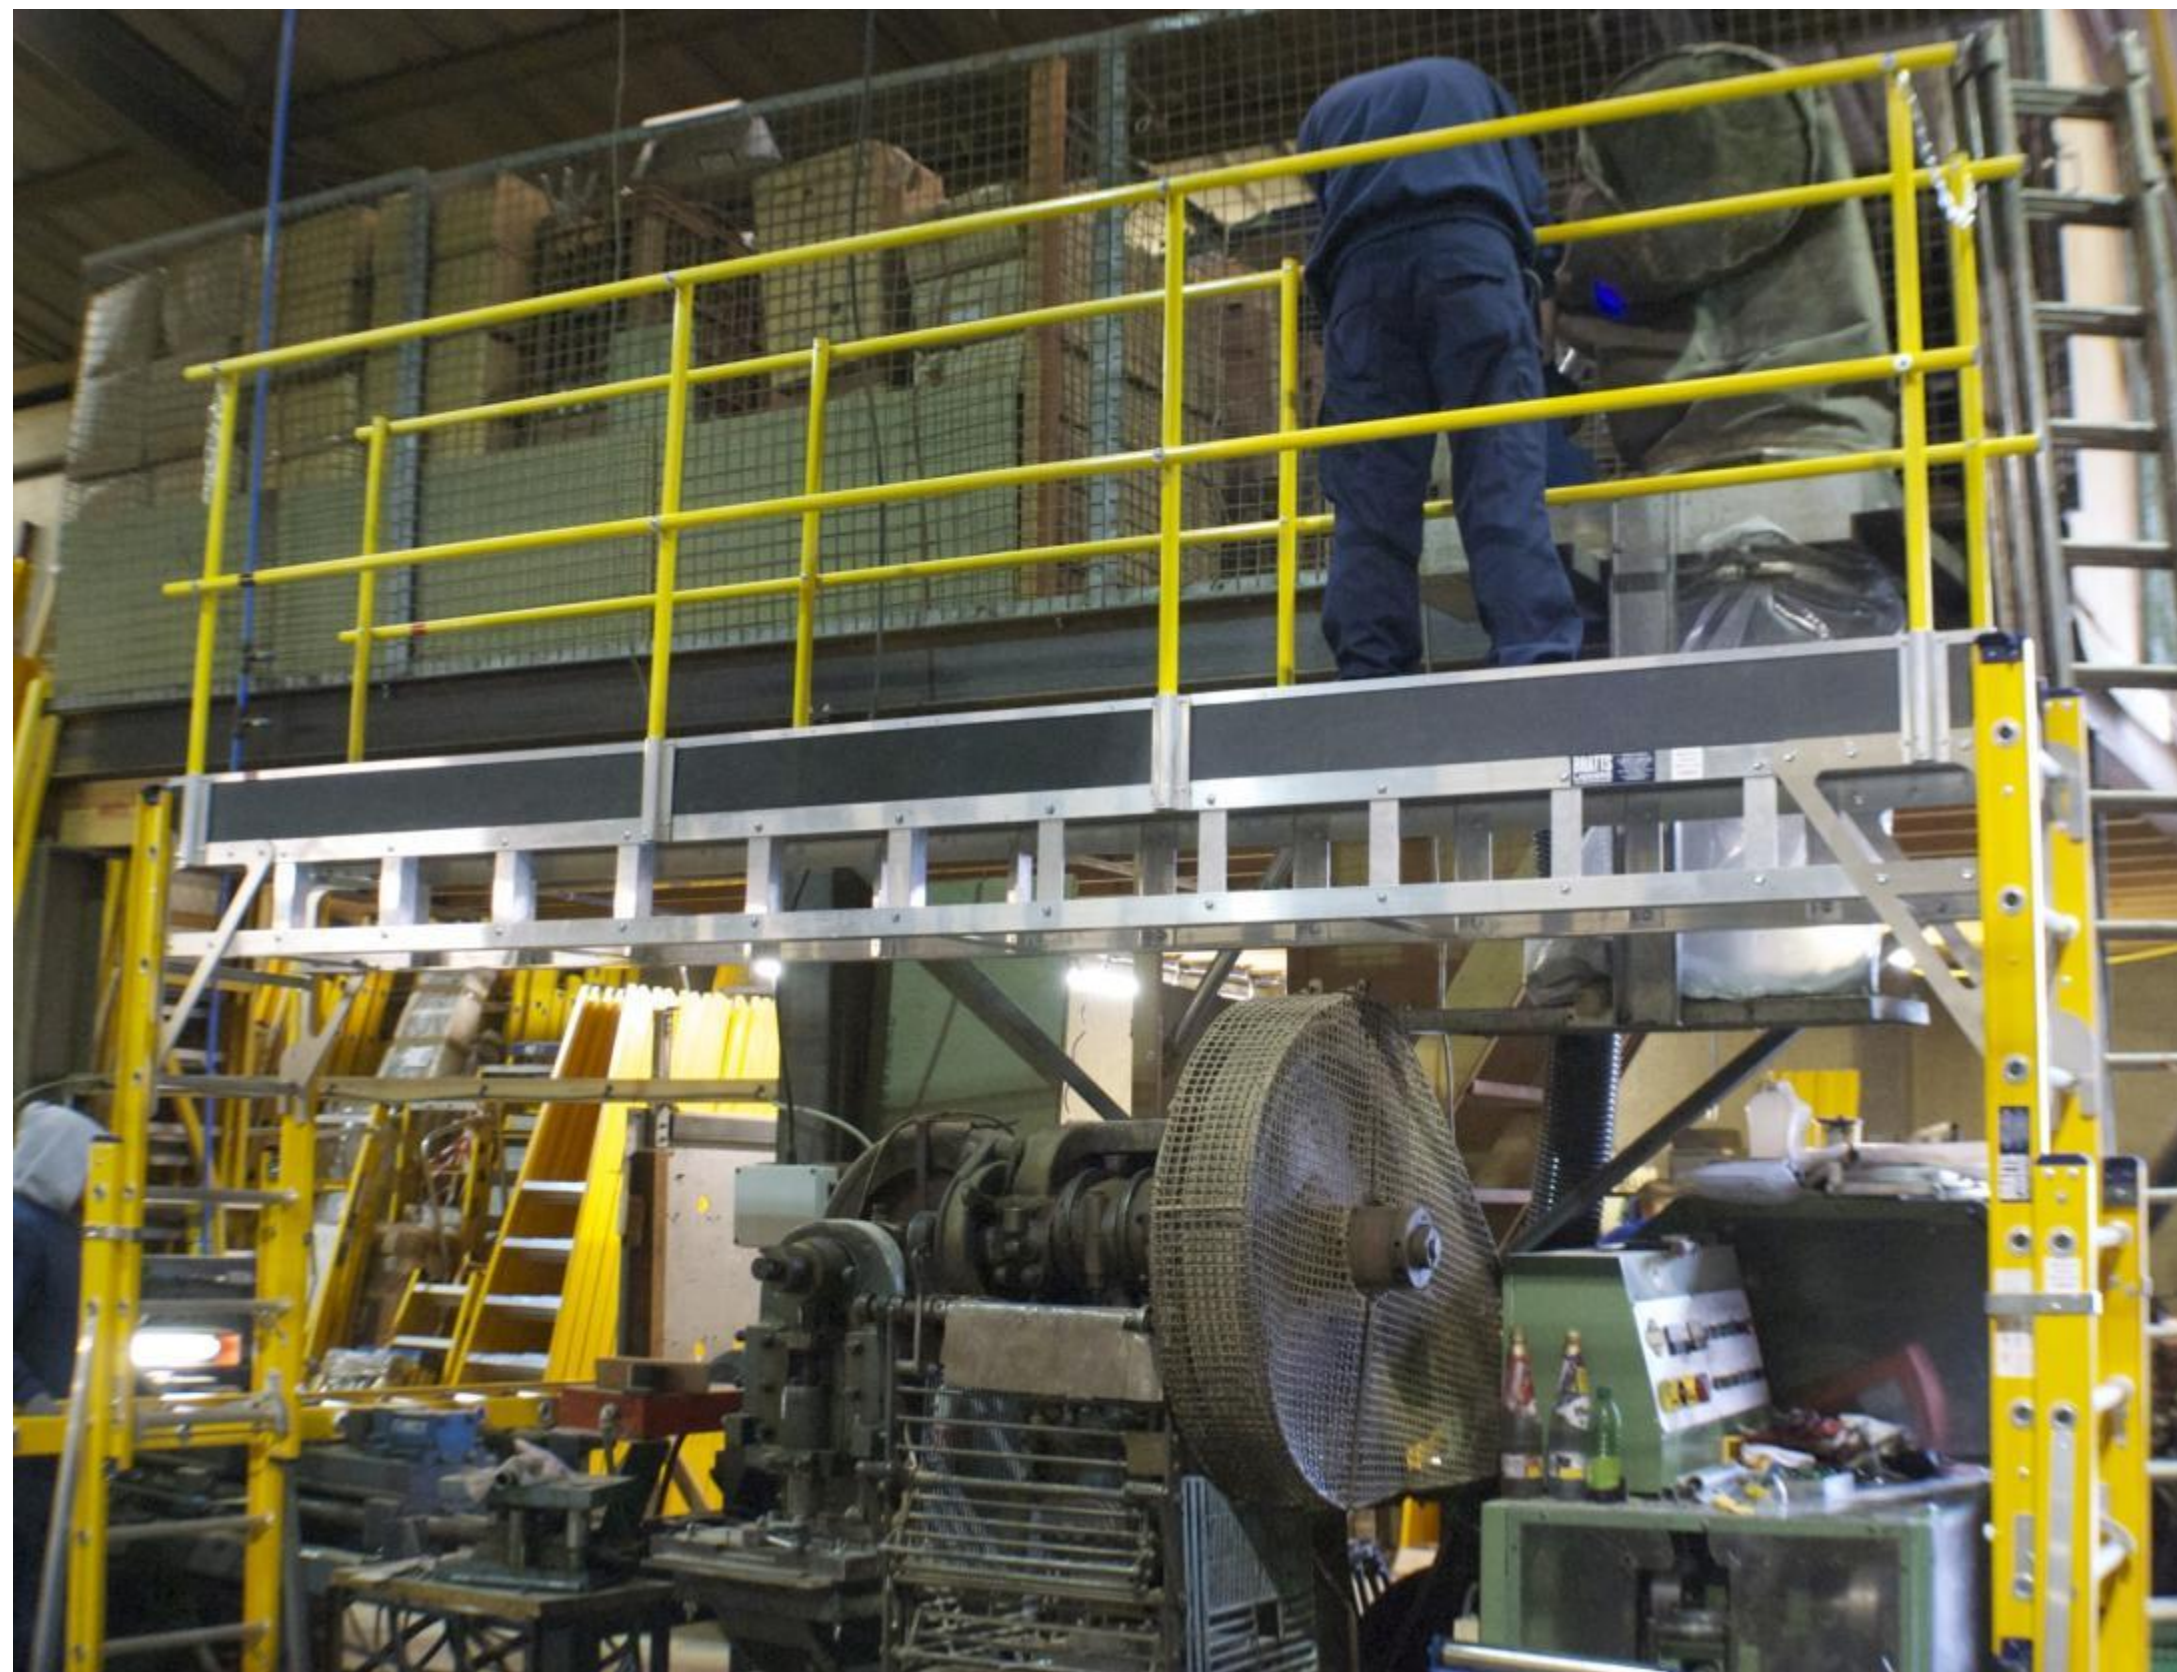

Setting Up

There are 5 components that make up The Bridge.

1 platform

2 handrails

2 base extension ladders



STEP 1

1. LAY THE PLATFORM ON THE GROUND WITH THE HOOK BRACKETS ON THE GROUND.



2. SLIDE THE HANDRAILS THROUGH THE KICK BOARD HANDRAIL HOLDERS AND THEN INSERT THE HANDRAILS INTO THE PLATFORMS HANDRAIL HOLDERS, THE HANDRAILS CAN BE ADJUSTED USING THE “R” CLIP TO SUIT THE HEIGHT REQUIRED E.G. AT LOWEST POINT WHEN UP AGAINST CEILINGS. THE HANDRAILS ARE SET AT HIGHEST POINT WHEN LEVEL WITH THE BOTTOM OF THE PLATFORMS HANDRAIL HOLDERS.(DO NOT EXCEED)



STEP 2


USING TWO PEOPLE LIFT THE PLATFORM ON TO THE BASE LADDERS, THE PLATFORM CAN BE FITTED TO THE TOP OF THE BOTTOM SECTION FOR ITS LOWEST POSITION OR ITS STANDARD POSITION IS ON THE TOP OF THE TOP SECTION AS PER PICTURE. ENSURE THAT THE HOOK BRACKETS ARE FULLY LOCATED BEFORE USE AND THE SHOOT BOLTS BELOW THE PLATFORM DECK ARE ENGAGED.



STEP 3

ADJUST THE PLATFORM HEIGHT TO THE CORRECT HEIGHT BY UNLATCHING THE LOCKING MECHANISM AND RAISING OR LOWERING TO THE APPROPRIATE RUNG. ENSURE THE LOCKING MECHANISM IS FULLY RE-LOCATED.

THEN ADJUST THE HANDRAILS TO THE CORRECT HEIGHT.

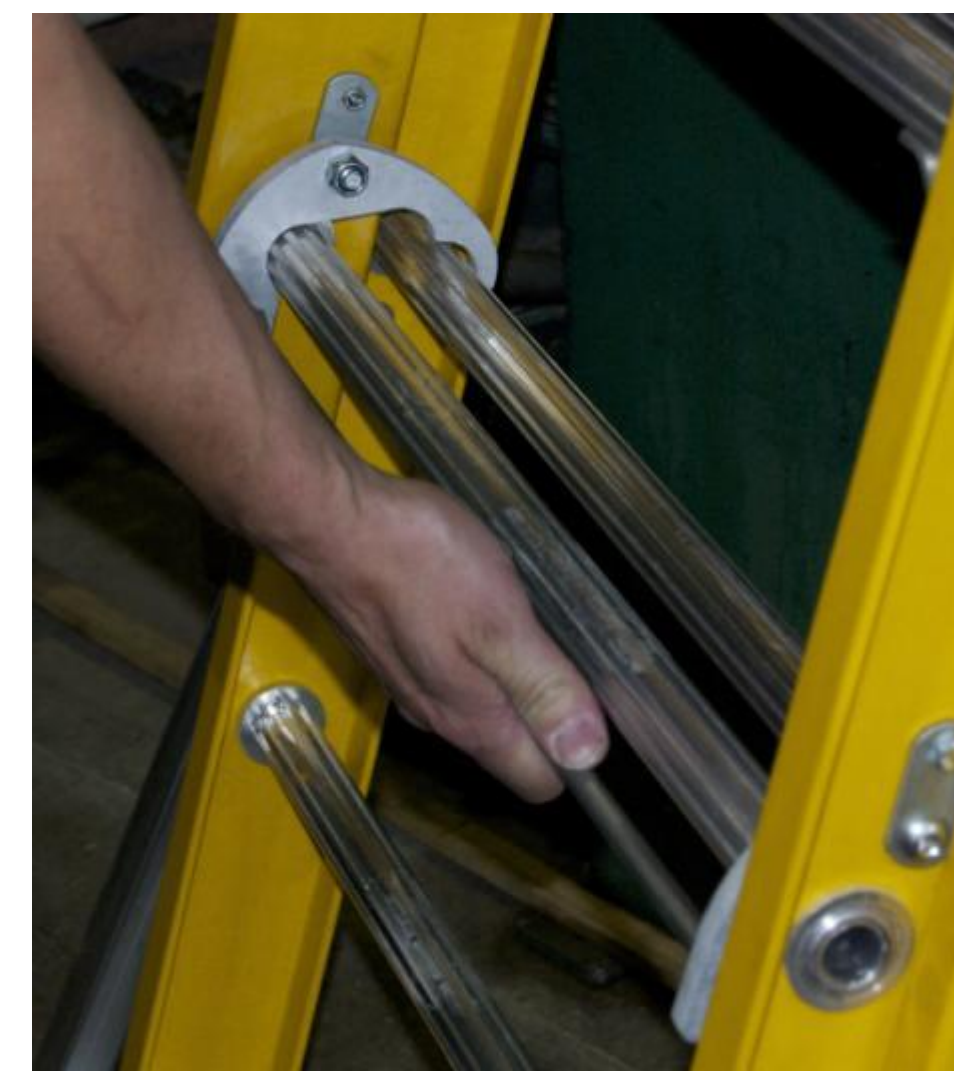

PLEASE NOTE THAT ON PLATFORMS WITH VERTICAL CONTROL HOOK ARMS THE TWO DOUBLE END LADDERS SHOULD BE POSITIONED WITH THE TOP SECTION FACING INWARDS TO ALLOW EASE OF CLIMBING.

DO'S AND DO NOT'S

- NEVER USE THE PLATFORM WITHOUT THE HANDRAILS IN PLACE AND ADJUSTED CORRECTLY
- NEVER OVER REACH.
- NEVER USE THE PLATFORM WITHOUT THE LOCKING MECHANISM OR THE HOOK BRACKETS FULLY AND CORRECTLY IN POSITION.
- THIS PLATFORM IS DESIGNED IN ACCORDANCE WITH THE RELEVANT STANDARDS AND SPECIFICATIONS AND AS SUCH HAS MAXIMUM VERTICAL STATIC LOADS (please see labelling on the product). WE WOULD ADVISE YOU DO YOUR OWN RISK ASSESSMENT AND METHOD STATEMENT TO ENSURE SAFE USE.



