

PROXIMITY


Reader

Access Terminal



Amano McGann Proximity Readers ensure fast and convenient parking access and egress with up to a 10-inch read range standard. Cards may be presented to the reader at any angle while maintaining speed and accuracy. Non-contact proximity antenna operates reliably indoors or out with minimal maintenance. Audio/visual indicators provide active feedback to patron when a card is presented. Used with Amano McGann Software, these readers are ideal for monthly contract, temporary, visitor, hotel, valet, debit, and credit card on-file applications.

Reader
PROXIMITY

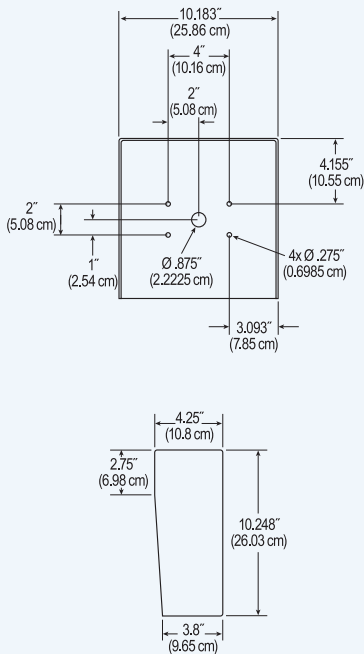

FEATURES

- Micro-controller technology ◀
- 1000 transaction off-line buffer ◀
- Real-time clock with battery backup ◀
- Up to 10' read range, extended range option available ◀
- Automatic switching to stand-alone mode if communications are interrupted ◀
- Built-in diagnostics reports reader performance ◀
- Remote control of gates and peripheral device from Amano McGann Software ◀
- Hard, soft, true or timed anti-passback ◀
- Audible tone and visual LED card read indicator ◀
- Proprietary-encoding format restricts badge counterfeiting ◀
- Reader can accommodate 65,000 to 1 million card IDs based on format ◀
- Optional 2-line (20 character/line) LCD display w/LED backlight ◀
- Optional intercom ◀

STANDARD CONFIGURATION

PROXIMITY

- Amano McGann Format (Indala) Amano McGann Format (HID)

CONTROLLER BOX

- Standard Gate Mount

OPTIONS

PROXIMITY CUSTOM FORMAT/TYPE

- Indala-S Indala-M Indala-E HID-S
 HID-M HID-E Other _____

DISPLAY OPTION

- Standard Display: 2-Line/40 Character 3.2"W x .7"H
(Character Size .13"W x .22"H)
 Large Display: 2-Line/40 Character 5.5"W x .75"H
(Character Size .24"W x .38"H)

INTERCOM OPTION

- Std. Intercom Speaker/Button Custom Dial-up Custom _____

FIRMWARE

- Standard Custom _____

ENCLOSURE

- Standard 10x10 Custom _____

ENCLOSURE COLOR

- White Silver Custom _____

ENCLOSURE GRAPHICS

- Standard Custom _____

SPECIFICATIONS

ENCLOSURE

10"L x 10"H x 4.25"D

WEIGHT

8 lb. (approx)

POWER

120 VAC (12 VAC 800mA) power supply Optional heater supply

MOUNTING

Pedestal, wall mount, or counter mount

ENVIRONMENT

Operating Temperature: -20° to 140°F/-30° to 60°C

Humidity: 95% non-condensing

READER TECHNOLOGY

Proximity

SERVICE ACCESS

Front panel security screws for technician access

Specifications are approximate and are subject to change without notice.

REPRESENTED BY:

AMANO McGANN®

Corporate Headquarters 651 Taft Street NE, Minneapolis, MN 55413
Tel: (612) 331-2020 www.amanomcgann.com