


The Destructor S/C™

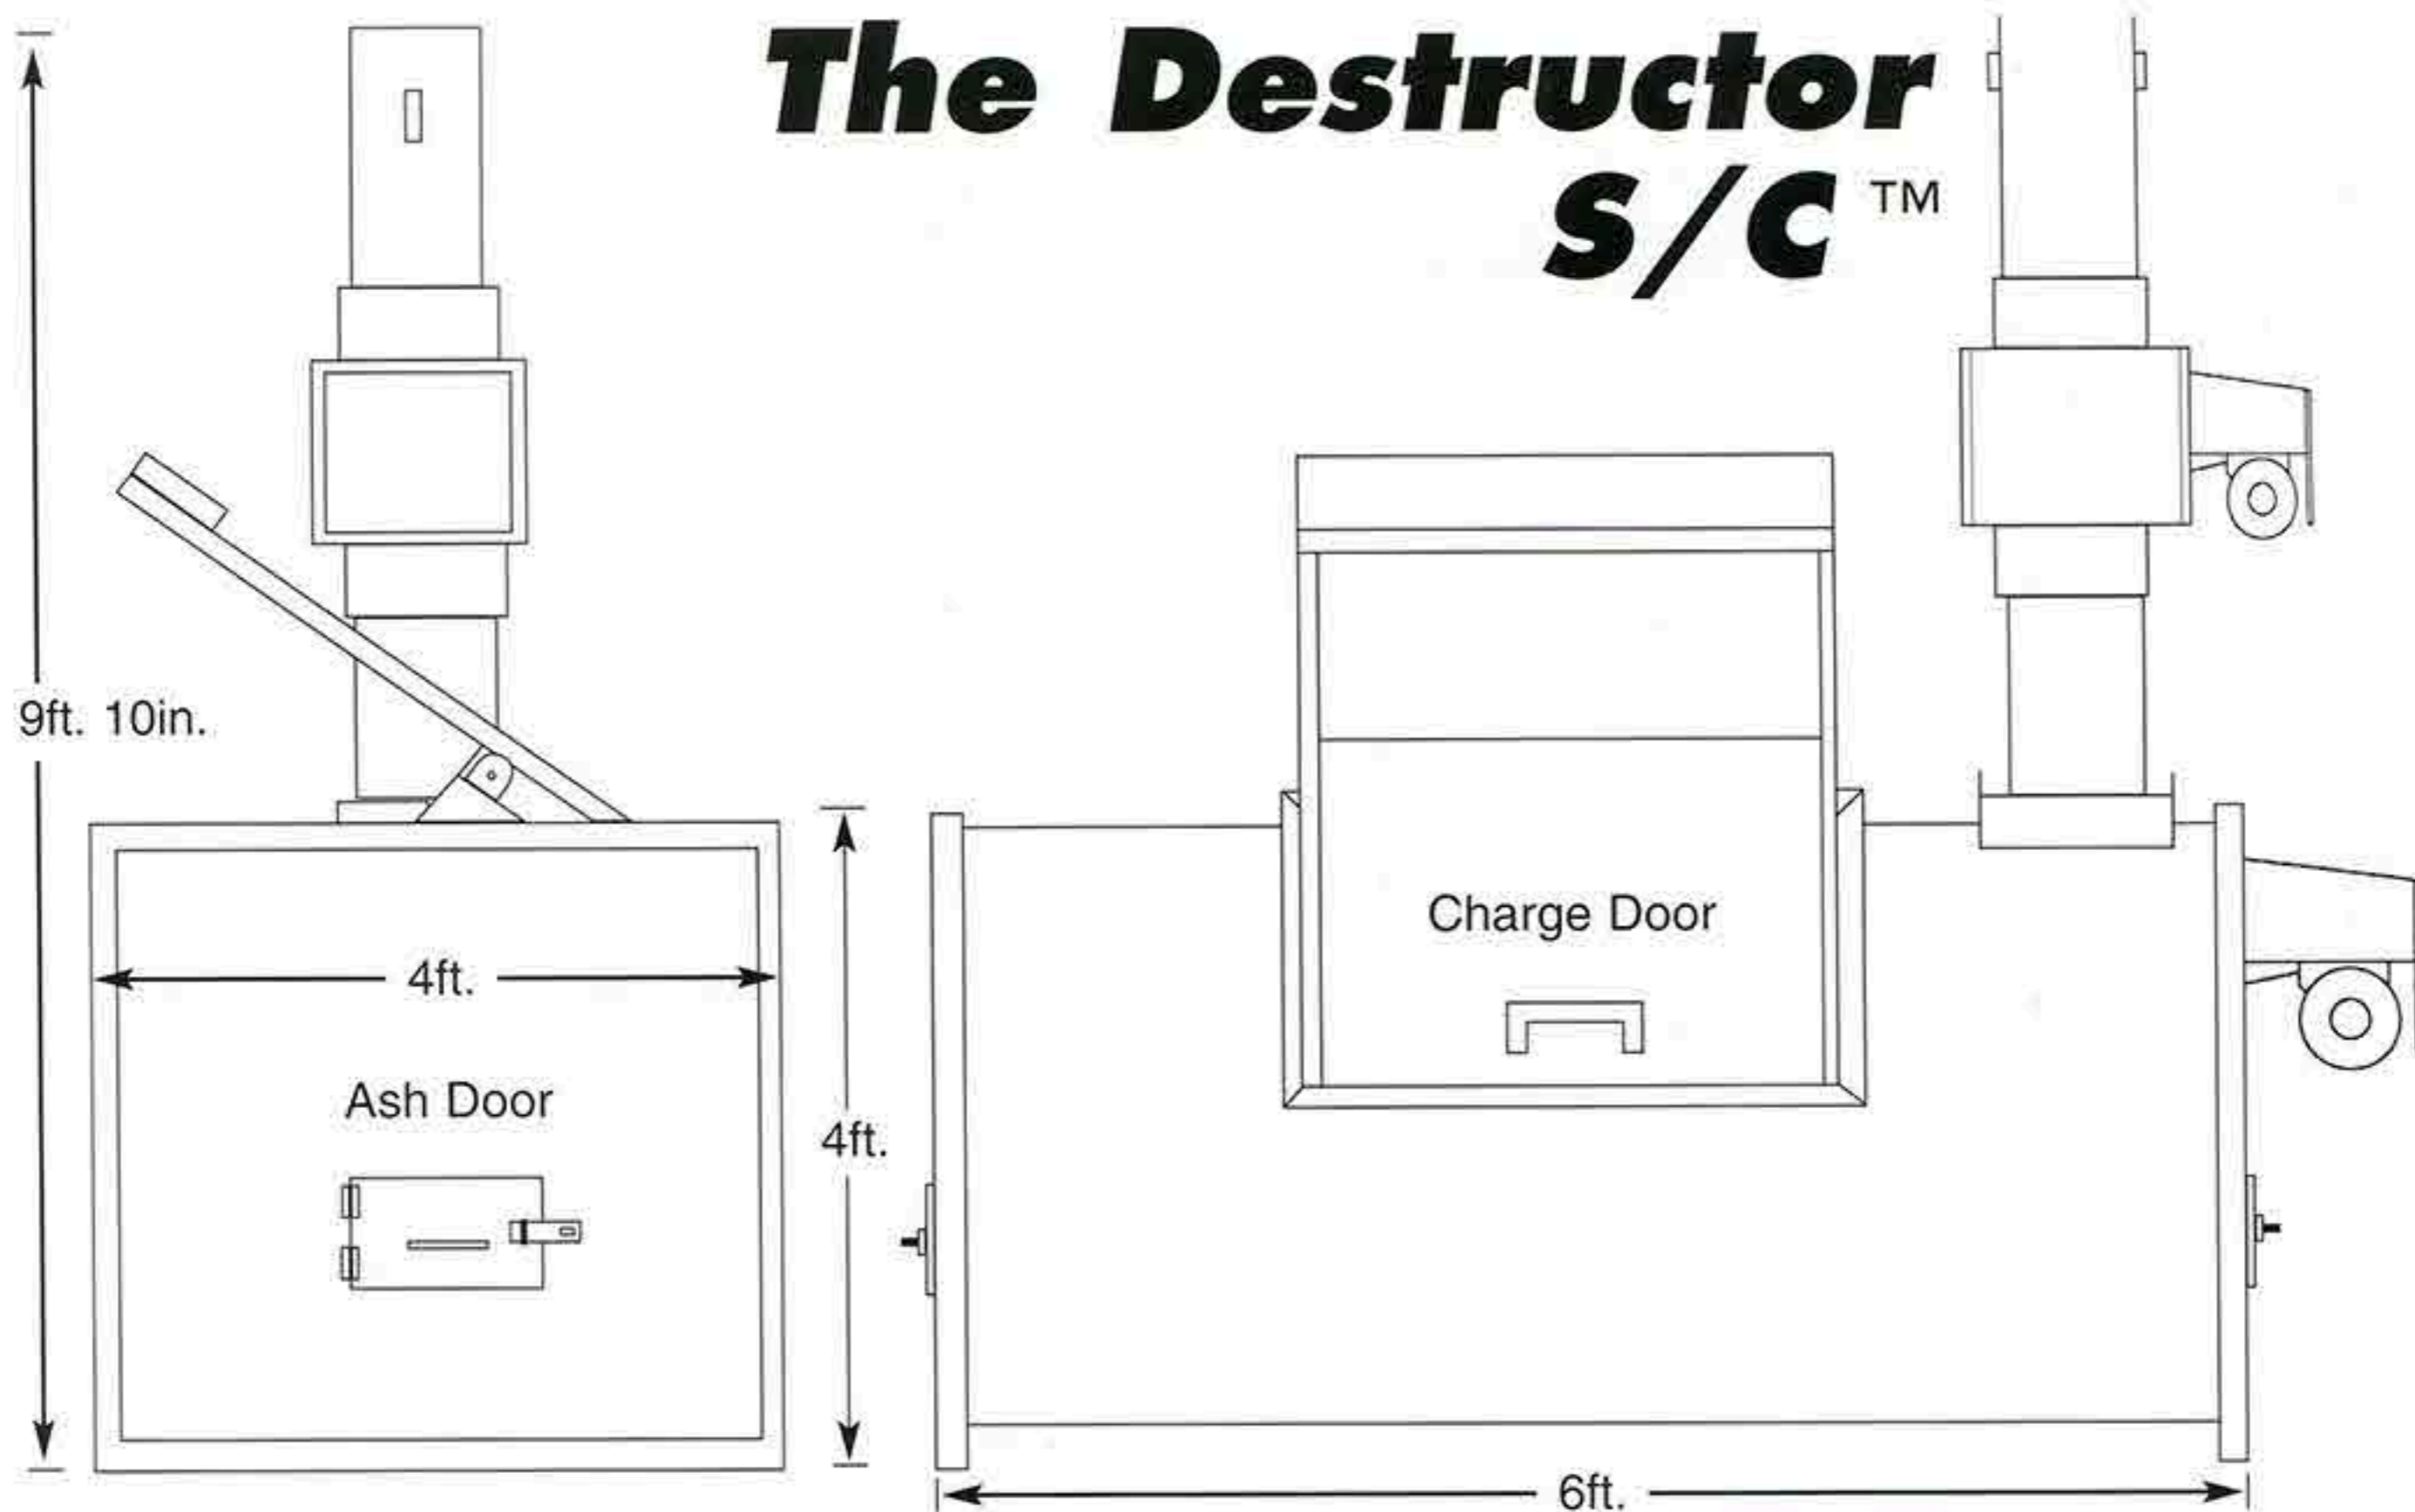

Electrical & Gas Specifications

Customer to connect power and gas to unit.
Customer also to furnish pad for incinerator.

Power: 115V

Natural Gas: 5" to 8" W.C. gas pressure
Minimum 1-1/2" gas pipe

LP Gas: Low pressure
Minimum 5/8" gas pipe

Specifications

Height: 9'10" **Length:** 6' **Width:** 4'

Weight: 6,750 lbs.

Metal: 11 gauge **Lining:** 5-inch 3000° refractory

Poultry

Charge Door: 17" x 24" **Lining:** 4" 3,000° refractory

Swine

Charge Door: 17" x 36" **Lining:** 4" 3,000° refractory

Second Chamber: 5'-7" **Lining:** 2-inch refractory lining

Ash Door: 6" x 11" (both ends)

Lining: 2-inch 3000° refractory

Grates: 6 grates 30" long

Burners: 300,000 BTU incinimite burner with cover and
50,000 BTU Secondary chamber burner with cover

Clean-out Rod: 60" long

Two Timers: 6 hour

Warranty

National Incinerator, Inc. guarantees all materials and workmanship used in the construction of its incinerator including the refractory for a one year period from date of installation. All purchased electrical parts such as burners, fans, timers, and other controls will carry the applicable manufacturer's guarantee of 90 days. Seller shall not be liable for any injury or damage to person or property or any other incidental or consequential damages.



**NATIONAL
INCINERATOR
INCORPORATED**

P.O. BOX 266

BOAZ, AL 35957

(205) 589-6720 • FAX (205) 589-2326