



FEATURES

- · Single-jet meter
- · Compact brass body
- Union couplings
- · Easy installation and maintenance
- Interfaces with many controls and displays

APPLICATIONS

- Industrial control operations
- Low flow situations
- Clean water



GENERAL INFORMATION

The SEB is a plated brass low flow meter suited for clean water. It is available in 1/2" and 3/4" thread, with union-type meter couplings for easy installation and service. This meter is ideal for flow rates between 0.2 and 18 GPM. The SEB has only one moving part, the propeller.

A 5-30 Vdc current sinking pulse output makes the SEB ideal for many industrial control applications. This signal interfaces easily with programmable logic controllers and computer input boards. SEB meters can also be used in conjunction with the Seametrics FT420 flow computer for reading flow rate and total flow, or A055 for 4-20 mA output. For metering pump pacing applications, a standard PD10 pulse divider is recommended.


SPECIFICATIONS*

Sensor		GMR 5-30 Vdc current sinking pulse	
Fittings		1/2", 3/4" male NPT union couplings	
Materials Body		Nickel-plated brass	
	Rotor Chamber	Brass	
	Rotor	Thermoplastic	
	Shaft	Tungsten carbide	
	Bearings	Water-cooled thermoplastic	
Maximum Temperature		185° F (85° C)	
Maximum Pressure		175 psi (12 bar)	
Cable		#22 AWG 3-cond, 12' Maximum run 2,000' (610 m)	
Flow Range		1/2": 0.2 - 10 gallons per minute	
		3/4": 0.2 - 18 gallons per minute	
Standard K-Factor		1/2": 550 pulses per gallon	
		3/4": 330 pulses per gallon	
Accuracy		+/- 1% of full scale	
Regulatory		(€ Mark	

^{*}Specifications subject to change. Please consult our website for the most current data (www.seametrics.com).

SEB Low Flow Meter

FEATURES

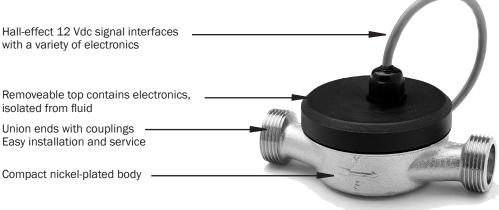



INSTALLATION and MAINTENANCE

Installation. Single-jet meters like the SEB are somewhat insensitive to upstream and downstream flow conditions. For best results, however, upstream and downstream straight pipe of five pipe diameters is recommended.


Maintenance. The SEB's Hall-effect sensor and cap are field-replaceable.

DIMENSIONS

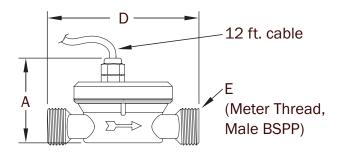

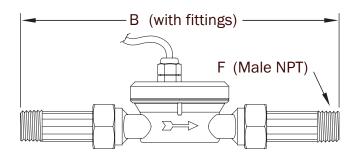

SENSOR CONNECTION



Dim.	1/2 Inch	3/4 Inch
А	2.5	2.5
В	9.2	10.4
С	2.8	2.8
D	4.35	5.1
Е	3/4 in. BSPP	1 in. BSPP
F	1/2 NPT	3/4 NPT

HOW TO ORDER

SEB 1/2" = -050 3/4" = -075 SEB ACCESSORIES Remote rate and total display = FT420W Pulse divider = PD10 4-20 mA output = AO55W

CONTACT YOUR SUPPLIER