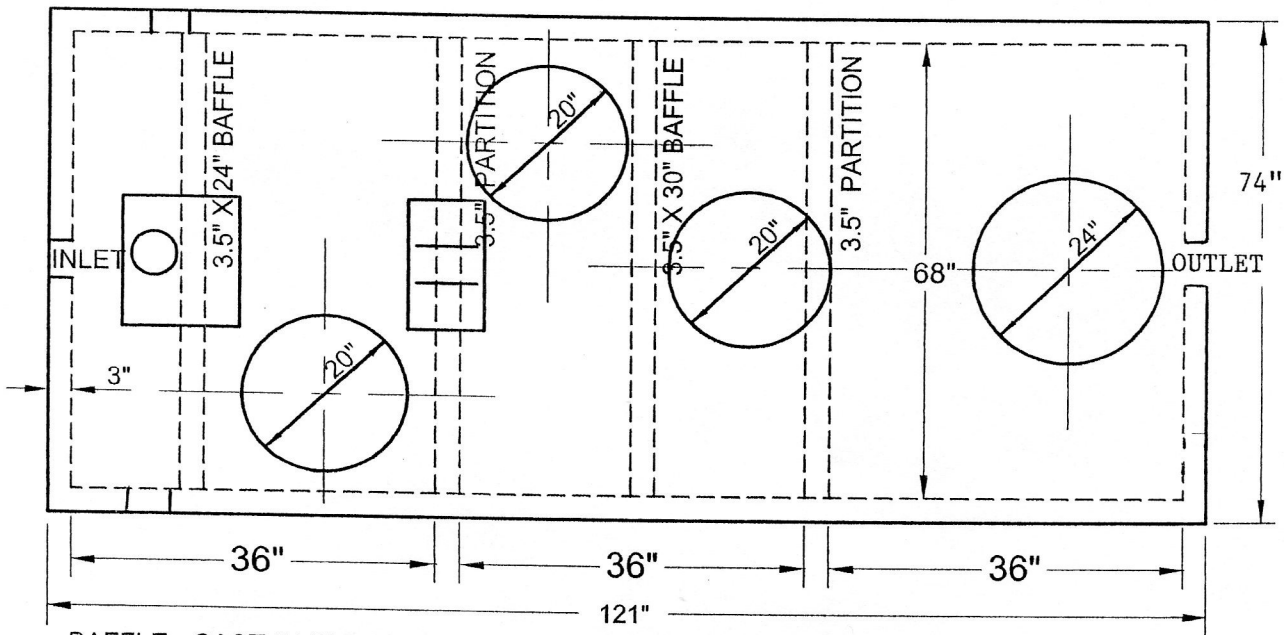

BAFFLE - CAST IN PLACE
PIPE SEALS - HIGH PRESSURE BOOT
TANK SEAL - FEDERAL SPEC. ASTM C990
CONCRETE - STEEL REINFORCED
- 28 DAY 6100 PSI

EACH CHAMBER
519 GAL
10.6 GAL PER INCH

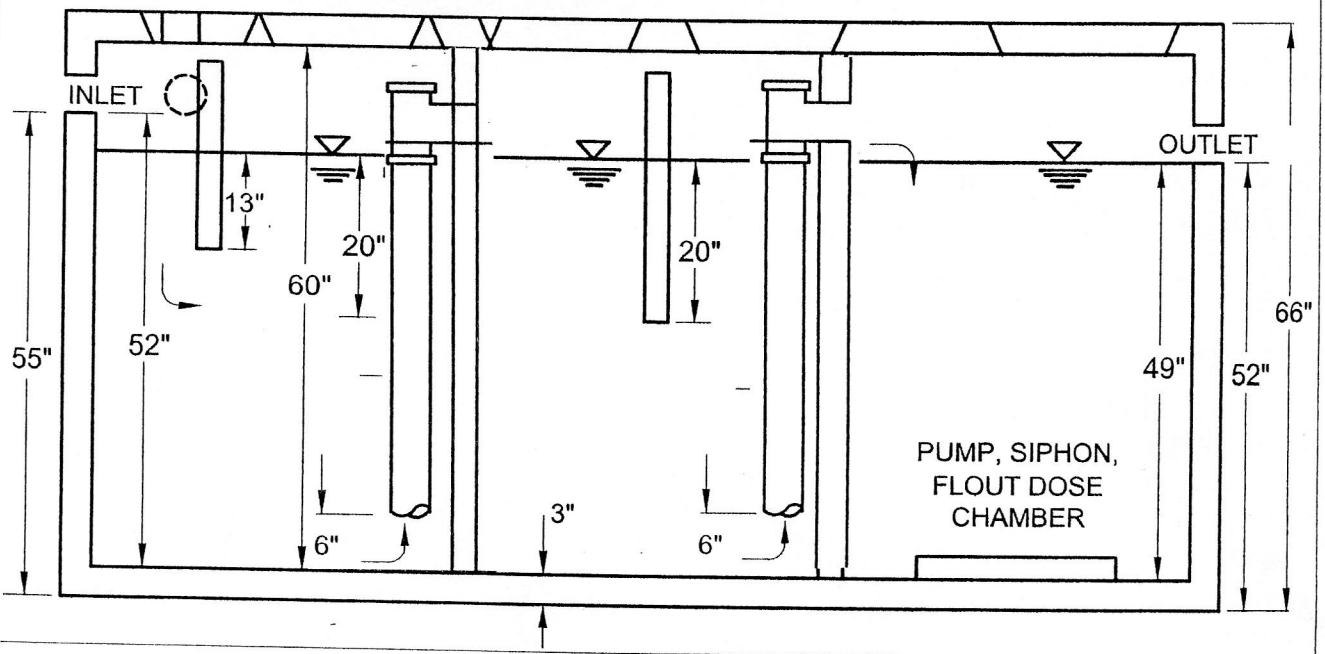

Concrete 1500 gal. 3 Compartment
Grit/Oil and Water Separator

Lycoming, A division of Lycoming Burial Vault Co., Inc.
350 Spruce Street Montoursville, PA 17754
Phone: (570) 368-8642 Toll Free: (800) 640-0052 Fax: (570) 368-2299

Drawn by: Wentz & Webster Engineering 11/21/08