

10.1" TOUCH SCREEN GIVING ACCESS TO ALL FUNCTIONS WITHOUT THE REQUIREMENT OF ACTUAL KEYS

STANDARD PRINTING RESOLUTION DELIVERY 1,200 X 1,200 DPI, WITH PAPER FORMAT RANGE A6 TO SRA3

8 GB RAM MEMORY AS STANDARD, NO ADDITIONAL MEMORY EXPANSION INSTALLATION REQUIRED

256 GB SSD MEMORY (TECHNOLOGY CUTS DATA ACCESS TIMES SIGNIFICANTLY) WITH DATA ENCRYPTION AND OVERWRITING COMPLIANT WITH ISO/IEC 15408

COMPLETE SUITE OF OPTIONS FOR SCANNING, FINISHING AND PAPER DRAWERS TO REACH A MAX CAPACITY OF 6,650 SHEETS

NEW BITDEFENDER® ANTIVIRUS FOR SCANNING INPUT/OUTPUT DATA IN REAL-TIME (OPTIONAL)

HIGH COLOUR SCANNING THROUGHPUT REACHING 200 IPM

NEW FORMULA TONER WITH LOWER MELTING TEMPERATURE

IMPROVED RELIABILITY AND LOWER ENVIRONMENTAL IMPACT

d-Color MF259, MF309, MF369



New 10.1" multi-touch operator panel, which can vibrate to provide greater touch sensitivity



d-Color MF309 with DF-714+PC-416+LU-302+RU-513+FS-536SD

EFFICIENCY AND SECURITY

The d-Color MF259, d-Color MF309 and d-Color MF369 boast an intuitive user interface with a 10.1" touch screen. Physical keys are no longer present, although a traditional keypad is available as an option. The user operates tasks on the touch panel which has an innovative vibration feature for added touch sensitivity.


For improved efficiency and shorter response times, these models are provided with a generous 8 GB RAM memory and 256 GB SSD memory as standard. Warm-up time is greatly reduced to as little as 13 seconds while scanning speeds of the new DF-714

Dual Scan feeder reach 100 ipm in simplex and 200 ipm in duplex.

The life-time of drums and developer units has been extended considerably, contributing towards limiting the number of routine maintenance calls needed, resulting in the reduction of running costs.

Another interesting development is that these models are the first within the Olivetti range to feature an antivirus application (as an option), enabling jobs to be scanned in real-time to prevent potentially harmful virus attacks. Scanning of user mailboxes and SMB/system folders can be performed manually or automatically scheduled.

CONFIGURATION CHART

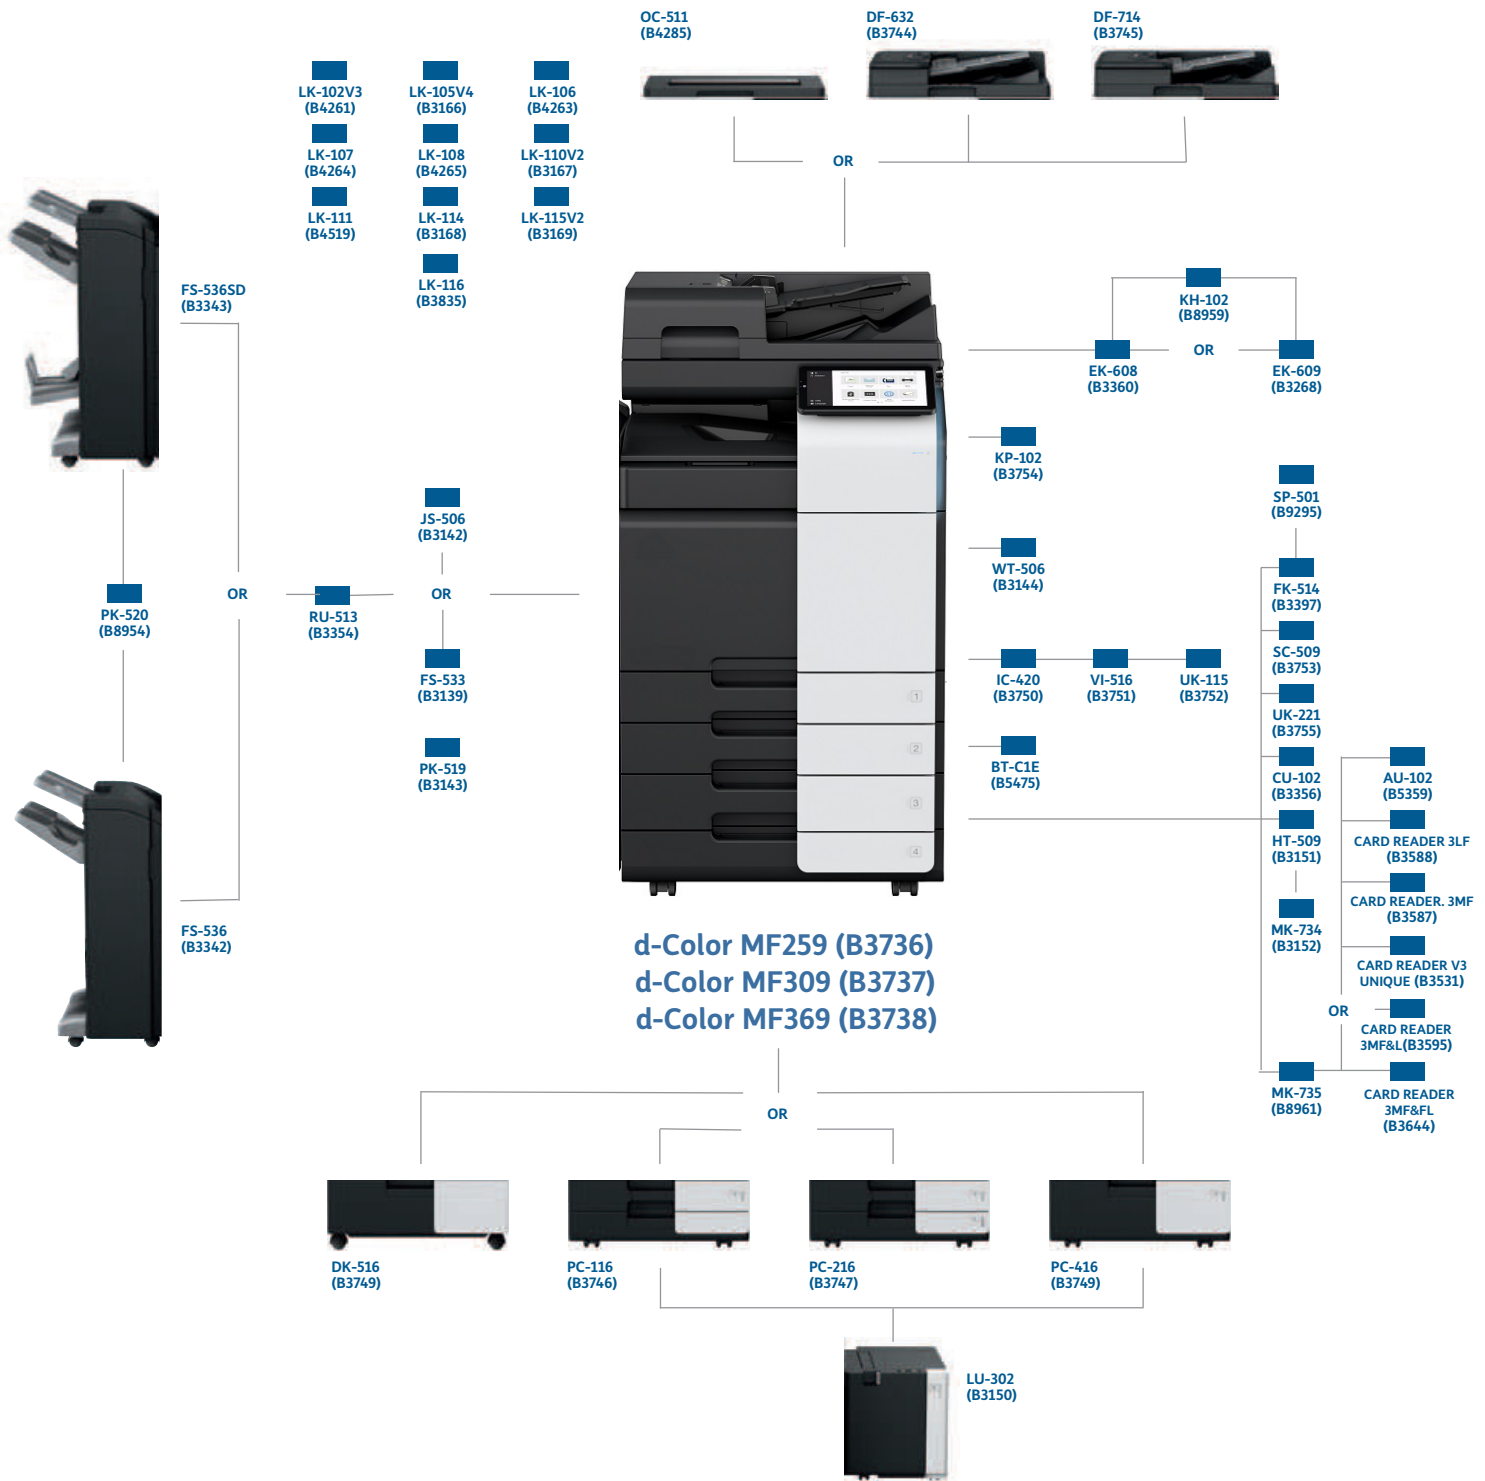

OPTIONS ALPHABETIC LISTING

AU-102	Biometric Authentication Device	LK-107	Unicode Printing Font
BT-C1e	Banner Paper Feed Tray	LK-108	OCR A and B Font Support
CU-102	Air Filter	LK-110v2	Format Converter, including DOCX, XLSX and PDF/A
DF-632	Originals Reverse ADF, 100-sheet capacity	LK-111	ThinPrint® Client
DF-714	Originals Single ADF, 100-sheet capacity	LK-114	Pull-Printing / Follow-me Print Solution
DK-516	Desk for use instead of Paper Drawers	LK-115v2	Trusted Platform Module for Encrypted Data Protection
EK-608	USB Kit for optional External Keypad Connection	LK-116	Antivirus Bitdefender® real-time Data Scanning
EK-609	USB Kit for optional External Keypad and Bluetooth Connections	MK-735	Card Reader Internal Mount Rack
FK-514	Super G3 Fax Card	OC-511	Scan Bed Cover
FS-533	Integrated Finisher, 500-sheet, Stapling up to 50 sheets	PC-116	One A3/A4 Universal Paper Drawer, 500-sheet
FS-536	External Finisher, 3,300-sheet, Stapling up to 50 sheets	PC-216	Two A3/A4 Universal Paper Drawers, 500-sheet (each)
FS-536SD	External Finisher, 3,300-sheet, Stapling up to 50 sheets, Booklet-making up to 20 sheets	PC-416	A4 Paper Drawer, 2500-sheet
KH-102	USB Keypad Rack	PK-519	2/4 Hole-punch for FS-533
KP-102	Touch Screen Keypad	PK-520	2/4 Hole-punch for FS-536/FS-536SD
IC-420	Fiery Print Controller	RU-513	Relay Unit for FS-536/FS-536SD
JS-506	Job Separator instead of Finishers	SC-509	Originals Copy Prevention Kit with Security Pattern
LC-302	High Capacity Side Drawer, 3,000-sheets, A4 format	UK-115	Fiery IC-420 Controller Interface Card
LK-102v3	Conversion to PDF/A (1b), encrypted PDF and Digital Signature	UK-221	LAN Wireless and LAN Access Point
LK-105v4	OCR Conversion to Searchable PDF format and PPTX	VI-516	Video interface for Fiery IC-420 Controller
LK-106	Barcode Printing Font	WT-506	Card Reader External Mounting Rack

TECHNICAL SPECIFICATIONS

GENERAL

Touch Screen Size / Resolution: 10.1" / 1024 x 600
RAM Memory: 8,192 MB, as standard
System memory: 256 GB SSD
Interfaces: Ethernet 10/100 / 1000-Base-T; USB 2.0; Wi-Fi 802.11 b / g / n (optional)
Network Protocols: TCP / IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP (S); AppleTalk; Bonjour
Automatic Document Feeder (optional): Up to 100 originals; A6-A3; 35-163 g/m²; RADF (DF-632) or Dual-Scan (DF-714) versions available
Paper Capacity: (standard / max) 1,150 sheets / up to 6,650 sheets
Paper Drawer 1 (standard): 500 sheets; A6-A3 formats; custom formats; 52-256 g/m²
Paper Drawer 2 (standard): 500 sheets; A5-SRA3; custom formats; 52-256 g/m²
PC-116 Optional Paper Drawer : 1 x 500-sheets; A5-A3; 52-256 g/m²
PC-216 Optional Paper Drawer: 2 x 500-sheets; A5-A3; 52-256 g/m²
PC-416 Optional Paper Drawer: 1 x 2,500-sheets; A4; custom formats; 52-256 g/m²
LC-302 Optional High Capacity Paper Drawer: 1 x 3,000-sheets; A4; custom formats; 52-256 g/m²
Manual Bypass : 150-sheets; A6-SRA3; custom formats; Banner; 60-300 g/m²
Duplex: Automatic A5-SRA3; 52-256 g/m²
Finishing Options: Offset; Group; Sorting; Base; Hole Punching; Saddle Stitch, Letter; Booklet
Output Tray Capacity (standard): up to 250 sheets
Output Tray Capacity (optional): up to 3,300 sheets
Stapling: 50 sheets max. or 48 sheets + 2 cover sheets (up to 209 g/m²)
Letter Folding: 3 sheets max.
Booklet Folding: 20 sheets max. or 19 sheets + 1 cover (up to 209 g/m²)

Print Volume (monthly):

Recommended 25,000 pages;
Max. ¹ 150,000 pages

Power Consumption:

220-240 V / 50/60 Hz;
Under 1.58 kW

System Dimensions:

(L x D x H) 615 x 688 x 779 mm (without options)

System Weight:

84.0 kg approx (without options)

CONSUMABLES

Black Toner d-Color MF259 / MF309 / MF369:

Yield up to 28,000 prints (A4 page format, with 5% cover, continuous printing mode).

Colour Toner C/M/Y d-Color MF259 / MF309 / MF369:

Yield up to 28,000 prints (A4 page format, with 5% cover, continuous printing mode).

Black Drum:

Yield up to 170,000 prints - d-Color MF259), 225,000 prints - d-Color MF309 / d-Color MF369

Colour Drum:

Yield up to 65,000 prints - d-Color MF259, 90,000 prints - d-Color MF309, 105,000 prints - d-Color MF369

Developer Black:

Yield up to 1000,000 prints all models

Developer Colour :

Yield up to 1000,000 prints all models

Waste Toner Box:

Capacity up to 44,000 prints

COPY FUNCTIONS

Technology: Laser
Toner Technology: Polymerised Toner
Copy Speed A4 (mono/colour):
Up to 25/25 ppm - d-Color MF259,
Up to 30/30 ppm - d-Color MF309,
Up to 36/36 ppm - d-Color MF369
Copy Speed A3 (mono/colour):
Up to 15/15 ppm - d-Color MF259,
Up to 15/15 ppm - d-Color MF309,
Up to 18/18 ppm - d-Color MF369
Copy Speed A4 Duplex (mono/colour):
Up to 25/25 ppm - d-Color MF259,
Up to 30/30 ppm - d-Color MF309,
Up to 36/36 ppm - d-Color MF369,
First Copy-out Time (mono/colour):
5.2 / 6.9 secs - d-Color MF259,
5.0 / 6.7 secs - d-Color MF309,
4.6 / 6.1 secs - d-Color MF369
Warm-up Time: 11 secs approx mono; 13
secs colour (warm-up time may vary depending on
environmental conditions and type of use)
Copy Resolution: 600 x 600 dpi
Levels of Grey: 256
Multiple Copies: 1-9,999
Original Formats: A6-A3; custom formats
Enlargement: 25-400% in steps of 0.1%; Auto-zoom

PRINT FUNCTIONS

Print Resolution: 1,800 (equivalent) x 600
dpi; 1200 x 1200 dpi
Print Speed: A4 (mono / colour)
Up to 25/25 ppm - d-Color MF259
Up to 30/30 ppm - d-Color MF309,
Up to 36/36 ppm - d-Color MF369
Page Description Language: PCL 6 (XL3.0); PCL
5c; PostScript 3 (CPSI 3016); XPS
Operating Systems: Windows 7 (32/64); Windows 8
/ 8.1 (32/64); Windows 10 (32/64); Windows Server
2008 (32/64); Windows Server 2008 R2;
Windows Server 2012; Windows Server 2012 R2;
Windows Server 2016; Windows Server 2019;
Macintosh OS X 10.10 or later; Unix; Linux; Citrix
Print Font: 80 PCL Latin; 137 PostScript 3
Emulation Latin
Mobile Printing: AirPrint (iOS); Mobile Print
app (iOS/Android/Windows 10 Mobile); Mobile
Authentication and Pairing (iOS/Android), Optional;
Google Cloud Print; WiFi Direct

FIERY PRINT CONTROLLER (OPT.)

Print Controller: Embedded Fiery IC-420
CPU Controller: AMD GX-424CC @ 2.4 GHz
Memory: HDD 2,048 MB / 500 GB
Page Description Language: Adobe
PostScript 3 (CPSI 3020); PCL 6; PCL 5c

SCAN FUNCTIONS

Scan Speed (mono/colour) : Up to 100/100
ipm simplex, up to 200/200 ipm duplex
Scan Mode: Scan-to-Email (Scan-to-Me);
Scan-to-SMB (Scan-to-Home); Scan-to-FTP; Scan-to-box;
Scan-to-USB; Scan-to-WebDAV; Scan-to-
URL; TWAIN Scanning
File Formats: JPEG; TIFF; PDF; compact PDF;
encrypted PDF; XPS; compact XPS; PPTX; searchable PDF
(optional); PDF / A 1a and 1b (optional);
Searchable DOCX / PPTX / XLSX (optional)
Scan Destinations: 2,100 (single + group);
LDAP support

FAX FUNCTION (FK-514 OPTIONAL)

Standard Fax: Super G3
Fax Transmission: Analogue; I-Fax; i-Fax Colour;
IP-Fax
Fax Resolution: Up to 600 x 600 dpi
Fax Compression: MH; MR; MMR; JBIG
Fax Modem Speed: Up to 33.6 Kbps
Fax Destinations: 2,100 (single + group)

SYSTEM FEATURES

Security Functions (standard): ISO 15408 HCD-PP
Common Criteria (in evaluation); IP Filtering
and Port Blocking; SSL2; SSL3 and TLS1.0/1.1/1.2 network
communications ; IPsec support; IEEE support;
User Authentication: Log Authentication; Secure Printing;
Kerberos;
SSD Memory Protection: Overwriting (8 standard
types); Data Encryption (AES 256); Automatic Memory
Data Deletion; Confidential Fax Reception; User Data
Encryption;
Security Functions (optional): Antivirus with real-time
Scanning (Bitdefender®);
Protected Copying: Copy Protection (Copy Guard),
Copy Password;
Accounting Functions (standard): up to 1,000 User
Accounts; Active Directory Support (user name +
password + e-mail + SMB folder); User Profile Definitions;
Accounting Functions (optional): Biometric
Authentication (Finger Vein Pattern recognition);
Card Authentication: via RDFI Card (ID Card Reader);
Mobile Device Authentication: Android/iOS;

¹ All specifications refer to A4 paper format weight 80 g/m².