



# Line Voltage LED Lamp Bulb



## Dimmable Multi-LED Tubular Striplights



- Energy saving with low power consumption
- Perfect retrofit traditional incandescent striplights
- Direct AC input with integrated driver
- Compatible with common dimmer switches and systems
- Smooth linear dimming range from 10%-100% without visible flickering
- Noise free during the dimming operation
- Good color rendition, Ra ≥80
- No mercury and hazardous substances
- Housing : PC

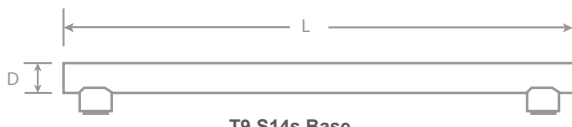

**T9 S14s Base**

5W	~	35W
8W	~	60W
16W	~	120W

**T8 S15 Base / T12 S19 Base**

4W	~	30W
6W	~	60W
7W	~	60W

**T9 S14d Base**

5W	~	35W
8W	~	60W



Model	Voltage	Wattage	Base	Beam Angle	Color Temp	Lumen	Diameter D (in)	Length L (in)
LED NA S14s T9 TP 5W	120V	5W	S14s	270°	2700K	400 lm	1.18	11.8
LED NA S14s T9 TP 5W DIM	120V	5W	S14s	270°	2700K	400 lm	1.18	11.8
LED NA S14s T9 TP 8W	120V	8W	S14s	270°	2700K	650 lm	1.18	19.7
LED NA S14s T9 TP 8W DIM	120V	8W	S14s	270°	2700K	650 lm	1.18	19.7
LED NA S14s T9 TP 16W	120V	16W	S14s	270°	2700K	1250 lm	1.18	39.4
LED NA S14s T9 TP 16W DIM	120V	16W	S14s	270°	2700K	1250 lm	1.18	39.4
LED NA S14d T9 TP 5W	120V	5W	S14d	270°	2700K	400 lm	1.18	11.8
LED NA S14d T9 TP 5W DIM	120V	5W	S14d	270°	2700K	400 lm	1.18	11.8
LED NA S14d T9 TP 8W	120V	8W	S14d	270°	2700K	650 lm	1.18	19.7
LED NA S14d T9 TP 8W DIM	120V	8W	S14d	270°	2700K	650 lm	1.18	19.7
LED NA S15 T8 TP 4W	120V	4W	S15	270°	2700K	300 lm	1.02	8.70
LED NA S15 T8 TP 4W DIM	120V	4W	S15	270°	2700K	300 lm	1.02	8.70
LED NA S15 T8 TP 6W	120V	6W	S15	270°	2700K	450 lm	1.02	11.2
LED NA S15 T8 TP 6W DIM	120V	6W	S15	270°	2700K	450 lm	1.02	11.2
LED NA S19 T12 TP 7W	120V	7W	S19	300°	2700K	550 lm	1.50	12.2
LED NA S19 T12 TP 7W DIM	120V	7W	S19	300°	2700K	550 lm	1.50	12.2